

GENERAL TIRE 

GENERALTIRE.COM



PASSENGER & LIGHT TRUCK

PRODUCT DATA GUIDE

2025 | 1ST EDITION



DELIVERS

Making the most of every moment can be demanding. Which is why, at General Tire, we think you should demand more from your tires. For more than a century, we've made great all around tires that always deliver the right combination of performance, durability, style and value. All so we can deliver the tire experience you need for whatever life demands. Taking the kids to school and back? We deliver reliability. Turning heads on the daily commute? We deliver distinction. Tackling your favorite off road trail? We deliver more traction. For all kinds of reasons, for all kinds of seasons, General Tire delivers. Because that's what we demand of ourselves. And that's what we think you deserve.

General Tire does not recommend replacing one tire at a time on a vehicle. Fitting a vehicle with an improper mix of tire sizes, constructions, and speed ratings can be dangerous. Consult the vehicle owner's manual to determine proper mixing, matching, or when replacing tires with different sizes, constructions, and speed ratings. If all of the ground tires are not replaced at one time, then at a minimum, General Tire recommends replacing all tires on the same axle at one time (see the vehicle owner's manual for 4x4 vehicles for whether there are additional recommendations). This is especially recommended for tires that are listed in this product guide with alternate article numbers. Tires that are identified with alternate article numbers are nearly identical to the tires that they are replacing, but may have slight differences. One difference can be the tread design or pattern which can make the alternate tires incompatible for mixing on the same axle as a different tire.

CONTENTS

PRODUCT OVERVIEW

PRODUCT LINE OVERVIEW	4
TECHNOLOGY OVERVIEW	6
FLOTATION SIZE EQUIVALENCY CHART	8
QUICK REFERENCE GUIDE	10

REPLACEMENT TIRE PRODUCTS

ULTRA-HIGH PERFORMANCE

G-MAX RS SUMMER PASSENGER & CROSSOVER	20
G-MAX AS ⁰⁷ ALL-SEASON PASSENGER, CROSSOVER, LIGHT TRUCK & SUV	24

TOURING

Altimax RT ⁴⁵ ALL-SEASON PASSENGER & CROSSOVER	30
Altimax ^{365 AW} ALL-WEATHER PASSENGER & CROSSOVER	36
Grabber H/T ALL-SEASON CROSSOVER, LIGHT TRUCK & SUV	40

ALL-TERRAIN

Grabber APT ALL-SEASON CROSSOVER, LIGHT TRUCK & SUV	46
Grabber A/T ^x ALL-SEASON LIGHT TRUCK & SUV	48
Grabber X ³ ALL-SEASON LIGHT TRUCK & SUV	52

WINTER

Altimax Arctic ¹² STUDDABLE TOURING PASSENGER & CROSSOVER	56
Grabber Arctic STUDDABLE TOURING LIGHT TRUCK & SUV	60
Grabber Arctic LT STUDDABLE TOURING LIGHT TRUCK & SUV	62

GOVERNMENT & FLEET / COMMERCIAL

Grabber HD ALL-SEASON LIGHT TRUCK & SUV	66
Grabber HD Van ALL-SEASON CARGO VAN	68
G-MAX Justice ALL-SEASON HIGH-SPEED PURSUIT	70
G-MAX Justice AW ALL-WEATHER HIGH-SPEED PURSUIT	72

ORIGINAL EQUIPMENT PRODUCTS

OE PRODUCT LINE OVERVIEW	74
OE REFERENCE GUIDE PRODUCT LINE	75
OE REFERENCE GUIDE VEHICLE FITMENT	76

WARRANTY INFORMATION

SHIELD+ ADVANTAGE PLAN: LIMITED WARRANTY & ADJUSTMENT POLICY	78
TREADWEAR CONVERSION TABLE	80
LEGAL OBLIGATION	81

REPLACEMENT PRODUCT LINE OVERVIEW



AltiMAX[®] 365 AW

A versatile, all-weather touring tire for passenger cars and crossovers, the AltiMAX[®] 365 AW ranges in size from 15-20" rim diameter.



AltiMAX Arctic¹²

A studdable winter tire for passenger cars and crossovers, the AltiMAX Arctic¹² ranges in size from 14-19" rim diameter.



AltiMAX RT⁴⁵

A long-lasting, all-season touring tire for passenger cars and crossovers, the AltiMAX RT⁴⁵ ranges in size from 14-20" rim diameter.



G-MAX AS⁰⁷

A dynamic, all-season ultra-high performance tire for passenger cars, crossovers, light trucks and SUVs the G-MAX AS⁰⁷ ranges in size from 16-24" rim diameter.



G-MAX Justice

A durable, all-season high-speed pursuit tire for government and fleet vehicles, the G-MAX Justice ranges in size from 17-20" rim diameter.



G-MAX Justice AW

A versatile, all-weather high-speed pursuit tire for government and fleet vehicles, the G-MAX Justice AW ranges in size from 17-20" rim diameter.



G-MAX RS

An excellent, summer ultra-high performance tire for passenger cars and crossovers, the G-MAX RS ranges in size from 16-20" rim diameter.



Grabber A/T^X

An aggressive, all-season all-terrain tire for light trucks and SUVs, the Grabber A/T^X ranges in size from 14-22" rim diameter.



Grabber APT

A durable, all-season all-terrain tire for crossovers, light trucks and SUVs, the Grabber APT ranges in size from 16-22" rim diameter.



Grabber Arctic

A studdable winter tire for light trucks and SUVs, the Grabber Arctic ranges in size from 16-20" rim diameter.



Grabber Arctic LT

A studdable winter tire for light trucks and SUVs, the Grabber Arctic LT ranges in size from 16-20" rim diameter.



Grabber HD

A durable, all-season commercial tire for light trucks and SUVs, the Grabber HD ranges in size from 16-18" rim diameter.



Grabber HD Van

A durable, all-season commercial tire for cargo vans, the Grabber HD Van ranges in size from 15-16" rim diameter.



Grabber H/T

A long-lasting, all-season touring tire for crossovers, light trucks and SUVs, the Grabber H/T ranges in size from 15-22" rim diameter.



Grabber X³

An extreme, all-season mud-terrain tire for light trucks and SUVs, the Grabber X³ ranges in size from 15-20" rim diameter.

REPLACEMENT PRODUCT LINE OVERVIEW CHART

PRODUCT LINES	TREAD PATTERN	RIM SIZE	SPEED RATING	UTQG (WEAR, TRACTION, TEMPERATURE)	MILEAGE WARRANTY*	CUSTOMER SATISFACTION TRIAL	PAGE #
AltiMAX ^{365 AW}	Symmetric	15"-20"	H, V	640 A A (H) 540 A A (V)	60,000 Miles	45 Days	36
AltiMAX Arctic ¹²	Directional	14"-19"	T	--	--	45 Days	56
AltiMAX RT ⁴⁵	Symmetric	14"-20"	T, H, V	600 A B (T) 600 A A (H, V) 700 A B (T) 700 A A (H, V)	75,000 Miles (T & H) 65,000 Miles (V)	45 Days	30
G-MAX AS ⁰⁷	Asymmetric	16"-24"	V, W	500 AA A (Load ≤ 103)	500 A A (Load ≥ 104)	50,000 Miles	45 Days
G-MAX Justice	Asymmetric	17"-20"	V, W	440 AA A	--	--	70
G-MAX Justice AW	Symmetric	17"-20"	V	540 A A	--	--	72
G-MAX RS	Directional	16"-20"	W, Y	360 AA A	--	45 Days	20
Grabber A/T ^X	Symmetric	14"-22"	Q, R, S, T	640 A B (Excludes LT)	60,000 Miles (Metric) 50,000 Miles (LT)	45 Days	48
Grabber APT	Symmetric	16"-22"	R, S, T, H	520 A B (Excludes LT)	60,000 Miles	45 Days	46
Grabber Arctic	Directional	16"-20"	T	--	--	45 Days	60
Grabber Arctic LT	Symmetric	16"-20"	R	--	--	45 Days	62
Grabber HD	Symmetric	16"-18"	R, S	--	--	45 Days	66
Grabber HD Van	Symmetric	15"-16"	R, T	--	--	45 Days	68
Grabber H/T	Symmetric	15"-22"	S, T H V R, S	720 B B (Metric) 720 B A (Metric) 720 B A (Metric) -- (LT)	70,000 Miles (Metric) 70,000 Miles (Metric) 65,000 Miles (Metric) 50,000 Miles (LT)	45 Days	40
Grabber X ³	Symmetric	15"-20"	Q	--	--	45 Days	52

*Rear axle split fitments will be 50% of standard tread wearout coverage.

TIRE TECHNOLOGY & FEATURES



ex. Grabber A/T^x



ex. G-MAX AS⁰⁷

1

3-Peak Mountain Snowflake



Meets the severe snow service requirements of the U.S. Tire Manufacturer's Association (USTMA) and the Tire and Rubber Association of Canada (TRAC).

Available On:

AltiMAX^{365 AW}
AltiMAX Arctic¹²
G-MAX Justice AW
Grabber A/T^X
Grabber APT
Grabber Arctic
Grabber Arctic LT

2

Duragen Technology



- Enhances strength and durability
- Delivers cut-and-chip resistance
- Extends tread life

Available On:

Grabber A/T^X
Grabber APT
Grabber Arctic
Grabber Arctic LT
Grabber HD
Grabber HD Van
Grabber H/T
Grabber X³

3

Replacement Tire Monitor®




Letters in the tread wear off to read "REPLACE TIRE" when the tire wears to 2/32 of tread depth, indicating a tire change is needed.

Available On:

AltiMAX RT⁴⁵
G-MAX AS⁰⁷
G-MAX RS
Grabber H/T

4

Visual Alignment Indicators®



Indicators in both sides of the tread wear off evenly, ensuring the driver of proper alignment, or wear off unevenly, alerting the driver to check the wheel alignment.

Available On:

AltiMAX^{365 AW}
AltiMAX RT⁴⁵
G-MAX AS⁰⁷
Grabber H/T



AltiMAX[®] 365 AW
▲ VAI



AltiMAX Arctic¹²
▲



AltiMAX RT⁴⁵
RTM ▲ VAI



G-MAX AS⁰⁷
RTM ▲ VAI



G-MAX Justice



G-MAX Justice AW
▲



G-MAX RS
RTM



Grabber A/T^X
▲ EOG



Grabber APT
▲ EOG



Grabber Arctic
▲ EOG



Grabber Arctic LT
▲ EOG



Grabber HD
▲ EOG



Grabber HD Van
▲ EOG



Grabber H/T
▲ EOG RTM VAI



Grabber X³
▲ EOG

Available Features Legend:

▲ 3-Peak Mountain Snowflake ▲ Duragen Technology RTM Replacement Tire Monitor[®] VAI Visual Alignment Indicators[®]

LT METRIC TO FLOTATION SIZE EQUIVALENT

RIM SIZE	LT METRIC SIZE	RIM SIZE	FLOTATION SIZE EQUIVALENT
17	LT285/70R17	17	33X11.00R17
	LT295/70R17		33X11.50R17
	LT315/70R17		35X12.50R17
18	LT275/65R18	18	32X11.00R18
	LT275/70R18		33X11.00R18
	LT285/60R18		32X11.00R18
	LT285/65R18		33X11.00R18
	LT285/70R18		34X11.00R18
	LT285/75R18		35X11.00R18
	LT295/70R18		34x11.50R18
	LT305/65R18		34X12.00R18
	LT315/70R18		36X12.50R18
20	LT275/55R20	20	32X11.00R20
	LT275/65R20		34X11.00R20
	LT285/55R20		32X11.00R20
	LT285/60R20		34X11.00R20
	LT295/55R20		33X11.50R20
	LT295/60R20		34X11.50R20
	LT295/65R20		35X11.50R20
	LT305/55R20		33X12.00R20
	LT315/60R20		35X12.50R20
22	LT325/60R20	22	35X13.00R20
	LT285/50R22		33X11.00R22
	LT325/50R22		35X13.00R22

*Flotation sizes are estimates only and should not be used as a substitute for the recommendation of a certified tire installer. Load ratings and inflation requirements may vary between LT Metric and Flotation sizes. Products should only be used in applications approved by the manufacturer. Please consult your tire installer for a recommendation of the products suitable for your application.

GENERAL TIRE 

DELIVERS

QUICK REFERENCE GUIDE

QUICK REFERENCE GUIDE

RIM DIA (IN)	TIRE SIZE	Altimax 3 SS AW	Altimax Arctic-12	Altimax RT45	G-MAX AS07	G-MAX Justice	G-MAX Justice AW	G-MAX RS	Grabber A/T Sport	Grabber A/T Sport-W	Grabber A/T X	Grabber APT	Grabber Arctic	Grabber Arctic LT	Grabber HD	Grabber HD Van	Grabber H/T	Grabber HTS	Grabber HTS60	Grabber X3
14	27 X 8.50 R 14 LT									●										
	185/60 R 14		●																	
	195/60 R 14		●																	
	175/65 R 14		●																	
	185/65 R 14	●	●																	
	175/70 R 14		●																	
	185/70 R 14		●																	
	195/70 R 14		●																	
	205/70 R 14		●																	
	215/70 R 14		●																	
	225/70 R 14		●																	
15	30 X 9.50 R 15 LT										●									
	31 X 10.50 R 15 LT										●									
	33 X 10.50 R 15 LT																	●		
	33 X 12.50 R 15 LT										●									
	35 X 12.50 R 15 LT																		●	
	185/55 R 15	●		●																
	195/55 R 15		●																	
	185/60 R 15	●	●	●																
	185/60 R 15 C																●			
	195/60 R 15	●	●	●																
	205/60 R 15		●																	
	215/60 R 15			●																
	225/60 R 15			●																
	175/65 R 15	●	●	●																
	185/65 R 15	●	●	●																
	195/65 R 15	●	●	●																
	205/65 R 15	●	●	●																
	215/65 R 15		●																	
	195/70 R 15 C																●			
	205/70 R 15	●	●	●																
	215/70 R 15	●	●	●																
	225/70 R 15		●													●				
	235/70 R 15		●																	
	255/70 R 15															●				
	265/70 R 15										●									
	205/75 R 15										●									
	215/75 R 15										●									
	235/75 R 15																●			
	LT235/75 R 15										●									
	265/75 R 15																●			
16	205/45 ZR 16					●														
	195/50 R 16			●																
	195/50 ZR 16			●																

QUICK REFERENCE GUIDE

RIM DIA (IN)	TIRE SIZE	Altimax 365 AW	Altimax Arctic-12	Altimax RT45	G-MAX AS07	G-MAX Justice	G-MAX RS	G-MAX Justice AW	Grabber A/T Sport	Grabber A/T Sport-W	Grabber A/TX	Grabber APT	Grabber Arctic	Grabber Arctic LT	Grabber HD	Grabber HD Van	Grabber H/T	Grabber HTS	Grabber HTS0	Grabber X3
16	205/50 R 16			●																
	205/50 ZR 16				●															
	225/50 ZR 16				●															
	245/50 ZR 16						●													
	185/55 R 16			●																
	195/55 R 16			●																
	205/55 R 16	●	●	●																
	205/55 ZR 16				●			●												
	215/55 R 16	●	●	●																
	215/55 ZR 16					●														
	225/55 R 16		●	●																
	225/55 ZR 16				●															
	185/60 R 16			●																
	205/60 R 16	●	●	●																
	215/60 R 16	●	●	●																
	225/60 R 16	●	●	●																
	235/60 R 16	●	●																	
	205/65 R 16	●	●	●																
	215/65 R 16	●	●	●										●						
	225/65 R 16	●	●	●																
	235/65 R 16			●																
16	235/65 R 16 C													●				●		
	205/70 R 16			●																
	215/70 R 16	●	●	●										●						
	225/70 R 16	●	●	●																
	235/70 R 16													●				●		
	245/70 R 16																	●		
	255/70 R 16									●								●		
	265/70 R 16								●	●	●							●		
	LT305/70 R 16								●											
	195/75 R 16 C															●				
	225/75 R 16																●			
	225/75 R 16 C															●				
	LT225/75 R 16															●	●	●	●	
	235/75 R 16																		●	
	245/75 R 16													●	●			●		
	LT245/75 R 16									●				●	●			●		
	265/75 R 16																	●		
	LT265/75 R 16									●	●			●	●			●		
	265/75 R 16																	●		
	LT285/75 R 16									●									●	
	LT315/75 R 16									●										
	LT215/85 R 16															●				
	LT235/85 R 16									●					●					
17	33 X 12.50 R 17 LT																		●	

QUICK REFERENCE GUIDE

RIM DIA (IN)	TIRE SIZE	Altimax 35 AW	Altimax Arctic-12	Altimax RT45	G-MAX AS07	G-MAX Justice	G-MAX AW	G-MAX RS	Grabber A/T Sport	Grabber A/T Sport-W	Grabber A/TX	Grabber APT	Grabber Arctic	Grabber Arctic LT	Grabber HD	Grabber HD Van	Grabber H/T	Grabber HTS	Grabber HTS80	Grabber X3
17	35 X 12.50 R 17 LT									●										●
	205/40 ZR 17				●															
	245/40 ZR 17			●				●												
	255/40 ZR 17							●												
	275/40 ZR 17		●					●												
	205/45 R 17		●																	
	205/45 ZR 17			●																
	215/45 R 17	●	●	●																
	215/45 ZR 17			●				●												
	225/45 R 17	●	●	●																
	225/45 ZR 17			●				●												
	235/45 R 17	●	●	●																
	235/45 ZR 17			●				●												
	245/45 R 17		●																	
	245/45 ZR 17			●				●												
	205/50 R 17	●	●	●																
	205/50 ZR 17			●				●												
	215/50 R 17	●	●	●																
	215/50 ZR 17			●				●												
	225/50 R 17		●					●												
	225/50 ZR 17			●																
	235/50 R 17			●																
	235/50 ZR 17				●															
	245/50 R 17				●															
	245/50 ZR 17					●														
	205/55 R 17	●	●	●																
	205/55 ZR 17			●																
	225/55 R 17	●	●	●																
	225/55 ZR 17			●				●												
	235/55 R 17	●	●	●					●											
	235/55 ZR 17			●				●												
	275/55 R 17			●																
	215/60 R 17	●	●	●																
	225/60 R 17	●	●	●																
	235/60 R 17	●	●	●																
	265/60 R 17				●			●												
	275/60 R 17					●			●									●		
	215/65 R 17	●	●	●																
	225/65 R 17	●	●	●													●			
	235/65 R 17	●	●	●						●									●	
	245/65 R 17													●				●		
	255/65 R 17												●					●		
	265/65 R 17												●					●		
	235/70 R 17												●						●	
	245/70 R 17												●							●

QUICK REFERENCE GUIDE

RIM DIA (IN)	TIRE SIZE	Altimax ³ AW	Altimax Arctic ¹²	Altimax RT ⁴⁵	G-MAX AS ⁰⁷	G-MAX Justice	G-MAX RS	Grabber A/T Sport	Grabber A/T Sport-W	Grabber A/T ^X	Grabber APT	Grabber Arctic	Grabber Arctic LT	Grabber HD	Grabber HD Van	Grabber HT ^T	Grabber HTS	Grabber HTS ⁶⁰	Grabber X ³
17	LT245/70 R 17							●	●		●		●		●				
	P245/70 R 17															●			
	255/70 R 17							●	●							●			
	LT255/70 R 17						●												
	265/70 R 17							●	●	●						●			
	LT265/70 R 17							●	●	●		●	●					●	
	LT275/70 R 17								●										
	LT285/70 R 17								●	●								●	
	LT315/70 R 17									●								●	
	LT245/75 R 17								●	●		●	●			●			
	255/75 R 17									●									
	LT235/80 R 17								●	●				●					
18	33 X 12.50 R 18 LT																	●	
	35 X 12.50 R 18 LT									●								●	
	295/30 ZR 18								●										
	245/35 ZR 18								●										
	255/35 ZR 18						●			●									
	265/35 ZR 18						●			●									
	275/35 ZR 18								●										
	285/35 ZR 18								●										
	215/40 ZR 18						●												
	225/40 R 18	●		●															
	225/40 ZR 18		●							●									
	235/40 ZR 18			●						●									
	245/40 R 18	●		●															
	245/40 ZR 18				●					●									
	255/40 ZR 18				●					●									
	275/40 ZR 18					●				●									
	285/40 ZR 18						●												
	215/45 ZR 18						●												
	225/45 R 18	●	●	●															
	225/45 ZR 18							●			●								
	235/45 R 18	●	●	●															
	235/45 ZR 18							●											
	245/45 R 18	●		●															
	245/45 ZR 18						●			●									
	255/45 ZR 18						●			●									
	225/50 R 18	●	●	●															
	225/50 ZR 18							●											
	235/50 R 18	●		●					●										
	235/50 ZR 18							●	●		●								
	245/50 R 18						●												
	245/50 ZR 18						●												
	215/55 R 18						●												

QUICK REFERENCE GUIDE

RIM DIA (IN)	TIRE SIZE	AltMAX 35 AW	AltMAX Arctic L2	AltMAX RT45	G-MAX AS07	G-MAX Justice	G-MAX AW	G-MAX RS	Grabber A/T Sport	Grabber A/T Sport-W	Grabber A/T X	Grabber APT	Grabber Arctic	Grabber Arctic LT	Grabber HD	Grabber HD Van	Grabber H/T	Grabber HTS	Grabber HTS80	Grabber X3
18	225/55 R 18	●	●	●																
	235/55 R 18	●	●	●																
	235/55 ZR 18				●															
	245/55 R 18	●		●		●	●													
	245/55 ZR 18				●															
	255/55 R 18	●												●					●	
	225/60 R 18	●	●	●				●												
	225/60 ZR 18						●													
	235/60 R 18	●	●	●														●		
	245/60 R 18	●					●						●					●		
	255/60 R 18					●	●													
	265/60 R 18										●	●						●		
	275/60 R 18							●												
	LT285/60 R 18									●										
	235/65 R 18	●		●														●		
	255/65 R 18											●						●		
	265/65 R 18										●	●						●		
	275/65 R 18									●	●	●						●		
	LT275/65 R 18									●	●	●	●				●			
	LT285/65 R 18									●										
	255/70 R 18								●	●	●							●		
	265/70 R 18								●									●	●	
	LT265/70 R 18								●	●	●						●	●		
	275/70 R 18								●											
	LT275/70 R 18								●	●	●	●						●		
	P275/70 R 18								●											
19	295/30 ZR 19							●												
	305/30 ZR 19								●											
	235/35 ZR 19								●											
	245/35 ZR 19							●												
	255/35 ZR 19							●												
	265/35 ZR 19								●											
	275/35 ZR 19							●												
	285/35 ZR 19							●												
	225/40 ZR 19							●			●									
	235/40 R 19							●												
	235/40 ZR 19							●												
	245/40 R 19							●												
	245/40 ZR 19							●			●									
	255/40 ZR 19							●			●									
	275/40 ZR 19							●												
	225/45 ZR 19							●												
	235/45 R 19							●												
	245/45 R 19	●		●																

QUICK REFERENCE GUIDE

RIM DIA (IN)	TIRE SIZE	Altimax ³ 65 AW	Altimax Arctic ¹²	Altimax RT45	G-MAX AS ⁰⁷	G-MAX Justice	G-MAX Justice AW	G-MAX RS	Grabber A/T Sport	Grabber A/T Sport-W	Grabber A/T ^{1X}	Grabber APT	Grabber Arctic	Grabber Arctic LT	Grabber HD	Grabber HD Van	Grabber H/T	Grabber HTS	Grabber HTS ⁶⁰	Grabber X ³
19	245/45 ZR 19				●			●												
	255/45 R 19			●																
	235/50 R 19		●																	
	245/50 ZR 19			●																
	255/50 R 19	●																	●	
	225/55 R 19	●	●	●														●		
	235/55 R 19	●		●													●			
	235/55 ZR 19			●																
	245/55 R 19	●		●													●			
	255/60 R 19																●			
20	33 X 12.50 R 20 LT														●					●
	35 X 12.50 R 20 LT														●					●
	37 X 13.50 R 20 LT														●					
	245/35 ZR 20			●																
	255/35 ZR 20			●																
	275/35 ZR 20			●				●												
	285/35 ZR 20			●				●												
	305/35 ZR 20			●				●												
	245/40 R 20		●																	
	245/40 ZR 20		●					●												
	275/40 ZR 20		●					●												
	245/45 R 20		●																	
	245/45 ZR 20		●					●												
	255/45 ZR 20		●																	
	265/45 R 20		●																	
	275/45 R 20		●														●			
	295/45 R 20		●																	
	245/50 R 20	●		●															●	
	255/50 R 20																●			
	265/50 R 20		●								●						●			
	275/50 R 20																	●		
	305/50 R 20		●								●									
	235/55 R 20	●		●														●		
	255/55 R 20																●			
	275/55 R 20		●	●	●					●	●	●					●			
	LT275/55 R 20									●										
	LT285/55 R 20									●										
	LT305/55 R 20									●										
	245/60 R 20																●			
	LT265/60 R 20									●								●		
	275/60 R 20									●	●	●					●			
	LT275/60 R 20									●									●	
	LT285/60 R 20									●										

QUICK REFERENCE GUIDE

RIM DIA (IN)	TIRE SIZE	Altimax 35 AW	Altimax Arctic-12	Altimax RT45	G-MAX AS07	G-MAX Justice	G-MAX Justice AW	G-MAX RS	Grabber A/T Sport	Grabber A/T Sport-W	Grabber A/TX	Grabber APT	Grabber Arctic	Grabber Arctic LT	Grabber HD	Grabber HD Van	Grabber H/T	Grabber HTS	Grabber HTS80	Grabber X3
20	LT325/60 R 20									●										
	LT275/65 R 20									●			●				●			
22	33 X 12.50 R 22 LT									●										
	35 X 12.50 R 22 LT									●										
	37 X 12.50 R 22 LT									●										
	265/40 ZR 22		●																	
	305/40 R 22		●																	
	285/45 R 22		●								●					●		●		
23	305/45 R 22		●								●									
24	275/50 R 22															●		●		
	305/40 R 23	●																		
	305/35 R 24			●																

GENERAL TIRE 

DELIVERS

GENERAL TIRE 

DELIVERS

for handling your everyday.

Our **ultra-high performance** products deliver superior handling in a variety of weather conditions with long-lasting treadwear.



G-MAX RS



G-MAX AS⁰⁷





PASSENGER & CROSSOVER | SUMMER | ULTRA-HIGH PERFORMANCE

G-MAX RS

Rim Diameter



16" - 20"

Aspect Ratio



30 - 55

Tread Pattern



Directional



Replacement Tire Monitor

Letters in the tread wear off to read "REPLACE TIRE" when the tire wears to 2/32 of tread depth, indicating a tire change is needed.

Sample Vehicle Fitments Include:

- Audi: A4, A6 & TT
- BMW: 1-5 Series
- Chevrolet Camaro
- Dodge: Challenger & Charger
- Ford Mustang
- Mazda Miata
- Mercedes-Benz: C & E-Class
- Mini Cooper
- Nissan 370Z

- OEM Vehicle Fitment for Saleen Mustang

Benefits

- Best-in-class dry and wet handling*
- Best-in-class wet braking*
- Best-in-class treadwear*
- Preferred tire of Petty's Garage



CUSTOMER SATISFACTION TRIAL

Or the first 2/32^{nds} of tread. See warranty manual for complete details.

*Based on internal test results compared to Firestone Firehawk Indy 500, BF Goodrich g-Force Sport Comp2 and Hankook Ventus V12 evo2 in the size 245/40ZR18. On road results may vary.

G-MAX RS | Product Data

PASSENGER & CROSSOVER | SUMMER | ULTRA-HIGH PERFORMANCE

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
16	50	225/50 ZR 16	92 W	SL	BSW	15492580000	Yes	24.9	21.5	51.0	9.2 (7.0)	(6.0 - 8.0)	1389	10	836
	50	245/50 ZR 16	97 W	SL	BSW	15492600000	Yes	25.6	24.5	51.0	10.0 (7.5)	(7.0 - 8.5)	1609	10	810
	55	205/55 ZR 16	91 W	SL	BSW	15492560000	Yes	24.9	21.2	51.0	8.4 (6.5)	(5.5 - 7.5)	1356	10	835
17	40	245/40 ZR 17	91 W	SL	BSW	15492690000	Yes	24.7	22.9	51.0	9.8 (8.5)	(8.0 - 9.5)	1356	10	840
	40	255/40 ZR 17	94 W	SL	BSW	15492710000	Yes	25.0	24.1	51.0	10.2 (9.0)	(8.5 - 10.0)	1477	10	830
	40	275/40 ZR 17	98 W	SL	BSW	15492720000	Yes	25.7	24.1	51.0	10.9 (9.5)	(9.0 - 11.0)	1653	10	810
	45	215/45 ZR 17	91 W	XL	BSW	15492630000	Yes	24.6	20.3	51.0	8.4 (7.0)	(7.0 - 8.0)	1356	10	844
	45	225/45 ZR 17	91 W	SL	BSW	15492650000	Yes	25.0	20.4	51.0	8.9 (7.5)	(7.0 - 8.5)	1356	10	832
	45	235/45 ZR 17	94 W	SL	BSW	15492670000	Yes	25.3	22.1	51.0	9.3 (8.0)	(7.5 - 9.0)	1477	10	820
	45	245/45 ZR 17	99 Y	XL	BSW	15492700000	Yes	25.7	24.5	51.0	9.6 (8.0)	(7.5 - 9.0)	1709	10	809
	50	205/50 ZR 17	93 W	XL	BSW	15492620000	Yes	25.1	20.9	51.0	8.4 (6.5)	(5.5 - 7.5)	1433	10	829
	50	215/50 ZR 17	95 W	XL	BSW	15492640000	Yes	25.5	23.1	51.0	8.9 (7.0)	(6.0 - 7.5)	1521	10	816
18	50	225/50 ZR 17	94 W	SL	BSW	15492660000	Yes	25.9	22.4	51.0	9.2 (7.0)	(6.0 - 8.0)	1477	10	803
	30	295/30 ZR 18	98 Y	XL	BSW	15492930000	Yes	25.0	25.2	51.0	11.9 (10.5)	(10.0 - 11.0)	1653	10	832
	35	245/35 ZR 18	92 Y	XL	BSW	15492800000	Yes	24.8	21.6	51.0	9.8 (8.5)	(8.0 - 9.5)	1389	10	839
	35	255/35 ZR 18	94 Y	XL	BSW	15492830000	Yes	25.0	22.9	51.0	10.2 (9.0)	(8.5 - 10.0)	1477	10	830
	35	265/35 ZR 18	97 Y	XL	BSW	15492870000	Yes	25.3	24.2	51.0	10.7 (9.5)	(9.0 - 10.5)	1609	10	821
	35	275/35 ZR 18	95 Y	SL	BSW	15492880000	Yes	25.6	25.4	51.0	10.9 (9.5)	(9.0 - 11.0)	1521	10	812
	35	285/35 ZR 18	101 Y	XL	BSW	15492920000	Yes	25.9	27.8	51.0	11.4 (10.0)	(9.5 - 11.0)	1819	10	803
	40	225/40 ZR 18	92 Y	XL	BSW	15492750000	Yes	25.1	21.0	51.0	9.1 (8.0)	(7.5 - 9.0)	1389	10	828
	40	235/40 ZR 18	95 Y	XL	BSW	15492770000	Yes	25.4	22.2	51.0	9.5 (8.5)	(8.0 - 9.5)	1521	10	818
	40	245/40 ZR 18	97 Y	XL	BSW	15492810000	Yes	25.7	25.8	51.0	9.8 (8.5)	(8.0 - 9.5)	1609	10	808
	40	255/40 ZR 18	99 Y	XL	BSW	15492840000	Yes	26.0	25.2	51.0	10.2 (9.0)	(8.5 - 10.0)	1709	10	798
	40	275/40 ZR 18	99 Y	SL	BSW	15492890000	Yes	26.7	27.0	51.0	10.9 (9.5)	(9.0 - 11.0)	1709	10	779
	40	285/40 ZR 18	101 Y	SL	BSW	15592020000	Yes	27.0	27.8	51.0	11.4 (10.0)	(9.5 - 11.0)	1819	10	770
	45	225/45 ZR 18	91 Y	SL	BSW	15492760000	Yes	26.0	22.2	51.0	8.9 (7.5)	(7.0 - 8.5)	1356	10	800
	45	245/45 ZR 18	100 Y	XL	BSW	15492820000	Yes	26.7	24.3	51.0	9.6 (8.0)	(7.5 - 9.0)	1764	10	779
	45	255/45 ZR 18	103 Y	XL	BSW	15492860000	Yes	27.0	28.0	51.0	10.0 (8.5)	(8.0 - 9.5)	1929	10	768
19	50	235/50 ZR 18	97 Y	SL	BSW	15492780000	Yes	27.3	25.8	51.0	9.6 (7.5)	(6.5 - 8.5)	1609	10	762
	30	295/30 ZR 19	100 Y	XL	BSW	15494490000	Yes	26.0	27.4	51.0	11.9 (10.5)	(10.0 - 11.0)	1764	10	800
	30	305/30 ZR 19	102 Y	XL	BSW	15494500000	Yes	26.2	27.5	51.0	12.3 (11.0)	(10.5 - 11.5)	1874	10	793
	35	235/35 ZR 19	91 Y	XL	BSW	15492980000	Yes	25.5	22.1	51.0	9.5 (8.5)	(8.0 - 9.5)	1356	10	815
	35	245/35 ZR 19	93 Y	XL	BSW	15492990000	Yes	25.8	22.5	51.0	9.8 (8.5)	(8.0 - 9.5)	1433	10	807
	35	255/35 ZR 19	96 Y	XL	BSW	15494270000	Yes	26.0	24.2	51.0	10.2 (9.0)	(8.5 - 10.0)	1565	10	798
	35	265/35 ZR 19	98 Y	XL	BSW	15494360000	Yes	26.3	25.3	51.0	10.7 (9.5)	(9.0 - 10.5)	1653	10	790
	35	275/35 ZR 19	100 Y	XL	BSW	15494440000	Yes	26.6	27.9	51.0	10.9 (9.5)	(9.0 - 11.0)	1764	10	782
	35	285/35 ZR 19	99 Y	SL	BSW	15494480000	Yes	26.9	27.4	51.0	11.4 (10.0)	(9.5 - 11.0)	1709	10	774
	40	225/40 ZR 19	93 Y	XL	BSW	15492940000	Yes	26.1	21.1	51.0	9.1 (8.0)	(7.5 - 9.0)	1433	10	796
	40	245/40 ZR 19	98 Y	XL	BSW	15493010000	Yes	26.7	25.1	51.0	9.8 (8.5)	(8.0 - 9.5)	1653	10	778
	40	255/40 ZR 19	100 Y	XL	BSW	15494300000	Yes	27.0	25.5	51.0	10.2 (9.0)	(8.5 - 10.0)	1764	10	769
	45	245/45 ZR 19	102 Y	XL	BSW	15494240000	Yes	27.7	26.2	51.0	9.6 (8.0)	(7.5 - 9.0)	1874	10	750

BSW = Black Sidewall



G-MAX RS

| Product Data

PASSENGER & CROSSOVER | SUMMER | ULTRA-HIGH PERFORMANCE

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
20	35	275/35 ZR 20	102 Y	XL	BSW	15494570000	Yes	27.6	27.2	51.0	10.9 (9.5)	(9.0 - 11.0)	1874	10	753
	35	285/35 ZR 20	100 Y	SL	BSW	15501340000	Yes	27.9	28.7	51.0	11.4 (10.0)	(9.5 - 11.0)	1764	10	746
	35	305/35 ZR 20	104 Y	SL	BSW	15501350000	Yes	28.4	32.8	51.0	12.3 (11.0)	(10.0 - 12.0)	1984	10	731
	40	245/40 ZR 20	99 Y	XL	BSW	15494510000	Yes	27.7	27.7	51.0	9.8 (8.5)	(8.0 - 9.5)	1709	10	750
	40	275/40 ZR 20	106 Y	XL	BSW	15494590000	Yes	28.7	29.7	51.0	10.9 (9.5)	(9.0 - 11.0)	2094	10	725
	45	245/45 ZR 20	103 Y	XL	BSW	15494540000	Yes	28.7	26.9	51.0	9.6 (8.0)	(7.5 - 9.0)	1929	10	724

BSW = Black Sidewall

GENERAL TIRE 

DELIVERS



PASSENGER, CROSSOVER & LT/SUV | ALL-SEASON | ULTRA-HIGH PERFORMANCE


G-MAX AS⁰⁷




TREADWEAR	TRACTION	TEMPERATURE	SPEED	WARRANTY
500 (LI ≤ 103)	AA	A	V & W	50,000 Miles
500 (LI ≥ 104)	A	A	V & W	50,000 Miles

Benefits

- Replaces existing G-MAX AS⁰⁵ and Grabber UHP, combining them into one powerline
- Best-in-class wet and dry braking*
- Best-in-class snow traction*
- Low road noise
- Long-lasting treadwear



Replacement Tire Monitor
Letters in the tread wear off to read "REPLACE TIRE" when the tire wears to 2/32 of tread depth, indicating a tire change is needed.



Visual Alignment Indicators
Indicators in both sides of the tread wear off evenly, ensuring the driver of proper alignment, or wear off unevenly, alerting the driver to check the wheel alignment.

Sample Vehicle Fitments Include:

- Audi A4
- BMW: 3 & 5 Series
- Chevrolet: Camaro & Tahoe
- Dodge: Challenger, Charger & Durango
- Ford: Mustang
- Jeep Grand Cherokee
- Mazda Miata MX5
- Mini Cooper
- Porsche: Macan & Cayenne
- Subaru BRZ
- Plus-size Sport Truck Fitments



CUSTOMER SATISFACTION TRIAL

Or the first 2/32^{nds} of tread. See warranty manual for complete details.

* Based on internal testing of G-MAX AS-07 versus BFGoodrich g-Force COMP-2 A/S Plus, Hankook Ventus S1 AS, Cooper Zeon RS3-G1, Goodyear Eagle Sport All Season, and Falken Azenis FK460 A/S in size 235/50 ZR18.

G-MAX AS⁰⁷ | Product Data

PASSENGER, CROSSOVER & LT/SUV | ALL-SEASON | ULTRA-HIGH PERFORMANCE

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
16	45	205/45 ZR 16	83 W	XL	BSW	15579520000	Yes	23.3	18.6	51.0	8.1 (7.0)	(6.5 - 7.5)	1074	10	893
	50	195/50 ZR 16	84 W	SL	BSW	15579510000	Yes	23.7	18.8	51.0	7.9 (6.0)	(5.5 - 7.0)	1102	10	877
	50	205/50 ZR 16	87 W	SL	BSW	15579530000	Yes	24.1	19.2	51.0	8.4 (6.5)	(5.5 - 7.5)	1201	10	863
	50	225/50 ZR 16	92 W	SL	BSW	15579560000	Yes	24.9	22.7	51.0	9.2 (7.0)	(6.0 - 8.0)	1389	10	836
	55	205/55 ZR 16	91 W	SL	BSW	15579540000	Yes	24.9	20.6	51.0	8.4 (6.5)	(5.5 - 7.5)	1356	10	835
	55	215/55 ZR 16	93 W	SL	BSW	15579550000	Yes	25.3	21.9	51.0	8.9 (7.0)	(6.0 - 7.5)	1433	10	821
	55	225/55 ZR 16	95 W	SL	BSW	15579570000	Yes	25.7	23.7	51.0	9.2 (7.0)	(6.0 - 8.0)	1521	10	807
17	40	205/40 ZR 17	84 W	XL	BSW	15579580000	Yes	23.5	17.2	51.0	8.3 (7.5)	(7.0 - 8.0)	1102	10	886
	40	245/40 ZR 17	91 W	SL	BSW	15579700000	Yes	24.7	23.3	51.0	9.8 (8.5)	(8.0 - 9.5)	1356	10	840
	40	275/40 ZR 17	98 W	SL	BSW	15579730000	Yes	25.7	26.0	51.0	10.9 (9.5)	(9.0 - 11.0)	1653	10	810
	45	205/45 ZR 17	88 W	XL	BSW	15579590000	Yes	24.3	19.7	51.0	8.1 (7.0)	(6.5 - 7.5)	1235	10	856
	45	215/45 ZR 17	91 W	XL	BSW	15579610000	Yes	24.6	21.8	51.0	8.4 (7.0)	(7.0 - 8.0)	1356	10	844
	45	225/45 ZR 17	91 W	SL	BSW	15579640000	Yes	25.0	22.2	51.0	8.9 (7.5)	(7.0 - 8.5)	1356	10	832
	45	235/45 ZR 17	94 W	SL	BSW	15579670000	Yes	25.3	23.8	51.0	9.3 (8.0)	(7.5 - 9.0)	1477	10	820
	45	245/45 ZR 17	99 W	XL	BSW	15579710000	Yes	25.7	24.8	51.0	9.6 (8.0)	(7.5 - 9.0)	1709	10	809
	50	205/50 ZR 17	93 W	XL	BSW	15579600000	Yes	25.1	20.4	51.0	8.4 (6.5)	(5.5 - 7.5)	1433	10	829
	50	215/50 ZR 17	95 W	XL	BSW	15579620000	Yes	25.5	21.9	51.0	8.9 (7.0)	(6.0 - 7.5)	1521	10	816
	50	225/50 ZR 17	94 W	SL	BSW	15579650000	Yes	25.9	23.0	51.0	9.2 (7.0)	(6.0 - 8.0)	1477	10	803
	50	235/50 ZR 17	96 W	SL	BSW	15579680000	Yes	26.3	25.5	51.0	9.6 (7.5)	(6.5 - 8.5)	1565	10	791
	50	245/50 ZR 17	99 W	SL	BSW	15579720000	Yes	26.6	25.7	51.0	10.0 (7.5)	(7.0 - 8.5)	1709	10	780
	55	215/55 ZR 17	94 W	SL	BSW	15579630000	Yes	26.3	22.3	51.0	8.9 (7.0)	(6.0 - 7.5)	1477	10	790
	55	225/55 ZR 17	97 W	SL	BSW	15579660000	Yes	26.7	24.8	51.0	9.2 (7.0)	(6.0 - 8.0)	1609	10	777
	55	235/55 ZR 17	99 W	SL	BSW	15579690000	Yes	27.2	26.5	51.0	9.6 (7.5)	(6.5 - 8.5)	1709	10	764
	55	275/55 R 17	109 V	SL	BSW	15579740000	Yes	28.9	33.9	51.0	11.2 (8.5)	(7.5 - 9.5)	2271	11	719
18	35	255/35 ZR 18	94 W	XL	BSW	15579880000	Yes	25.0	23.4	51.0	10.2 (9.0)	(8.5 - 10.0)	1477	10	830
	35	265/35 ZR 18	97 W	XL	BSW	15579910000	Yes	25.3	24.9	51.0	10.7 (9.5)	(9.0 - 10.5)	1609	10	821
	40	215/40 ZR 18	89 W	XL	BSW	15579750000	Yes	24.8	20.2	51.0	8.6 (7.5)	(7.0 - 8.5)	1279	10	839
	40	225/40 ZR 18	92 W	XL	BSW	15579770000	Yes	25.1	21.7	51.0	9.1 (8.0)	(7.5 - 9.0)	1389	10	828
	40	235/40 ZR 18	95 W	XL	BSW	15579800000	Yes	25.4	22.8	51.0	9.5 (8.5)	(8.0 - 9.5)	1521	10	818
	40	245/40 ZR 18	97 W	XL	BSW	15579840000	Yes	25.7	24.0	51.0	9.8 (8.5)	(8.0 - 9.5)	1609	10	808
	40	255/40 ZR 18	99 W	XL	BSW	15579890000	Yes	26.0	26.1	51.0	10.2 (9.0)	(8.5 - 10.0)	1709	10	798
	40	275/40 ZR 18	99 W	SL	BSW	15579920000	Yes	26.7	27.4	51.0	10.9 (9.5)	(9.0 - 11.0)	1709	10	779
	45	215/45 ZR 18	93 W	XL	BSW	15579760000	Yes	25.6	22.5	51.0	8.4 (7.0)	(7.0 - 8.0)	1433	10	811
	45	225/45 ZR 18	95 W	XL	BSW	15579780000	Yes	26.0	24.2	51.0	8.9 (7.5)	(7.0 - 8.5)	1521	10	800
	45	235/45 ZR 18	98 W	XL	BSW	15579810000	Yes	26.3	24.5	51.0	9.3 (8.0)	(7.5 - 9.0)	1653	10	789
	45	245/45 ZR 18	100 W	XL	BSW	15579850000	Yes	26.7	25.5	51.0	9.6 (8.0)	(7.5 - 9.0)	1764	10	779
	45	255/45 ZR 18	103 W	XL	BSW	15579900000	Yes	27.0	26.9	51.0	10.0 (8.5)	(8.0 - 9.5)	1929	10	768
	50	225/50 ZR 18	95 W	SL	BSW	15579790000	Yes	26.9	24.4	51.0	9.2 (7.0)	(6.0 - 8.0)	1521	10	773
	50	235/50 ZR 18	97 W	SL	BSW	15579820000	Yes	27.3	25.9	51.0	9.6 (7.5)	(6.5 - 8.5)	1609	10	762
	50	245/50 ZR 18	100 W	SL	BSW	15579860000	Yes	27.6	28.3	51.0	10.0 (7.5)	(7.0 - 8.5)	1764	10	751
	55	235/55 ZR 18	100 W	SL	BSW	15579830000	Yes	28.2	28.0	51.0	9.6 (7.5)	(6.5 - 8.5)	1764	10	737

BSW = Black Sidewall



G-MAX AS⁰⁷

| Product Data

PASSENGER, CROSSOVER & LT/SUV | ALL-SEASON | ULTRA-HIGH PERFORMANCE

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32 ND S)	REVS PER MILE
18	55	245/55 ZR 18	103 W	SL	BSW	15579870000	Yes	28.6	29.5	51.0	10.0 (7.5)	(7.0 - 8.5)	1929	10	726
	35	245/35 ZR 19	93 W	XL	BSW	15579970000	Yes	25.8	22.8	51.0	9.8 (8.5)	(8.0 - 9.5)	1433	10	807
	35	255/35 ZR 19	96 W	XL	BSW	15570030000	Yes	26.0	24.7	51.0	10.2 (9.0)	(8.5 - 10.0)	1565	10	798
	35	275/35 ZR 19	100 W	XL	BSW	15570100000	Yes	26.6	26.9	51.0	10.9 (9.5)	(9.0 - 11.0)	1764	10	782
	35	285/35 ZR 19	103 W	XL	BSW	15570120000	Yes	26.9	26.7	51.0	11.4 (10.0)	(9.5 - 11.0)	1929	10	774
	40	225/40 ZR 19	93 W	XL	BSW	15579930000	Yes	26.1	23.4	51.0	9.1 (8.0)	(7.5 - 9.0)	1433	10	796
	40	235/40 ZR 19	96 W	XL	BSW	15579950000	Yes	26.4	24.5	51.0	9.5 (8.5)	(8.0 - 9.5)	1565	10	787
	40	245/40 ZR 19	98 W	XL	BSW	15579980000	Yes	26.7	25.7	51.0	9.8 (8.5)	(8.0 - 9.5)	1653	10	778
	40	255/40 ZR 19	100 W	XL	BSW	15570080000	Yes	27.0	27.4	51.0	10.2 (9.0)	(8.5 - 10.0)	1764	10	769
	40	275/40 ZR 19	105 W	XL	BSW	15570110000	Yes	27.7	28.9	51.0	10.9 (9.5)	(9.0 - 11.0)	2039	10	751
	45	225/45 ZR 19	92 W	SL	BSW	15579940000	Yes	27.0	24.9	51.0	8.9 (7.5)	(7.0 - 8.5)	1389	10	770
	45	245/45 ZR 19	102 W	XL	BSW	15579990000	Yes	27.7	26.6	51.0	9.6 (8.0)	(7.5 - 9.0)	1874	10	750
	50	245/50 ZR 19	105 W	XL	BSW	15570000000	Yes	28.6	28.7	51.0	10.0 (7.5)	(7.0 - 8.5)	2039	10	725
	50	255/50 ZR 19	107 W	XL	BSW	15570090000	Yes	29.0	31.2	51.0	10.4 (8.0)	(7.0 - 9.0)	2149	10	715
	55	235/55 ZR 19	105 W	XL	BSW	15579960000	Yes	29.2	28.3	51.0	9.6 (7.5)	(6.5 - 8.5)	2039	10	712
19	35	245/35 ZR 20	95 W	XL	BSW	15570130000	Yes	26.8	24.4	51.0	9.8 (8.5)	(8.0 - 9.5)	1521	10	777
	35	255/35 ZR 20	97 W	XL	BSW	15570170000	Yes	27.0	25.1	51.0	10.2 (9.0)	(8.5 - 10.0)	1609	10	769
	35	275/35 ZR 20	102 W	XL	BSW	15570230000	Yes	27.6	28.8	51.0	10.9 (9.5)	(9.0 - 11.0)	1874	10	753
	35	285/35 ZR 20	104 W	XL	BSW	15570270000	Yes	27.9	29.1	51.0	11.4 (10.0)	(9.5 - 11.0)	1984	10	746
	35	305/35 ZR 20	107 W	XL	BSW	15570350000	Yes	28.4	31.1	51.0	12.3 (11.0)	(10.0 - 12.0)	2149	10	731
	40	245/40 ZR 20	99 W	XL	BSW	15570140000	Yes	27.7	27.0	51.0	9.8 (8.5)	(8.0 - 9.5)	1709	10	750
	40	275/40 ZR 20	106 W	XL	BSW	15570240000	Yes	28.7	30.5	51.0	10.9 (9.5)	(9.0 - 11.0)	2094	10	725
	45	245/45 ZR 20	103 W	XL	BSW	15570150000	Yes	28.7	28.4	51.0	9.6 (8.0)	(7.5 - 9.0)	1929	10	724
	45	255/45 ZR 20	105 W	XL	BSW	15570180000	Yes	29.0	29.5	51.0	10.0 (8.5)	(8.0 - 9.5)	2039	10	715
	45	265/45 R 20	108 V	XL	BSW	15570210000	Yes	29.4	30.3	51.0	10.5 (9.0)	(8.5 - 10.0)	2205	11	707
	45	275/45 R 20	110 V	XL	BSW	15570250000	Yes	29.7	33.7	51.0	10.7 (9.0)	(8.5 - 10.5)	2337	11	698
	45	295/45 R 20	114 V	XL	BSW	15570340000	Yes	30.5	35.8	51.0	11.7 (10.0)	(9.5 - 11.0)	2601	11	682
	50	265/50 R 20	111 V	XL	BSW	15570220000	Yes	30.4	35.9	51.0	10.9 (8.5)	(7.5 - 9.5)	2403	11	683
	50	305/50 R 20	120 V	XL	BSW	15570420000	Yes	32.0	42.3	51.0	12.4 (9.5)	(8.5 - 11.0)	3086	11	649
	55	275/55 R 20	117 V	XL	BSW	15570260000	Yes	31.9	38.1	51.0	11.2 (8.5)	(7.5 - 9.5)	2833	11	651
20	40	265/40 ZR 22	106 W	XL	BSW	15570450000	Yes	30.3	32.5	51.0	10.7 (9.5)	(9.0 - 10.5)	2094	10	685
	40	305/40 R 22	114 V	XL	BSW	15570660000	Yes	31.6	22.3	51.0	12.3 (11.0)	(10.0 - 12.0)	2601	11	657
	45	285/45 R 22	114 V	XL	BSW	15570580000	Yes	32.1	37.1	51.0	11.2 (9.5)	(9.0 - 10.5)	2601	11	647
	45	305/45 R 22	118 V	XL	BSW	15570680000	Yes	32.8	41.1	51.0	11.9 (10.0)	(9.5 - 11.5)	2910	11	633
23	40	305/40 R 23	115 V	XL	BSW	15570700000	Yes	32.6	39.0	51.0	12.3 (11.0)	(10.0 - 12.0)	2679	11	637
24	35	305/35 R 24	112 V	XL	BSW	15570710000	Yes	32.4	38.3	51.0	12.3 (11.0)	(10.0 - 12.0)	2469	11	641

BSW = Black Sidewall

GENERAL TIRE 

DELIVERS

GENERAL TIRE 

DELIVERS

for excelling year-round.

Our **touring** products are developed to provide confidence in all driving conditions year-round.



AltiMAX RT⁴⁵



AltiMAX 365 AW



Grabber H/T





PASSENGER & CROSSOVER | ALL-SEASON | TOURING

AltiMAX RT⁴⁵

Rim Diameter



14" - 20"

Aspect Ratio



40 - 70


Tread Pattern



Symmetric



Replacement Tire Monitor
Letters in the tread wear off to read "REPLACE TIRE" when the tire wears to 2/32 of tread depth, indicating a tire change is needed.



Visual Alignment Indicators
Indicators in both sides of the tread wear off evenly, ensuring the driver of proper alignment, or wear off unevenly, alerting the driver to check the wheel alignment.

TREADWEAR	TRACTION	TEMPERATURE	SPEED	WARRANTY
600	A	B	T	75,000 Miles (14" - 15")
600	A	A	H	75,000 Miles (14" - 15")
600	A	A	V	65,000 Miles (14" - 15")
700	A	B	T	75,000 Miles (16" - 20")
700	A	A	H	75,000 Miles (16" - 20")
700	A	A	V	65,000 Miles (16" - 20")

Benefits

- Expansive size lineup with 136 sizes, covering more than 85% of the segment
- Reliable braking on wet roads
- Responsive handling on wet and dry roads
- Optimal traction in light snow
- Low road noise
- Long-lasting treadwear

Sample Vehicle Fitments Include:

- Chevrolet: Bolt EV, Malibu
- Dodge: Grand Caravan, Journey
- Ford: Edge, Focus
- Honda: Accord, Civic, Odyssey
- Jeep Compass
- Kia: Carnival, Optima, Soul
- Mazda CRX 5
- Nissan: Murano, Sentra
- Subaru Outback
- Toyota: Camry, Sienna



CUSTOMER SATISFACTION TRIAL

Or the first 2/32^{nds} of tread. See warranty manual for complete details.

Altimax RT⁴⁵ | Product Data

PASSENGER & CROSSOVER | ALL-SEASON | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
14	60	185/60 R 14	82 H	SL	BSW	15576020000	No	22.7	14.4	51.0	7.4 (5.5)	(5.0 - 6.5)	1047	11	914
	60	195/60 R 14	86 H	SL	BSW	15577250000	No	23.2	16.0	51.0	7.9 (6.0)	(5.5 - 7.0)	1168	11	895
	65	175/65 R 14	82 T	SL	BSW	15575970000	No	23.0	14.3	44.0	7.0 (5.0)	(5.0 - 6.0)	1047	11	905
	65	185/65 R 14	86 H	SL	BSW	15576060000	No	23.5	15.1	51.0	7.4 (5.5)	(5.0 - 6.5)	1168	11	885
	65	185/65 R 14	86 T	SL	BSW	15576050000	No	23.5	14.9	44.0	7.4 (5.5)	(5.0 - 6.5)	1168	11	885
	70	175/70 R 14	84 T	SL	BSW	15575990000	No	23.6	14.3	44.0	7.0 (5.0)	(4.5 - 6.0)	1102	11	879
	70	185/70 R 14	88 T	SL	BSW	15576100000	No	24.2	15.6	44.0	7.4 (5.5)	(4.5 - 6.0)	1235	11	859
	70	195/70 R 14	91 T	SL	BSW	15577260000	No	24.7	17.3	44.0	7.9 (6.0)	(5.0 - 6.5)	1356	11	839
	70	205/70 R 14	98 T	XL	BSW	15577330000	No	25.3	19.6	51.0	8.2 (6.0)	(5.0 - 7.0)	1653	11	821
	70	215/70 R 14	96 T	SL	BSW	15577410000	No	25.9	20.5	44.0	8.7 (6.5)	(5.5 - 7.0)	1565	11	804
	70	225/70 R 14	99 T	SL	OWL	15576530000	No	26.4	23.2	44.0	9.0 (6.5)	(6.0 - 7.5)	1709	11	787
	55	185/55 R 15	82 H	SL	BSW	15576000000	Yes	23.0	15.9	51.0	7.6 (6.0)	(5.0 - 6.5)	1047	11	903
	55	185/55 R 15	82 V	SL	BSW	15577190000	Yes	23.0	15.6	51.0	7.6 (6.0)	(5.0 - 6.5)	1047	11	903
15	55	195/55 R 15	85 V	SL	BSW	15577230000	Yes	23.4	16.5	51.0	7.9 (6.0)	(5.5 - 7.0)	1135	11	886
	60	185/60 R 15	84 H	SL	BSW	15576040000	No	23.7	16.6	51.0	7.4 (5.5)	(5.0 - 6.5)	1102	11	875
	60	185/60 R 15	84 T	SL	BSW	15576030000	No	23.7	16.6	44.0	7.4 (5.5)	(5.0 - 6.5)	1102	11	875
	60	195/60 R 15	88 H	SL	BSW	15576130000	No	24.2	17.0	51.0	7.9 (6.0)	(5.5 - 7.0)	1235	11	858
	60	195/60 R 15	88 T	SL	BSW	15576120000	No	24.2	17.0	44.0	7.9 (6.0)	(5.5 - 7.0)	1235	11	858
	60	205/60 R 15	91 H	SL	BSW	15577310000	No	24.7	18.7	51.0	8.2 (6.0)	(5.5 - 7.5)	1356	11	842
	60	215/60 R 15	94 T	SL	BSW	15577380000	No	25.2	19.4	44.0	8.7 (6.5)	(6.0 - 7.5)	1477	11	826
	60	225/60 R 15	96 H	SL	BSW	15577480000	No	25.6	21.8	51.0	9.0 (6.5)	(6.0 - 8.0)	1565	11	811
	65	175/65 R 15	84 H	SL	BSW	15575980000	No	24.0	14.7	51.0	7.0 (5.0)	(5.0 - 6.0)	1102	11	867
	65	185/65 R 15	88 H	SL	BSW	15576090000	No	24.5	15.9	51.0	7.4 (5.5)	(5.0 - 6.5)	1235	11	849
	65	185/65 R 15	88 T	SL	BSW	15576070000	No	24.5	15.9	44.0	7.4 (5.5)	(5.0 - 6.5)	1235	11	849
	65	195/65 R 15	91 H	SL	BSW	15576150000	No	25.0	17.1	51.0	7.9 (6.0)	(5.5 - 7.0)	1356	11	832
	65	195/65 R 15	91 T	SL	BSW	15576140000	No	25.0	17.1	44.0	7.9 (6.0)	(5.5 - 7.0)	1356	11	832
	65	205/65 R 15	94 H	SL	BSW	15576210000	No	25.5	18.7	51.0	8.2 (6.0)	(5.5 - 7.5)	1477	11	815
	65	205/65 R 15	99 T	XL	BSW	15576200000	No	25.5	19.8	51.0	8.2 (6.0)	(5.5 - 7.5)	1709	11	815
	65	215/65 R 15	96 T	SL	BSW	15577400000	No	26.0	20.9	44.0	8.7 (6.5)	(6.0 - 7.5)	1565	11	799
16	70	205/70 R 15	96 T	SL	BSW	15576240000	No	26.3	20.7	44.0	8.2 (6.0)	(5.0 - 7.0)	1565	11	790
	70	215/70 R 15	98 T	SL	BSW	15576350000	No	26.9	23.2	44.0	8.7 (6.5)	(5.5 - 7.0)	1653	11	774
	70	225/70 R 15	100 T	SL	OWL	155766540000	No	27.4	26.0	44.0	9.0 (6.5)	(6.0 - 7.5)	1764	11	758
	70	235/70 R 15	103 T	SL	OWL	15576670000	No	28.0	26.8	44.0	9.4 (7.0)	(6.0 - 8.0)	1929	11	743
	50	195/50 R 16	84 H	SL	BSW	15576110000	Yes	23.7	16.8	51.0	7.9 (6.0)	(5.5 - 7.0)	1102	11	877
	50	195/50 R 16	84 V	SL	BSW	15577650000	Yes	23.7	16.7	51.0	7.9 (6.0)	(5.5 - 7.0)	1102	11	877
	50	205/50 R 16	87 H	SL	BSW	15577280000	Yes	24.1	19.1	51.0	8.4 (6.5)	(5.5 - 7.5)	1201	11	863
16	55	185/55 R 16	87 H	XL	BSW	15576010000	Yes	24.0	17.5	51.0	7.6 (6.0)	(5.0 - 6.5)	1201	11	865
	55	195/55 R 16	87 V	SL	BSW	15577240000	Yes	24.4	17.4	51.0	7.9 (6.0)	(5.5 - 7.0)	1201	11	850
	55	205/55 R 16	91 H	SL	BSW	15576170000	Yes	24.9	21.2	51.0	8.4 (6.5)	(5.5 - 7.5)	1356	11	835
	55	205/55 R 16	91 T	SL	BSW	15576160000	Yes	24.9	21.2	44.0	8.4 (6.5)	(5.5 - 7.5)	1356	11	835
	55	205/55 R 16	91 V	SL	BSW	15577300000	Yes	24.9	19.9	51.0	8.4 (6.5)	(5.5 - 7.5)	1356	11	835

BSW = Black Sidewall | OWL = Outlined White Letter



ALTIMAX RT⁴⁵ | Product Data

PASSENGER & CROSSOVER | ALL-SEASON | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32 ND S)	REVS PER MILE
16	55	215/55 R 16	97 H	XL	BSW	15576260000	Yes	25.3	22.3	51.0	8.9 (7.0)	(6.0 - 7.5)	1609	11	821
	55	225/55 R 16	95 H	SL	BSW	15577460000	Yes	25.7	21.1	51.0	9.2 (7.0)	(6.0 - 8.0)	1521	11	807
	60	185/60 R 16	86 H	SL	BSW	15577640000	No	24.7	16.5	51.0	7.4 (5.5)	(5.0 - 6.5)	1168	11	840
	60	205/60 R 16	92 H	SL	BSW	15576190000	No	25.7	18.8	51.0	8.2 (6.0)	(5.5 - 7.5)	1389	11	809
	60	205/60 R 16	92 T	SL	BSW	15576180000	No	25.7	19.2	44.0	8.2 (6.0)	(5.5 - 7.5)	1389	11	809
	60	205/60 R 16	92 V	SL	BSW	15577320000	No	25.7	18.6	51.0	8.2 (6.0)	(5.5 - 7.5)	1389	11	809
	60	215/60 R 16	95 H	SL	BSW	15576300000	No	26.2	21.2	51.0	8.7 (6.5)	(6.0 - 7.5)	1521	11	794
	60	215/60 R 16	95 T	SL	BSW	15576290000	No	26.2	21.1	44.0	8.7 (6.5)	(6.0 - 7.5)	1521	11	794
	60	215/60 R 16	95 V	SL	BSW	15577390000	No	26.2	20.9	51.0	8.7 (6.5)	(6.0 - 7.5)	1521	11	794
	60	225/60 R 16	98 H	SL	BSW	15576450000	No	26.6	22.1	51.0	9.0 (6.5)	(6.0 - 8.0)	1653	11	780
	60	225/60 R 16	98 T	SL	BSW	15576440000	No	26.6	22.1	44.0	9.0 (6.5)	(6.0 - 8.0)	1653	11	780
	60	235/60 R 16	100 H	SL	BSW	15576610000	No	27.1	23.9	51.0	9.4 (7.0)	(6.5 - 8.5)	1764	11	766
	60	235/60 R 16	100 T	SL	BSW	15576600000	No	27.1	23.9	44.0	9.4 (7.0)	(6.5 - 8.5)	1764	11	766
	65	205/65 R 16	95 H	SL	BSW	15576230000	No	26.5	19.7	51.0	8.2 (6.0)	(5.5 - 7.5)	1521	11	784
	65	205/65 R 16	95 T	SL	BSW	15576220000	No	26.5	19.7	44.0	8.2 (6.0)	(5.5 - 7.5)	1521	11	784
	65	215/65 R 16	98 H	SL	BSW	15576330000	No	27.0	21.5	51.0	8.7 (6.5)	(6.0 - 7.5)	1653	11	769
	65	215/65 R 16	98 T	SL	BSW	15576320000	No	27.0	21.1	44.0	8.7 (6.5)	(6.0 - 7.5)	1653	11	769
	65	225/65 R 16	100 H	SL	BSW	15576500000	No	27.5	22.7	51.0	9.0 (6.5)	(6.0 - 8.0)	1764	11	755
	65	225/65 R 16	100 T	SL	BSW	15576490000	No	27.5	22.7	44.0	9.0 (6.5)	(6.0 - 8.0)	1764	11	755
	65	235/65 R 16	103 T	SL	BSW	15576640000	No	28.0	25.4	44.0	9.4 (7.0)	(6.5 - 8.5)	1929	11	741
	70	205/70 R 16	97 T	SL	BSW	15576250000	No	27.3	22.7	44.0	8.2 (6.0)	(5.0 - 7.0)	1609	11	761
	70	215/70 R 16	100 H	SL	BSW	15576360000	No	27.9	24.8	51.0	8.7 (6.5)	(5.5 - 7.0)	1764	11	746
	70	215/70 R 16	100 T	SL	BSW	15577420000	No	27.9	24.8	44.0	8.7 (6.5)	(5.5 - 7.0)	1764	11	746
	70	225/70 R 16	103 T	SL	BSW	15576550000	No	28.4	26.9	44.0	9.0 (6.5)	(6.0 - 7.5)	1929	11	731
17	45	205/45 R 17	88 V	XL	BSW	15577270000	Yes	24.3	17.9	51.0	8.1 (7.0)	(6.5 - 7.5)	1235	11	856
	45	215/45 R 17	91 V	XL	BSW	15577350000	Yes	24.6	20.7	51.0	8.4 (7.0)	(7.0 - 8.0)	1356	11	844
	45	225/45 R 17	91 H	SL	BSW	15576370000	Yes	25.0	22.1	51.0	8.9 (7.5)	(7.0 - 8.5)	1356	11	832
	45	225/45 R 17	94 V	XL	BSW	15577430000	Yes	25.0	20.4	51.0	8.9 (7.5)	(7.0 - 8.5)	1477	11	832
	45	235/45 R 17	97 H	XL	BSW	15577490000	Yes	25.3	24.4	50.0	9.3 (8.0)	(7.5 - 9.0)	1609	11	820
	45	245/45 R 17	99 H	XL	BSW	15577570000	Yes	25.7	22.0	51.0	9.6 (8.0)	(7.5 - 9.0)	1709	11	809
	50	205/50 R 17	93 H	XL	BSW	15577660000	Yes	25.1	21.7	51.0	8.4 (6.5)	(5.5 - 7.5)	1433	11	829
	50	205/50 R 17	93 V	XL	BSW	15577290000	Yes	25.1	21.6	50.0	8.4 (6.5)	(5.5 - 7.5)	1433	11	829
	50	215/50 R 17	95 H	XL	BSW	15577670000	Yes	25.5	21.0	51.0	8.9 (7.0)	(6.0 - 7.5)	1521	11	816
	50	215/50 R 17	95 V	XL	BSW	15577360000	Yes	25.5	20.7	51.0	8.9 (7.0)	(6.0 - 7.5)	1521	11	816
	50	225/50 R 17	98 H	XL	BSW	15577720000	Yes	25.9	23.3	51.0	9.2 (7.0)	(6.0 - 8.0)	1653	11	803
	50	225/50 R 17	98 T	XL	BSW	15576380000	Yes	25.9	23.3	51.0	9.2 (7.0)	(6.0 - 8.0)	1653	11	803
	50	225/50 R 17	98 V	XL	BSW	15577450000	Yes	25.9	23.3	51.0	9.2 (7.0)	(6.0 - 8.0)	1653	11	803
	50	235/50 R 17	96 H	SL	BSW	15577740000	Yes	26.3	24.4	51.0	9.6 (7.5)	(6.5 - 8.5)	1565	11	791
	55	215/55 R 17	94 H	SL	BSW	15577680000	Yes	26.3	23.6	51.0	8.9 (7.0)	(6.0 - 7.5)	1477	11	790
	55	215/55 R 17	94 T	SL	BSW	15576270000	Yes	26.3	23.6	44.0	8.9 (7.0)	(6.0 - 7.5)	1477	11	790
	55	215/55 R 17	94 V	SL	BSW	15577370000	Yes	26.3	20.9	51.0	8.9 (7.0)	(6.0 - 7.5)	1477	11	790
	55	225/55 R 17	97 H	SL	BSW	15576410000	Yes	26.7	24.7	51.0	9.2 (7.0)	(6.0 - 8.0)	1609	11	777
	55	225/55 R 17	97 T	SL	BSW	15576400000	Yes	26.7	24.7	44.0	9.2 (7.0)	(6.0 - 8.0)	1609	11	777
	55	225/55 R 17	97 V	SL	BSW	15577470000	Yes	26.7	23.6	51.0	9.2 (7.0)	(6.0 - 8.0)	1609	11	777
	55	235/55 R 17	99 H	SL	BSW	15576580000	Yes	27.2	24.9	51.0	9.6 (7.5)	(6.5 - 8.5)	1709	11	764
	55	235/55 R 17	99 T	SL	BSW	15576570000	Yes	27.2	24.9	44.0	9.6 (7.5)	(6.5 - 8.5)	1709	11	764

BSW = Black Sidewall

Altimax RT⁴⁵ | Product Data

PASSENGER & CROSSOVER | ALL-SEASON | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
17	60	215/60 R 17	96 T	SL	BSW	15576310000	No	27.2	21.4	44.0	8.7 (6.5)	(6.0 - 7.5)	1565	11	765
	60	225/60 R 17	99 H	SL	BSW	15576470000	No	27.6	24.8	51.0	9.0 (6.5)	(6.0 - 8.0)	1709	11	752
	60	225/60 R 17	99 T	SL	BSW	15576460000	No	27.6	24.8	44.0	9.0 (6.5)	(6.0 - 8.0)	1709	11	752
	60	235/60 R 17	102 H	SL	BSW	15577550000	No	28.1	26.1	51.0	9.4 (7.0)	(6.5 - 8.5)	1874	11	739
	60	235/60 R 17	102 T	SL	BSW	15576620000	No	28.1	26.1	44.0	9.4 (7.0)	(6.5 - 8.5)	1874	11	739
	65	215/65 R 17	99 H	SL	BSW	15577700000	No	28.0	22.9	51.0	8.7 (6.5)	(6.0 - 7.5)	1709	11	742
	65	215/65 R 17	99 T	SL	BSW	15576340000	No	28.0	22.9	44.0	8.7 (6.5)	(6.0 - 7.5)	1709	11	742
	65	225/65 R 17	102 H	SL	BSW	15576520000	No	28.5	26.7	51.0	9.0 (6.5)	(6.0 - 8.0)	1874	11	729
	65	225/65 R 17	102 T	SL	BSW	15576510000	No	28.5	26.7	44.0	9.0 (6.5)	(6.0 - 8.0)	1874	11	729
	65	235/65 R 17	104 H	SL	BSW	15577770000	No	29.0	27.4	51.0	9.4 (7.0)	(6.5 - 8.5)	1984	11	716
	65	235/65 R 17	104 T	SL	BSW	15576650000	No	29.0	27.4	44.0	9.4 (7.0)	(6.5 - 8.5)	1984	11	716
	40	225/40 R 18	92 V	XL	BSW	15577710000	Yes	25.1	21.6	50.0	9.1 (8.0)	(7.5 - 9.0)	1389	11	828
	40	245/40 R 18	97 V	XL	BSW	15577620000	Yes	25.7	21.9	51.0	9.8 (8.5)	(8.0 - 9.5)	1609	11	808
18	45	225/45 R 18	95 V	XL	BSW	15577440000	Yes	26.0	22.4	51.0	8.9 (7.5)	(7.0 - 8.5)	1521	11	800
	45	235/45 R 18	98 V	XL	BSW	15577500000	Yes	26.3	23.4	51.0	9.3 (8.0)	(7.5 - 9.0)	1653	11	789
	45	245/45 R 18	100 V	XL	BSW	15577580000	Yes	26.7	23.0	51.0	9.6 (8.0)	(7.5 - 9.0)	1764	11	779
	50	225/50 R 18	95 H	SL	BSW	15577730000	Yes	26.9	22.4	51.0	9.2 (7.0)	(6.0 - 8.0)	1521	11	773
	50	225/50 R 18	95 T	SL	BSW	15576390000	Yes	26.9	22.4	44.0	9.2 (7.0)	(6.0 - 8.0)	1521	11	773
	50	235/50 R 18	97 H	SL	BSW	15576560000	Yes	27.3	23.9	51.0	9.6 (7.5)	(6.5 - 8.5)	1609	11	762
	50	235/50 R 18	97 V	SL	BSW	15577520000	Yes	27.3	23.9	51.0	9.6 (7.5)	(6.5 - 8.5)	1609	11	762
	50	245/50 R 18	100 V	SL	BSW	15577800000	Yes	27.6	24.4	51.0	10.0 (7.5)	(7.0 - 8.5)	1764	11	751
	55	215/55 R 18	95 H	SL	BSW	15577690000	Yes	27.3	23.7	51.0	8.9 (7.0)	(6.0 - 7.5)	1521	11	761
	55	215/55 R 18	95 T	SL	BSW	15576280000	Yes	27.3	23.7	44.0	8.9 (7.0)	(6.0 - 7.5)	1521	11	761
	55	225/55 R 18	98 H	SL	BSW	15576420000	Yes	27.7	25.2	51.0	9.2 (7.0)	(6.0 - 8.0)	1653	11	749
	55	235/55 R 18	100 H	SL	BSW	15576590000	Yes	28.2	25.4	51.0	9.6 (7.5)	(6.5 - 8.5)	1764	11	737
	55	235/55 R 18	100 T	SL	BSW	15577750000	Yes	28.2	26.4	44.0	9.6 (7.5)	(6.5 - 8.5)	1764	11	737
	55	235/55 R 18	104 V	XL	BSW	15577530000	Yes	28.2	26.0	51.0	9.6 (7.5)	(6.5 - 8.5)	1984	11	737
	55	245/55 R 18	103 T	SL	BSW	15576690000	Yes	28.6	28.7	44.0	10.0 (7.5)	(7.0 - 8.5)	1929	11	726
19	60	225/60 R 18	100 H	SL	BSW	15576480000	No	28.6	24.6	51.0	9.0 (6.5)	(6.0 - 8.0)	1764	11	726
	60	235/60 R 18	107 H	XL	BSW	15577760000	No	29.1	27.1	51.0	9.4 (7.0)	(6.5 - 8.5)	2149	11	714
	60	235/60 R 18	107 T	XL	BSW	15576630000	No	29.1	27.3	51.0	9.4 (7.0)	(6.5 - 8.5)	2149	11	714
	60	235/60 R 18	107 V	XL	BSW	15577560000	No	29.1	27.2	51.0	9.4 (7.0)	(6.5 - 8.5)	2149	11	714
	65	235/65 R 18	106 H	SL	BSW	15577780000	No	30.0	28.7	51.0	9.4 (7.0)	(6.5 - 8.5)	2094	11	692
	65	235/65 R 18	106 T	SL	BSW	15576660000	No	30.0	28.7	44.0	9.4 (7.0)	(6.5 - 8.5)	2094	11	692
	40	235/40 R 19	96 V	XL	BSW	15577200000	Yes	26.4	23.0	51.0	9.5 (8.5)	(8.0 - 9.5)	1565	11	787
	40	245/40 R 19	98 V	XL	BSW	15577630000	Yes	26.7	24.4	51.0	9.8 (8.5)	(8.0 - 9.5)	1653	11	778
	45	235/45 R 19	95 H	SL	BSW	15577510000	Yes	27.3	25.4	51.0	9.3 (8.0)	(7.5 - 9.0)	1521	11	760
	45	245/45 R 19	102 V	XL	BSW	15577590000	Yes	27.7	25.9	51.0	9.6 (8.0)	(7.5 - 9.0)	1874	11	750
20	45	255/45 R 19	104 V	XL	BSW	15577610000	Yes	28.0	25.5	51.0	10.0 (8.5)	(8.0 - 9.5)	1984	11	741
	50	235/50 R 19	99 H	SL	BSW	15577210000	Yes	28.3	24.8	51.0	9.6 (7.5)	(6.5 - 8.5)	1709	11	735
	55	225/55 R 19	99 H	SL	BSW	15576430000	Yes	28.7	26.4	51.0	9.2 (7.0)	(6.0 - 8.0)	1709	11	723
	55	235/55 R 19	101 H	SL	BSW	15577830000	Yes	29.2	26.8	51.0	9.6 (7.5)	(6.5 - 8.5)	1819	11	712
	55	235/55 R 19	105 V	XL	BSW	15577540000	Yes	29.2	26.3	51.0	9.6 (7.5)	(6.5 - 8.5)	2039	11	712
	55	245/55 R 19	103 H	SL	BSW	15577820000	Yes	29.6	30.2	51.0	10.0 (7.5)	(7.0 - 8.5)	1929	11	702
	40	245/40 R 20	99 V	XL	BSW	15577790000	Yes	27.7	25.1	51.0	9.8 (8.5)	(8.0 - 9.5)	1709	11	750
45	245/45 R 20	99 V	SL	BSW	15577600000	Yes	28.7	25.2	51.0	9.6 (8.0)	(7.5 - 9.0)	1709	11	724	

BSW = Black Sidewall

ALTI MAX RT⁴⁵

| Product Data

PASSENGER & CROSSOVER | ALL-SEASON | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDS)	REVS PER MILE
20	50	245/50 R 20	105 H	XL	BSW	15576680000	Yes	29.6	29.3	51.0	10.0 (7.5)	(7.0 - 8.5)	2039	11	701
	50	245/50 R 20	105 V	XL	BSW	15577810000	Yes	29.6	28.2	51.0	10.0 (7.5)	(7.0 - 8.5)	2039	11	701
	55	235/55 R 20	102 H	SL	BSW	15577840000	Yes	30.2	29.0	51.0	9.6 (7.5)	(6.5 - 8.5)	1874	11	688

BSW = Black Sidewall


GENERAL TIRE 

DELIVERS



PASSENGER & CROSSOVER | ALL-WEATHER | TOURING


AltiMAX 365 AW

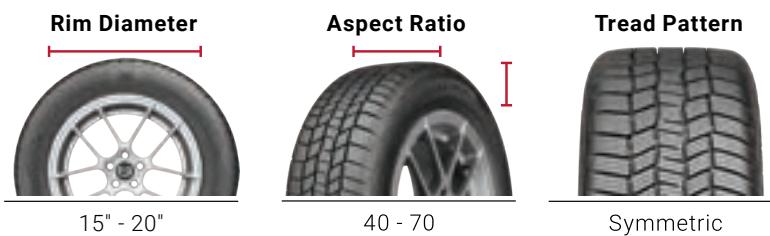

TREADWEAR	TRACTION	TEMPERATURE	SPEED	WARRANTY
640	A	A	H	60,000 Miles
540	A	A	V	60,000 Miles

Benefits

- Symmetric tread pattern allows for the tire to be rotated, promoting long, even tread life
- Best-in-class all-around performance*
- Confident driving in all weather conditions
- Balanced performance on wet and dry roads
- Optimal traction in deep snow



Visual Alignment Indicators

Indicators in both sides of the tread wear off evenly, ensuring the driver of proper alignment, or wear off unevenly, alerting the driver to check the wheel alignment.



3-Peak Mountain Snowflake

Meets the severe snow service requirements of the U.S. Tire Manufacturers Association (USTMA) and the Tire and Rubber Association of Canada (TRAC).

Sample Vehicle Fitments Include:

- | | |
|-------------|--------------|
| • Acura | • Kia |
| • BMW | • Lexus |
| • Cadillac | • Mazda |
| • Chevrolet | • Nissan |
| • Fiat | • Subaru |
| • Ford | • Toyota |
| • Honda | • Volkswagen |
| • Hyundai | |



CUSTOMER SATISFACTION TRIAL

Or the first 2/32nds of tread. See warranty manual for complete details.

*Based on internal tire test results of the following key performance categories: dry handling, wet handling, comfort, snow traction, and ice braking, compared to Firestone WeatherGrip, Nokian WR G4 & Toyo Celsius in the size 205/65R16. On road results may vary.

Altimax 365 AW | Product Data

PASSENGER & CROSSOVER | ALL-WEATHER | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
15	55	185/55 R 15	82 H	SL	BSW	15574920000	Yes	23.0	16.6	51.0	7.6 (6.0)	(5.0 - 6.5)	1047	11	903
	60	185/60 R 15	84 H	SL	BSW	15574790000	No	23.7	16.9	51.0	7.4 (5.5)	(5.0 - 6.5)	1102	11	875
	60	195/60 R 15	88 H	SL	BSW	15574640000	No	24.2	17.7	51.0	7.9 (6.0)	(5.5 - 7.0)	1235	11	858
	65	175/65 R 15	84 H	SL	BSW	15574850000	No	24.0	15.7	51.0	7.0 (5.0)	(5.0 - 6.0)	1102	11	867
	65	185/65 R 15	88 H	SL	BSW	15574570000	No	24.5	16.3	51.0	7.4 (5.5)	(5.0 - 6.5)	1235	11	849
	65	195/65 R 15	91 H	SL	BSW	15574410000	No	25.0	17.8	51.0	7.9 (6.0)	(5.5 - 7.0)	1356	11	832
16	55	205/55 R 16	91 H	SL	BSW	15574400000	Yes	24.9	21.7	51.0	8.4 (6.5)	(5.5 - 7.5)	1356	11	835
	55	215/55 R 16	97 H	XL	BSW	15574690000	Yes	25.3	22.6	51.0	8.9 (7.0)	(6.0 - 7.5)	1609	11	821
	60	205/60 R 16	92 V	SL	BSW	15574490000	No	25.7	19.7	51.0	8.2 (6.0)	(5.5 - 7.5)	1389	11	809
	60	215/60 R 16	95 H	SL	BSW	15574420000	No	26.2	21.6	51.0	8.7 (6.5)	(6.0 - 7.5)	1521	11	794
	60	225/60 R 16	98 H	SL	BSW	15574670000	No	26.6	23.5	51.0	9.0 (6.5)	(6.0 - 8.0)	1653	11	780
	65	205/65 R 16	95 H	SL	BSW	15574700000	No	26.5	22.5	51.0	8.2 (6.0)	(5.5 - 7.5)	1521	11	784
	65	215/65 R 16	98 H	SL	BSW	15574470000	No	27.0	22.3	51.0	8.7 (6.5)	(6.0 - 7.5)	1653	11	769
	65	225/65 R 16	100 H	SL	BSW	15574560000	No	27.5	24.7	51.0	9.0 (6.5)	(6.0 - 8.0)	1764	11	755
17	70	215/70 R 16	100 H	SL	BSW	15574660000	No	27.9	26.6	51.0	8.7 (6.5)	(5.5 - 7.0)	1764	11	746
	45	215/45 R 17	87 V	SL	BSW	15574460000	Yes	24.6	21.5	51.0	8.4 (7.0)	(7.0 - 8.0)	1201	11	844
	45	225/45 R 17	94 V	XL	BSW	15574500000	Yes	25.0	22.7	51.0	8.9 (7.5)	(7.0 - 8.5)	1477	11	832
	45	235/45 R 17	97 V	XL	BSW	15574890000	Yes	25.3	23.0	51.0	9.3 (8.0)	(7.5 - 9.0)	1609	11	820
	50	205/50 R 17	93 V	XL	BSW	15574730000	Yes	25.1	22.5	51.0	8.4 (6.5)	(5.5 - 7.5)	1433	11	829
	50	215/50 R 17	95 V	XL	BSW	15574600000	Yes	25.5	23.3	51.0	8.9 (7.0)	(6.0 - 7.5)	1521	11	816
	50	225/50 R 17	94 V	SL	BSW	15574550000	Yes	25.9	24.4	51.0	9.2 (7.0)	(6.0 - 8.0)	1477	11	803
	55	215/55 R 17	94 V	SL	BSW	15574440000	Yes	26.3	23.8	51.0	8.9 (7.0)	(6.0 - 7.5)	1477	11	790
	55	225/55 R 17	97 V	SL	BSW	15574720000	Yes	26.7	24.5	51.0	9.2 (7.0)	(6.0 - 8.0)	1609	11	777
	55	235/55 R 17	99 H	SL	BSW	15574530000	Yes	27.2	25.2	51.0	9.6 (7.5)	(6.5 - 8.5)	1709	11	764
	60	215/60 R 17	96 H	SL	BSW	15574740000	No	27.2	22.6	51.0	8.7 (6.5)	(6.0 - 7.5)	1565	11	765
	60	225/60 R 17	99 H	SL	BSW	15574520000	No	27.6	24.9	51.0	9.0 (6.5)	(6.0 - 8.0)	1709	11	752
	60	235/60 R 17	102 H	SL	BSW	15574780000	No	28.1	26.7	51.0	9.4 (7.0)	(6.5 - 8.5)	1874	11	739
	65	215/65 R 17	99 H	SL	BSW	15574860000	No	28.0	25.1	51.0	8.7 (6.5)	(6.0 - 7.5)	1709	11	742
	65	225/65 R 17	102 H	SL	BSW	15574380000	No	28.5	27.1	51.0	9.0 (6.5)	(6.0 - 8.0)	1874	11	729
	65	235/65 R 17	104 H	SL	BSW	15574480000	No	29.0	28.8	51.0	9.4 (7.0)	(6.5 - 8.5)	1984	11	716
18	40	225/40 R 18	92 V	XL	BSW	15574610000	Yes	25.1	22.7	51.0	9.1 (8.0)	(7.5 - 9.0)	1389	11	828
	40	245/40 R 18	97 V	XL	BSW	15574820000	Yes	25.7	22.8	51.0	9.8 (8.5)	(8.0 - 9.5)	1609	11	808
	45	225/45 R 18	95 V	XL	BSW	15574630000	Yes	26.0	23.1	51.0	8.9 (7.5)	(7.0 - 8.5)	1521	11	800
	45	235/45 R 18	98 V	XL	BSW	15574450000	Yes	26.3	24.4	51.0	9.3 (8.0)	(7.5 - 9.0)	1653	11	789
	45	245/45 R 18	100 V	XL	BSW	15574870000	Yes	26.7	23.8	51.0	9.6 (8.0)	(7.5 - 9.0)	1764	11	779
	50	225/50 R 18	95 H	SL	BSW	15574830000	Yes	26.9	23.4	51.0	9.2 (7.0)	(6.0 - 8.0)	1521	11	773
	50	235/50 R 18	97 V	SL	BSW	15574590000	Yes	27.3	25.1	51.0	9.6 (7.5)	(6.5 - 8.5)	1609	11	762
	55	225/55 R 18	98 H	SL	BSW	15574810000	Yes	27.7	26.5	51.0	9.2 (7.0)	(6.0 - 8.0)	1653	11	749
	55	235/55 R 18	100 V	SL	BSW	15574510000	Yes	28.2	26.7	51.0	9.6 (7.5)	(6.5 - 8.5)	1764	11	737
	55	245/55 R 18	103 V	SL	BSW	15574840000	Yes	28.6	27.5	51.0	10.0 (7.5)	(7.0 - 8.5)	1929	11	726
	55	255/55 R 18	109 V	XL	BSW	15574750000	Yes	29.0	30.1	51.0	10.4 (8.0)	(7.0 - 9.0)	2271	11	715

BSW = Black Sidewall



Altimax^{365 AW}

| Product Data

PASSENGER & CROSSOVER | ALL-WEATHER | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32 ND S)	REVS PER MILE
18	60	225/60 R 18	100 H	SL	BSW	15574800000	No	28.6	26.7	51.0	9.0 (6.5)	(6.0 - 8.0)	1764	11	726
	60	235/60 R 18	107 H	XL	BSW	15574430000	No	29.1	28.3	51.0	9.4 (7.0)	(6.5 - 8.5)	2149	11	714
	60	245/60 R 18	105 H	SL	BSW	15574620000	No	29.6	31.3	51.0	9.8 (7.0)	(7.0 - 8.5)	2039	11	702
	65	235/65 R 18	106 H	SL	BSW	15574760000	No	30.0	30.1	51.0	9.4 (7.0)	(6.5 - 8.5)	2094	11	692
19	45	245/45 R 19	102 V	XL	BSW	15574880000	Yes	27.7	25.9	51.0	9.6 (8.0)	(7.5 - 9.0)	1874	11	750
	50	255/50 R 19	107 V	XL	BSW	15574900000	Yes	29.0	31.5	51.0	10.4 (8.0)	(7.0 - 9.0)	2149	11	715
	55	225/55 R 19	99 H	SL	BSW	15574650000	Yes	28.7	26.8	51.0	9.2 (7.0)	(6.0 - 8.0)	1709	11	723
	55	235/55 R 19	105 H	XL	BSW	15574680000	Yes	29.2	27.0	51.0	9.6 (7.5)	(6.5 - 8.5)	2039	11	712
20	55	245/55 R 19	103 H	SL	BSW	15574710000	Yes	29.6	31.8	51.0	10.0 (7.5)	(7.0 - 8.5)	1929	11	702
	50	245/50 R 20	105 V	XL	BSW	15574580000	Yes	29.6	27.7	51.0	10.0 (7.5)	(7.0 - 8.5)	2039	11	701
	55	235/55 R 20	102 V	SL	BSW	15574770000	Yes	30.2	29.4	51.0	9.6 (7.5)	(6.5 - 8.5)	1874	11	688

BSW = Black Sidewall


GENERAL TIRE 

DELIVERS



CROSSOVER & LT/SUV | ALL-SEASON | TOURING

GRABBER H/T

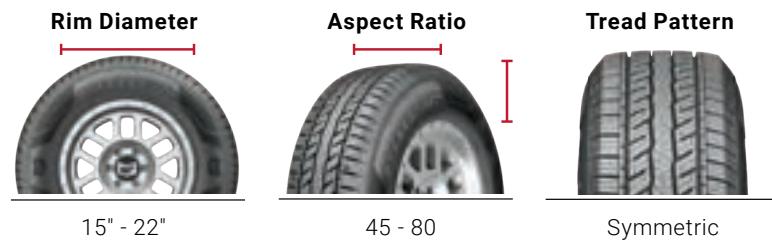

TREADWEAR	TRACTION	TEMPERATURE	SPEED	WARRANTY
720 (Metric)	B	B	S & T	70,000 Miles
720 (Metric)	B	A	H	70,000 Miles
720 (Metric)	B	A	V	65,000 Miles
-- (LT)	--	--	R & S	50,000 Miles

Benefits

- Expansive size lineup which includes 6 V-speed rated articles
- Best-in-class wet braking*
- Best-in-class snow traction*
- Best-in-class treadwear*
- Enhanced strength & durability
- Low road noise




CUSTOMER SATISFACTION TRIAL

Or the first 2/32^{nds} of tread. See warranty manual for complete details.




Duragen Technology

- Enhances strength and durability
- Delivers cut-and-chip resistance
- Extends tread life



Replacement Tire Monitor

Letters in the tread wear off to read "REPLACE TIRE" when the tire wears to 2/32 of tread depth, indicating a tire change is needed.



Visual Alignment Indicators

Indicators in both sides of the tread wear off evenly, ensuring the driver of proper alignment, or wear off unevenly, alerting the driver to check the wheel alignment.

Sample Vehicle Fitments Include:

- Chevrolet: Colorado, Tahoe, Traverse, Silverado, Suburban
- Ford: Edge, Escape, Expedition, Explorer, F-150, F-250
- GMC: Acadia, Sierra
- Honda: CR-V, Passport, Pilot, Ridgeline
- Jeep: Cherokee, Grand Cherokee
- Mazda: CX-5, CX-9
- Nissan: Armada, Frontier, Murano, Pathfinder, Rogue, Titan
- RAM: 1500, 2500
- Toyota: 4Runner, Highlander, Tacoma, Tundra, Venza

*Based on internal testing of Grabber H/T versus Firestone Destination LE3, Cooper Endeavor Plus, Toyo Open Country H/T II, and Hankook Dynapro HT RH12 in size 265/60R18. On road results may vary.

GRABBER H/T | Product Data

Crossover & LT/SUV | All-Season | Touring

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
15	70	255/70 R 15	108 T	SL	OWL	04493330000	Yes	29.1	32.4	44.0	10.2 (7.5)	(6.5 - 8.5)	2205	12	715
	75	265/75 R 15	112 T	SL	OWL	04493340000	Yes	30.6	35.1	44.0	10.5 (7.5)	(7.0 - 9.0)	2469	12	678
16	70	235/70 R 16	106 T	SL	BSW	04493360000	Yes	29.0	30.6	44.0	9.4 (7.0)	(6.0 - 8.0)	2094	12	718
	70	235/70 R 16	106 T	SL	OWL	04493370000	Yes	29.0	31.2	44.0	9.4 (7.0)	(6.0 - 8.0)	2094	12	718
	70	245/70 R 16	107 T	SL	BSW	04493380000	Yes	29.5	34.5	44.0	9.8 (7.0)	(6.5 - 8.0)	2149	12	704
	70	245/70 R 16	107 T	SL	OWL	04493390000	Yes	29.5	35.0	44.0	9.8 (7.0)	(6.5 - 8.0)	2149	12	704
	70	255/70 R 16	111 T	SL	OWL	04493440000	Yes	30.1	34.3	44.0	10.2 (7.5)	(6.5 - 8.5)	2403	12	691
	70	265/70 R 16	112 T	SL	BSW	04493450000	Yes	30.6	39.0	44.0	10.7 (8.0)	(7.0 - 9.0)	2469	12	679
	70	265/70 R 16	112 T	SL	OWL	04493460000	Yes	30.6	39.5	44.0	10.7 (8.0)	(7.0 - 9.0)	2469	12	679
	75	225/75 R 16	104 S	SL	BSW	04493350000	Yes	29.3	28.8	44.0	8.8 (6.0)	(6.0 - 7.5)	1984	12	709
	75	245/75 R 16	111 T	SL	BSW	04493400000	Yes	30.5	36.4	44.0	9.8 (7.0)	(6.5 - 8.0)	2403	12	682
	75	245/75 R 16	111 T	SL	OWL	04493410000	Yes	30.5	36.9	44.0	9.8 (7.0)	(6.5 - 8.0)	2403	12	682
	75	LT245/75 R 16	120/116 S	E	BSW	04493420000	Yes	30.5	41.6	80.0	9.8 (7.0)	(6.5 - 8.0)	3085	14	682
	75	LT245/75 R 16	120/116 S	E	OWL	04493430000	Yes	30.5	42.6	80.0	9.8 (7.0)	(6.5 - 8.0)	3085	14	682
	75	265/75 R 16	116 T	SL	OWL	04493470000	Yes	31.6	39.4	44.0	10.5 (7.5)	(7.0 - 9.0)	2756	12	656
	75	LT265/75 R 16	123/120 R	E	OWL	04493480000	Yes	31.6	47.6	80.0	10.5 (7.5)	(7.0 - 8.0)	3415	14	656
17	65	245/65 R 17	107 T	SL	BSW	04493500000	Yes	29.5	34.8	44.0	9.8 (7.0)	(7.0 - 8.5)	2149	12	703
	65	245/65 R 17	107 T	SL	OWL	04493510000	Yes	29.5	35.3	44.0	9.8 (7.0)	(7.0 - 8.5)	2149	12	703
	65	255/65 R 17	110 T	SL	OWL	04493550000	Yes	30.1	36.8	44.0	10.2 (7.5)	(7.0 - 9.0)	2337	12	691
	65	265/65 R 17	112 T	SL	OWL	04493560000	Yes	30.6	37.5	44.0	10.7 (8.0)	(7.5 - 9.5)	2469	12	680
	70	245/70 R 17	110 T	SL	OWL	04493520000	Yes	30.5	36.5	44.0	9.8 (7.0)	(6.5 - 8.0)	2337	12	681
	70	LT245/70 R 17	119/116 S	E	OWL	04493530000	Yes	30.5	43.0	80.0	9.8 (7.0)	(6.5 - 8.0)	3000	14	681
	70	265/70 R 17	115 T	SL	BSW	04493570000	Yes	31.6	41.4	44.0	10.7 (8.0)	(7.0 - 9.0)	2679	12	657
	70	265/70 R 17	115 T	SL	OWL	04493580000	Yes	31.6	39.1	44.0	10.7 (8.0)	(7.0 - 9.0)	2679	12	657
	70	LT265/70 R 17	123/120 S	E	OWL	04493590000	Yes	31.6	48.6	80.0	10.7 (8.0)	(7.0 - 8.5)	3415	14	657
	75	LT245/75 R 17	121/118 S	E	BSW	04493540000	Yes	31.5	44.0	80.0	9.8 (7.0)	(6.5 - 7.5)	3195	14	660
	80	LT235/80 R 17	120/117 R	E	OWL	04493490000	Yes	31.8	43.9	80.0	9.3 (6.5)	(6.0 - 7.5)	3085	14	653
18	60	235/60 R 18	103 H	SL	BSW	04493600000	Yes	29.1	30.4	51.0	9.4 (7.0)	(6.5 - 8.5)	1929	12	714
	60	245/60 R 18	105 H	SL	BSW	04493630000	Yes	29.6	31.2	51.0	9.8 (7.0)	(7.0 - 8.5)	2039	12	702
	60	245/60 R 18	105 T	SL	BSW	04493640000	Yes	29.6	31.0	44.0	9.8 (7.0)	(7.0 - 8.5)	2039	12	702
	60	245/60 R 18	105 V	SL	BSW	04493650000	Yes	29.6	29.9	51.0	9.8 (7.0)	(7.0 - 8.5)	2039	11	702
	60	265/60 R 18	110 H	SL	BSW	04493700000	Yes	30.5	37.6	51.0	10.7 (8.0)	(7.5 - 9.5)	2337	12	681
	60	265/60 R 18	110 T	SL	BSW	04493690000	Yes	30.5	39.1	44.0	10.7 (8.0)	(7.5 - 9.5)	2337	12	681
	65	235/65 R 18	106 T	SL	BSW	04493610000	Yes	30.0	30.8	44.0	9.4 (7.0)	(6.5 - 8.5)	2094	12	692
	65	235/65 R 18	106 V	SL	BSW	04493620000	Yes	30.0	29.8	51.0	9.4 (7.0)	(6.5 - 8.5)	2094	11	692
	65	255/65 R 18	111 H	SL	BSW	04493670000	Yes	31.1	38.5	51.0	10.2 (7.5)	(7.0 - 9.0)	2403	12	669
	65	255/65 R 18	111 T	SL	BSW	04493660000	Yes	31.1	36.9	44.0	10.2 (7.5)	(7.0 - 9.0)	2403	12	669
	65	265/65 R 18	114 T	SL	OWL	04493710000	Yes	31.6	39.0	44.0	10.7 (8.0)	(7.5 - 9.5)	2601	12	658
	65	275/65 R 18	116 T	SL	OWL	04493730000	Yes	32.1	42.0	44.0	11.0 (8.0)	(7.5 - 9.5)	2756	12	648
	65	LT275/65 R 18	123/120 S	E	OWL	04493740000	Yes	32.1	50.8	80.0	11.0 (8.0)	(7.5 - 9.0)	3415	14	648
	70	255/70 R 18	113 T	SL	OWL	04493680000	Yes	32.1	38.4	44.0	10.2 (7.5)	(6.5 - 8.5)	2535	12	648

BSW = Black Sidewall | OWL = Outlined White Letter



GRABBER H/T | Product Data

Crossover & LT/SUV | All-Season | Touring

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32 ND S)	REVS PER MILE
18	70	265/70 R 18	116 T	SL	OWL	04493720000	Yes	32.6	43.2	44.0	10.7 (8.0)	(7.0 - 9.0)	2756	12	637
	70	LT275/70 R 18	125/122 S	E	OWL	04493750000	Yes	33.2	53.1	80.0	11.0 (8.0)	(7.0 - 8.5)	3640	14	627
19	55	225/55 R 19	99 V	SL	BSW	04493760000	Yes	28.7	30.3	51.0	9.2 (7.0)	(6.0 - 8.0)	1709	11	723
	55	235/55 R 19	105 H	XL	BSW	04493770000	Yes	29.2	32.7	50.0	9.6 (7.5)	(6.5 - 8.5)	2039	12	712
	55	245/55 R 19	103 T	SL	BSW	04493780000	Yes	29.6	32.8	44.0	10.0 (7.5)	(7.0 - 8.5)	1929	12	702
	60	255/60 R 19	109 H	SL	BSW	04493790000	Yes	31.0	37.2	51.0	10.2 (7.5)	(7.0 - 9.0)	2271	12	669
20	45	275/45 R 20	110 V	XL	BSW	04493990000	Yes	29.7	35.9	50.0	10.7 (9.0)	(8.5 - 10.5)	2337	11	698
	50	255/50 R 20	105 T	SL	BSW	04493840000	Yes	30.0	33.4	44.0	10.4 (8.0)	(7.0 - 9.0)	2039	12	692
	50	255/50 R 20	109 H	XL	BSW	04493830000	Yes	30.0	36.4	50.0	10.4 (8.0)	(7.0 - 9.0)	2271	12	692
	50	265/50 R 20	107 T	SL	BSW	04493860000	Yes	30.4	36.3	44.0	10.9 (8.5)	(7.5 - 9.5)	2149	12	683
	50	265/50 R 20	111 V	XL	BSW	04493870000	Yes	30.4	36.2	50.0	10.9 (8.5)	(7.5 - 9.5)	2403	11	683
	55	235/55 R 20	102 H	SL	BSW	04493800000	Yes	30.2	34.8	51.0	9.6 (7.5)	(6.5 - 8.5)	1874	12	688
	55	235/55 R 20	102 V	SL	BSW	04493810000	Yes	30.2	29.3	51.0	9.6 (7.5)	(6.5 - 8.5)	1874	11	688
	55	255/55 R 20	107 H	SL	BSW	04493850000	Yes	31.0	35.0	51.0	10.4 (8.0)	(7.0 - 9.0)	2149	12	669
	55	275/55 R 20	117 H	XL	BSW	04493930000	Yes	31.9	37.7	50.0	11.2 (8.5)	(7.5 - 9.5)	2833	12	651
	55	275/55 R 20	117 T	XL	BSW	04493920000	Yes	31.9	37.7	50.0	11.2 (8.5)	(7.5 - 9.5)	2833	12	651
	60	245/60 R 20	107 H	SL	BSW	04493820000	Yes	31.6	34.3	51.0	9.8 (7.0)	(7.0 - 8.5)	2149	12	658
	60	275/60 R 20	115 H	SL	BSW	04493940000	Yes	33.0	44.0	51.0	11.0 (8.0)	(7.5 - 9.5)	2679	12	630
22	65	LT275/65 R 20	126/123 S	E	OWL	04493950000	Yes	34.1	55.4	80.0	11.0 (8.0)	(7.5 - 9.5)	3750	14	610
	45	285/45 R 22	114 H	XL	BSW	04493970000	Yes	32.1	42.6	50.0	11.2 (9.5)	(9.0 - 10.5)	2601	12	647
	50	275/50 R 22	115 H	XL	BSW	04493960000	Yes	32.8	43.0	50.0	11.2 (8.5)	(7.5 - 9.5)	2679	12	633

BSW = Black Sidewall | OWL = Outlined White Letter

GENERAL TIRE 

DELIVERS



DELIVERS

for treading on or off the beaten path.

Our **all-terrain** products strike the balance between robust off-road durability and exceptional on-road performance.



Grabber APT



Grabber A/T^X




Grabber X³





CROSSOVER & LT/SUV | ALL-SEASON | ALL-TERRAIN

GRABBER APT

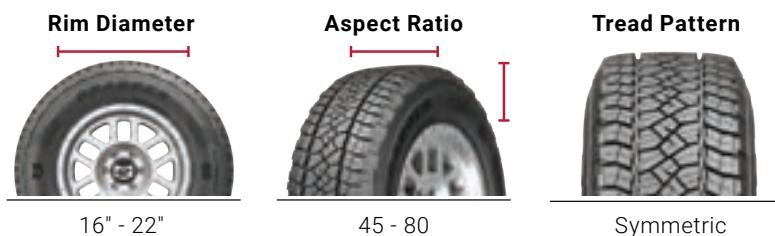

TREADWEAR	TRACTION	TEMPERATURE	SPEED	WARRANTY
520 (Metric)	A	B	S, T & H	60,000 Miles
-- (LT)	--	--	R & S	60,000 Miles

Benefits

- Available in LT and commercial sizes
- Balanced on-road performance with off-road traction
- Enhanced strength & durability
- Low road noise
- Long-lasting treadwear

DURAGEN
DTG
TECHNOLOGY

- Enhances strength and durability
- Delivers cut-and-chip resistance
- Extends tread life

3-Peak Mountain Snowflake
Select sizes meet the severe snow service requirements of the U.S. Tire Manufacturers Association (USTMA) and the Tire and Rubber Association of Canada (TRAC).

Sample Vehicle Fitments Include:

- Chevrolet: Silverado, Suburban & Tahoe
- Ford: Bronco, Expedition, F-150 & Super Duty
- Jeep: Gladiator, Grand Cherokee & Wrangler
- Nissan: Frontier, Pathfinder & Titan
- Ram: Pickup Trucks
- Toyota: 4Runner, Tacoma & Tundra



CUSTOMER SATISFACTION TRIAL

Or the first $2/32^{\text{nds}}$ of tread. See warranty manual for complete details.

GRABBER APT | Product Data

Crossover & LT/SUV | All-Season | All-Terrain

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
16	65	235/65 R 16 C	121/119 R	E	BSW	04504170000	Yes	28.0	37.2	90.0	9.4 (7.0)	(6.5 - 7.5)	3195	15	741
	70	265/70 R 16	112 T	SL	OWL	04507930000	Yes	30.6	41.6	44.0	10.7 (8.0)	(7.0 - 9.0)	2469	14	679
	75	LT225/75 R 16	115/112 R	E	BSW	04504190000	Yes	29.3	43.8	80.0	8.8 (6.0)	(6.0 - 7.0)	2680	16	709
	75	245/75 R 16	111 T	SL	OWL	04507810000	Yes	30.5	36.7	44.0	9.8 (7.0)	(6.5 - 8.0)	2403	14	682
	75	LT265/75 R 16	123/120 R	E	BSW	04504350000	Yes	31.6	50.4	80.0	10.5 (7.5)	(7.0 - 8.0)	3415	16	656
17	65	225/65 R 17	102 H	SL	BSW	04492620000	Yes	28.5	30.9	51.0	9.0 (6.5)	(6.0 - 8.0)	1874	13	729
	65	255/65 R 17	110 T	SL	OWL	04508010000	Yes	30.1	38.3	44.0	10.2 (7.5)	(7.0 - 9.0)	2337	14	691
	65	265/65 R 17	112 T	SL	OWL	04508020000	Yes	30.6	39.6	44.0	10.7 (8.0)	(7.5 - 9.5)	2469	14	680
	70	LT245/70 R 17	119/116 R	E	OWL	04504410000	Yes	30.5	47.6	80.0	9.8 (7.0)	(6.5 - 8.0)	3000	16	681
	70	255/70 R 17	112 T	SL	OWL	04507970000	Yes	31.1	39.9	44.0	10.2 (7.5)	(6.5 - 8.5)	2469	14	669
	70	265/70 R 17	115 T	SL	OWL	04507980000	Yes	31.6	44.4	44.0	10.7 (8.0)	(7.0 - 9.0)	2679	14	657
	70	LT265/70 R 17	121/118 S	E	OWL	04492410000	Yes	31.6	51.7	80.0	10.7 (8.0)	(7.0 - 8.5)	3195	16	657
	70	LT265/70 R 17	112/109 S	C	BSW	15570730000	Yes	31.6	42.8	50.0	10.7 (8.0)	(7.0 - 8.5)	2470	12	657
	70	LT285/70 R 17	121/118 S	E	BSW	04492420000	Yes	32.7	58.1	80.0	11.5 (8.5)	(7.5 - 9.0)	3195	16	635
	75	LT245/75 R 17	121/118 S	E	BSW	04504310000	Yes	31.5	50.0	80.0	9.8 (7.0)	(6.5 - 7.5)	3195	16	660
18	75	255/75 R 17	115 T	SL	OWL	04507950000	Yes	32.1	41.2	44.0	10.0 (7.0)	(6.5 - 8.5)	2679	14	648
	80	LT235/80 R 17	120/117 R	E	BSW	04504250000	Yes	31.8	48.5	80.0	9.3 (6.5)	(6.0 - 7.5)	3085	16	653
	60	265/60 R 18	110 T	SL	BSW	04508080000	Yes	30.5	39.7	44.0	10.7 (8.0)	(7.5 - 9.5)	2337	14	681
	65	265/65 R 18	114 T	SL	OWL	04508060000	Yes	31.6	41.7	44.0	10.7 (8.0)	(7.5 - 9.5)	2601	14	658
	65	275/65 R 18	116 T	SL	OWL	04508070000	Yes	32.1	44.8	44.0	11.0 (8.0)	(7.5 - 9.5)	2756	14	648
	65	LT275/65 R 18	123/120 R	E	BSW	04507640000	Yes	32.1	55.9	80.0	11.0 (8.0)	(7.5 - 9.0)	3415	15	648
	70	255/70 R 18	113 T	SL	OWL	04508030000	Yes	32.1	41.7	44.0	10.2 (7.5)	(6.5 - 8.5)	2535	14	648
	70	LT265/70 R 18	113/110 S	C	BSW	04492580000	Yes	32.6	43.9	50.0	10.7 (8.0)	(7.0 - 9.0)	2535	13	637
20	70	LT275/70 R 18	125/122 S	E	OWL	04508050000	Yes	33.2	56.7	80.0	11.0 (8.0)	(7.0 - 8.5)	3640	16	627
	70	P275/70 R 18	116 S	SL	BSW	04492870000	No	33.2	40.3	44.0	11.0 (8.0)	(7.0 - 9.0)	2756	13	627
	55	275/55 R 20	117 T	XL	BSW	04508100000	Yes	31.9	44.4	51.0	11.2 (8.5)	(7.5 - 9.5)	2833	14	651
20	60	275/60 R 20	115 T	SL	BSW	04508090000	Yes	33.0	45.0	44.0	11.0 (8.0)	(7.5 - 9.5)	2679	14	630
	45	285/45 R 22	114 H	XL	BSW	04508110000	Yes	32.1	43.0	51.0	11.2 (9.5)	(9.0 - 10.5)	2601	13	647

BSW = Black Sidewall | OWL = Outlined White Letter





LT/SUV | ALL-SEASON | ALL-TERRAIN

GRABBER A/T^X

Rim Diameter	Aspect Ratio	Tread Pattern			
14" - 22"	45 - 85 (& Widths 8.50 - 13.50)	Symmetric			
TREADWEAR		TRACTION	TEMPERATURE	SPEED	WARRANTY
640 (Metric)	A	B	S & T	60,000 Miles	
-- (LT)	--	--	Q & R	50,000 Miles	

Benefits

- Balanced off-road traction with on-road performance
- Robust strength and durability
- Aggressive styling
- Low road noise
- Long-lasting treadwear

DURAGENTM TECHNOLOGY




- Enhances strength and durability
- Delivers cut-and-chip resistance
- Extends tread life

3-Peak Mountain Snowflake
Meets the severe snow service requirements of the U.S. Tire Manufacturers Association (USTMA) and the Tire and Rubber Association of Canada (TRAC).



Pinned for Winter Studs
Stud length for metric sizes: 12mm (TSMI #13). Stud size listed on the tire's sidewall.



Sample Vehicle Fitments Include:

- Chevrolet: Silverado, Silverado HD & Tahoe
- Ford: Bronco, Explorer, F-150 & Super Duty
- Jeep: Gladiator, Grand Cherokee & Wrangler
- Nissan: Frontier, Pathfinder & Titan
- Ram: Pickup Trucks
- Toyota: 4Runner, Tacoma & Tundra



CUSTOMER SATISFACTION TRIAL

Or the first 2/32^{nds} of tread. See warranty manual for complete details.

GRABBER A/T^x | Product Data

LT/SUV | ALL-SEASON | ALL-TERRAIN

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
14	8.50	27 X 8.50 R 14 LT	95 Q	C	RWL	04508120000	Yes	27.0	30.9	50.0	8.6 (7.0)	(6.0 - 7.5)	1520	16	769
15	9.50	30 X 9.50 R 15 LT	104 S	C	RWL	04508400000	Yes	30.0	38.5	50.0	9.4 (7.5)	(6.5 - 8.5)	1984	16	692
	10.50	31 X 10.50 R 15 LT	109 S	C	RWL	04505590000	Yes	31.0	45.7	50.0	10.6 (8.5)	(7.0 - 9.0)	2270	17	670
	12.50	33 X 12.50 R 15 LT	108 R	E	RWL	04494910000	Yes	15.0	56.9	36.0	12.5 (10.0)	(8.5 - 11.0)	2205	17	1385
	70	225/70 R 15	100 T	SL	RWL	04504110000	Yes	27.4	31.3	44.0	9.0 (6.5)	(6.0 - 7.5)	1764	14	758
	70	265/70 R 15	112 T	SL	RWL	04504080000	Yes	29.6	38.6	44.0	10.7 (8.0)	(7.0 - 9.0)	2469	14	702
	75	205/75 R 15	97 T	SL	RWL	04503590000	Yes	27.1	28.5	44.0	8.0 (5.5)	(5.0 - 7.0)	1609	14	766
	75	215/75 R 15	100 T	SL	RWL	04503850000	Yes	27.7	31.5	44.0	8.5 (6.0)	(5.5 - 7.0)	1764	14	750
16	75	LT235/75 R 15	104/101 S	C	RWL	04507270000	Yes	28.9	36.6	50.0	9.3 (6.5)	(6.0 - 7.0)	1985	17	719
	65	215/65 R 16	98 T	SL	BSW	04503600000	Yes	27.0	29.7	44.0	8.7 (6.5)	(6.0 - 7.5)	1653	14	769
	70	215/70 R 16	100 T	SL	RWL	04503610000	Yes	27.9	31.0	44.0	8.7 (6.5)	(5.5 - 7.0)	1764	14	746
	70	255/70 R 16	111 T	SL	RWL	04504000000	Yes	30.1	39.7	44.0	10.2 (7.5)	(6.5 - 8.5)	2403	14	691
	70	265/70 R 16	112 T	SL	RWL	04509710000	Yes	30.6	41.3	44.0	10.7 (8.0)	(7.0 - 9.0)	2469	14	679
	70	LT305/70 R 16	124/121 R	E	RWL	04506790000	Yes	32.8	62.6	65.0	12.2 (9.0)	(8.0 - 9.5)	3525	16	633
	75	LT245/75 R 16	120/116 R	E	RWL	04494740000	Yes	30.5	46.8	80.0	9.8 (7.0)	(6.5 - 8.0)	3085	17	682
17	75	LT245/75 R 16	120/116 R	E	RWL	04508460000	Yes	30.5	48.1	80.0	9.8 (7.0)	(6.5 - 8.0)	3086	16	682
	75	LT265/75 R 16	123/120 R	E	RWL	04506330000	Yes	31.6	52.4	80.0	10.5 (7.5)	(7.0 - 8.0)	3415	16	656
	75	LT285/75 R 16	126/123 R	E	RWL	04508480000	Yes	32.8	58.3	80.0	11.3 (8.0)	(7.5 - 9.0)	3750	16	633
	75	LT315/75 R 16	127/124 R	E	RWL	04508490000	Yes	34.6	64.6	65.0	12.3 (8.5)	(8.0 - 11.0)	3860	16	600
	85	LT235/85 R 16	120/116 S	E	RWL	04508440000	Yes	31.7	49.5	80.0	9.3 (6.5)	(6.0 - 7.5)	3085	16	655
	12.50	35 X 12.50 R 17 LT	121 R	E	RWL	04507150000	Yes	35.0	62.9	65.0	12.5 (10.0)	(8.5 - 11.0)	3195	16	594
	65	265/65 R 17	112 T	SL	RWL	04509760000	Yes	30.6	43.2	44.0	10.7 (8.0)	(7.5 - 9.5)	2469	14	680
18	70	245/70 R 17	110 T	SL	RWL	04509740000	Yes	30.5	40.5	44.0	9.8 (7.0)	(6.5 - 8.0)	2337	14	681
	70	LT245/70 R 17	119/116 R	E	RWL	04494490000	Yes	30.5	46.4	80.0	9.8 (7.0)	(6.5 - 8.0)	3000	17	681
	70	255/70 R 17	112 T	SL	RWL	04509750000	Yes	31.1	42.1	44.0	10.2 (7.5)	(6.5 - 8.5)	2469	14	669
	70	265/70 R 17	115 T	SL	RWL	04507630000	Yes	31.6	44.4	44.0	10.7 (8.0)	(7.0 - 9.0)	2679	14	657
	70	LT265/70 R 17	112/109 T	C	BSW	04509790000	Yes	31.6	46.9	50.0	10.7 (8.0)	(7.0 - 8.5)	2470	16	657
	70	LT265/70 R 17	121/118 S	E	RWL	04505740000	Yes	31.6	53.0	80.0	10.7 (8.0)	(7.0 - 8.5)	3195	16	657
	70	LT275/70 R 17	121/118 R	E	RWL	04508360000	Yes	32.2	56.7	80.0	11.0 (8.0)	(7.0 - 8.5)	3195	16	646
19	70	LT285/70 R 17	121/118 S	E	RWL	04507250000	Yes	32.7	58.0	80.0	11.5 (8.5)	(7.5 - 9.0)	3195	16	635
	70	LT315/70 R 17	121/118 S	E	RWL	04508340000	Yes	34.4	65.7	65.0	12.7 (9.5)	(8.0 - 11.0)	3195	16	605
	75	LT245/75 R 17	121/118 S	E	RWL	04509880000	Yes	31.5	50.5	80.0	9.8 (7.0)	(6.5 - 7.5)	3195	16	660
	80	LT235/80 R 17	120/117 R	E	BSW	04508510000	Yes	31.8	49.5	80.0	9.3 (6.5)	(6.0 - 7.5)	3086	16	653
	12.50	35 X 12.50 R 18 LT	123 R	E	RWL	04505650000	Yes	35.0	65.6	65.0	12.5 (10.0)	(8.5 - 11.0)	3415	16	594
	60	LT285/60 R 18	122/119 S	E	BSW	04508250000	Yes	31.5	54.7	80.0	11.5 (8.5)	(8.0 - 10.0)	3305	16	660
	65	275/65 R 18	116 T	SL	RWL	04509720000	Yes	32.1	45.2	44.0	11.0 (8.0)	(7.5 - 9.5)	2756	14	648
20	65	LT275/65 R 18	123/120 R	E	RWL	04506340000	Yes	32.1	56.4	80.0	11.0 (8.0)	(7.5 - 9.0)	3415	16	648
	65	LT285/65 R 18	125/122 S	E	RWL	04508270000	Yes	32.6	57.0	80.0	11.5 (8.5)	(8.0 - 10.0)	3640	16	637
	70	255/70 R 18	113 T	SL	RWL	04492670000	Yes	32.1	43.3	44.0	10.2 (7.5)	(6.5 - 8.5)	2535	14	648
	70	265/70 R 18	116 T	SL	RWL	04504090000	Yes	32.6	45.8	44.0	10.7 (8.0)	(7.0 - 9.0)	2756	14	637
	70	LT265/70 R 18	124/121 S	E	RWL	04506020000	Yes	32.6	55.1	80.0	10.7 (8.0)	(7.0 - 9.0)	3525	16	637

BSW = Black Sidewall | RWL = Raised White Letter



GRABBER A/T^X

| Product Data

LT/SUV | ALL-SEASON | ALL-TERRAIN

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32 ND S)	REVS PER MILE
18	70	275/70 R 18	116 S	SL	BSW	04492430000	Yes	33.2	45.5	44.0	11.0 (8.0)	(7.0 - 9.0)	2756	14	627
	70	LT275/70 R 18	125/122 R	E	RWL	04506780000	Yes	33.2	59.2	80.0	11.0 (8.0)	(7.0 - 8.5)	3640	16	627
20	12.50	33 X 12.50 R 20 LT	114 S	E	BSW	04508130000	Yes	33.0	64.3	65.0	12.5 (10.0)	(8.5 - 11.0)	2600	16	630
	12.50	35 X 12.50 R 20 LT	121 R	E	BSW	04505690000	Yes	35.0	71.2	65.0	12.5 (10.0)	(8.5 - 11.0)	3195	16	594
	13.50	37 X 13.50 R 20 LT	127 R	E	BSW	15571240000	Yes	37.0	76.2	65.0	13.6 (11.0)	(8.5 - 11.0)	3860	16	561
	50	265/50 R 20	107 T	SL	BSW	04492690000	Yes	30.4	40.2	44.0	10.9 (8.5)	(7.5 - 9.5)	2149	14	683
	50	305/50 R 20	120 T	XL	BSW	04508150000	Yes	32.0	48.9	51.0	12.4 (9.5)	(8.5 - 11.0)	3086	14	649
	55	275/55 R 20	113 T	SL	BSW	04509770000	Yes	31.9	45.4	44.0	11.2 (8.5)	(7.5 - 9.5)	2535	14	651
	55	LT275/55 R 20	115/112 T	D	BSW	04508180000	Yes	31.9	55.1	65.0	11.2 (8.5)	(7.5 - 9.5)	2680	15	651
	55	LT285/55 R 20	117/114 T	D	BSW	04508170000	Yes	32.3	61.2	65.0	11.7 (9.0)	(8.0 - 10.0)	2833	15	642
	55	LT305/55 R 20	121/118 S	E	BSW	04508160000	Yes	33.2	59.7	65.0	12.4 (9.5)	(8.5 - 11.0)	3195	16	626
	60	LT265/60 R 20	121/118 S	E	BSW	04508220000	Yes	32.5	57.4	80.0	10.7 (8.0)	(7.5 - 9.5)	3195	16	639
	60	275/60 R 20	116 T	XL	BSW	04492700000	Yes	33.0	49.0	50.0	11.0 (8.0)	(7.5 - 9.5)	2756	14	630
22	60	LT275/60 R 20	119/116 S	D	BSW	04508210000	Yes	33.0	56.4	65.0	11.0 (8.0)	(7.5 - 9.5)	2998	16	630
	60	LT285/60 R 20	125/122 S	E	BSW	04508200000	Yes	33.5	60.7	80.0	11.5 (8.5)	(8.0 - 10.0)	3640	16	621
	60	LT325/60 R 20	126 S	E	BSW	04508190000	Yes	35.4	70.8	65.0	13.0 (9.5)	(9.0 - 12.0)	3750	16	588
	65	LT275/65 R 20	126/123 S	E	BSW	04508230000	Yes	34.1	58.5	80.0	11.0 (8.0)	(7.5 - 9.5)	3750	16	610
22	12.50	33 X 12.50 R 22 LT	114 Q	F	BSW	04491700000	Yes	33.0	61.0	80.0	12.50 (10.0)	(8.5 - 11.0)	2600	17	944
	12.50	35 X 12.50 R 22 LT	121 Q	F	RWL	04491740000	Yes	35.0	69.5	80.0	12.5 (10.0)	(8.5 - 11.0)	3195	17	594
	12.50	37 X 12.50 R 22 LT	127 Q	F	RWL	04491750000	Yes	37.0	69.9	80.0	12.50 (10.0)	(8.5 - 11.0)	3860	17	561
	45	305/45 R 22	118 T	XL	BSW	04491710000	Yes	32.8	46.5	51.0	11.9 (10.0)	(9.5 - 11.5)	2910	14	633

BSW = Black Sidewall | RWL = Raised White Letter

GENERAL TIRE 

DELIVERS



LT/SUV | ALL-SEASON | MUD-TERRAIN

GRABBER X³

Rim Diameter



15" - 20"

Aspect Ratio



70 - 75
(& Widths 10.50 - 12.50)

Tread Pattern



Symmetric



DURAGEN EG TECHNOLOGY

- Enhances strength and durability
- Delivers cut-and-chip resistance
- Extends tread life

Sample Vehicle Fitments Include:

- Chevrolet: Silverado & Silverado HD
- Ford: Bronco, F-150, F-250 & F-350
- Jeep: Gladiator & Wrangler
- Nissan: Plus-size Fitments
- Toyota: FJ Cruiser, Plus-size Fitments
- RAM: 1500, 2500 & 3500

Benefits

- Aggressive, bold styling
- Low road noise
- Race-proven durability and performance
- Extreme off-road traction in mud, dirt & rock-covered terrain
- Impressive wet and winter performance



CUSTOMER SATISFACTION TRIAL

Or the first 2/32^{nds} of tread. See warranty manual for complete details.

GRABBER X³

Product Data

LT/SUV | ALL-SEASON | MUD-TERRAIN

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
15	10.50	33 X 10.50 R 15 LT	114 Q	C	SRL	04506840000	Yes	33.0	60.8	50.0	10.6 (8.5)	(7.0 - 9.0)	2601	21	630
	12.50	35 X 12.50 R 15 LT	113 Q	C	BSW	04506270000	Yes	35.0	72.0	35.0	12.5 (10.0)	(8.5 - 11.0)	2535	21	594
16	75	LT285/75 R 16	126/123 Q	E	BSW	04494930000	Yes	32.8	61.3	80.0	11.3 (8.0)	(7.5 - 9.0)	3750	19	633
17	12.50	33 X 12.50 R 17 LT	114 Q	D	BSW	04505830000	Yes	33.0	70.7	50.0	12.5 (10.0)	(8.5 - 11.0)	2600	21	630
	12.50	35 X 12.50 R 17 LT	111 Q	C	SRL	04509890000	Yes	35.0	70.5	35.0	12.5 (10.0)	(8.5 - 11.0)	2405	21	594
	12.50	35 X 12.50 R 17 LT	121 Q	E	SRL	04505840000	Yes	35.0	75.8	65.0	12.5 (10.0)	(8.5 - 11.0)	3195	21	594
	12.50	35 X 12.50 R 17 LT	121 Q	E	BSW	04505850000	Yes	35.0	75.8	65.0	12.5 (10.0)	(8.5 - 11.0)	3195	21	594
	70	LT265/70 R 17	121/118 Q	E	SRL	04505760000	Yes	31.6	59.2	80.0	10.7 (8.0)	(7.0 - 8.5)	3195	18	657
	70	LT265/70 R 17	121/118 Q	E	BSW	04505770000	Yes	31.6	59.2	80.0	10.7 (8.0)	(7.0 - 8.5)	3195	18	657
	70	LT285/70 R 17	121/118 Q	E	SRL	04505780000	Yes	32.7	64.8	80.0	11.5 (8.5)	(7.5 - 9.0)	3195	18	635
18	70	LT315/70 R 17	121/118 Q	E	BSW	04505810000	Yes	34.4	73.0	65.0	12.7 (9.5)	(8.0 - 11.0)	3195	19	605
18	12.50	33 X 12.50 R 18 LT	118 Q	E	BSW	04505940000	Yes	33.0	72.5	65.0	12.5 (10.0)	(8.5 - 11.0)	2910	21	630
	12.50	35 X 12.50 R 18 LT	123 Q	E	BSW	04494980000	Yes	35.0	73.0	65.0	12.5 (10.0)	(8.5 - 11.0)	3415	21	594
20	12.50	33 X 12.50 R 20 LT	114 Q	E	BSW	04506050000	Yes	33.0	71.5	65.0	12.5 (10.0)	(8.5 - 11.0)	2601	21	630
	12.50	35 X 12.50 R 20 LT	121 Q	E	SRL	04506060000	Yes	35.0	76.2	65.0	12.5 (10.0)	(8.5 - 11.0)	3195	21	594
	12.50	35 X 12.50 R 20 LT	121 Q	E	BSW	04506070000	Yes	35.0	76.2	65.0	12.5 (10.0)	(8.5 - 11.0)	3195	21	594

BSW = Black Sidewall | SRL = Smooth Red Letter





DELIVERS

for finding alternate routes.

Our **winter** products are developed for superior traction on wet, snow and ice covered roads.



Altimax Arctic¹²



Grabber Arctic



Grabber Arctic LT





PASSENGER & CROSSOVER | WINTER | TOURING

Altimax Arctic¹²



14" - 19"



45 - 70



Directional

TREADWEAR

TRACTION

TEMPERATURE

SPEED

--


--

--

T

Benefits

- Excellent grip in low temperatures
- Reliable braking on wet, snow or ice-covered roads
- Superb steering response and dry handling
- Long-lasting treadwear



3-Peak Mountain Snowflake
Meets the severe snow service requirements of the U.S. Tire Manufacturers Association (USTMA) and the Tire and Rubber Association of Canada (TRAC).



Pinned for Winter Studs
Stud length for metric sizes: 11mm (TSMI #12). Stud size listed on the tire's sidewall.

Sample Vehicle Fitments Include:

- | | |
|-------------|-----------|
| • Audi | • Honda |
| • BMW | • Hyundai |
| • Chevrolet | • Kia |
| • Ford | • Nissan |
| • GM | • Toyota |



CUSTOMER SATISFACTION TRIAL

Or the first 2/32^{nds} of tread. See warranty manual for complete details.

ALTIMAX ARCTIC¹² | Product Data

PASSENGER & CROSSOVER | WINTER | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
14	65	185/65 R 14	90 T	XL	BSW	15502920000	No	23.5	16.4	51.0	7.4 (5.5)	(5.0 - 6.5)	1323	12	885
15	60	185/60 R 15	88 T	XL	BSW	15502930000	No	23.7	18.0	51.0	7.4 (5.5)	(5.0 - 6.5)	1235	12	875
	60	195/60 R 15	92 T	XL	BSW	15502780000	No	24.2	20.1	51.0	7.9 (6.0)	(5.5 - 7.0)	1389	12	858
	65	175/65 R 15	88 T	XL	BSW	15503110000	No	24.0	17.5	51.0	7.0 (5.0)	(5.0 - 6.0)	1235	12	867
	65	185/65 R 15	92 T	XL	BSW	15502800000	No	24.5	18.4	51.0	7.4 (5.5)	(5.0 - 6.5)	1389	12	849
	65	195/65 R 15	95 T	XL	BSW	15502760000	No	25.0	20.2	51.0	7.9 (6.0)	(5.5 - 7.0)	1521	12	832
	65	205/65 R 15	99 T	XL	BSW	15502880000	No	25.5	21.9	51.0	8.2 (6.0)	(5.5 - 7.5)	1709	12	815
	70	205/70 R 15	100 T	XL	BSW	15503030000	Yes	26.3	24.4	51.0	8.2 (6.0)	(5.0 - 7.0)	1764	12	790
16	70	215/70 R 15	103 T	XL	BSW	15502960000	No	26.9	26.4	51.0	8.7 (6.5)	(5.5 - 7.0)	1929	12	774
	55	205/55 R 16	94 T	XL	BSW	15502500000	No	24.9	21.7	51.0	8.4 (6.5)	(5.5 - 7.5)	1477	12	835
	55	215/55 R 16	97 T	XL	BSW	15502900000	No	25.3	23.3	51.0	8.9 (7.0)	(6.0 - 7.5)	1609	12	821
	55	225/55 R 16	99 T	XL	BSW	15503150000	No	25.7	24.9	51.0	9.2 (7.0)	(6.0 - 8.0)	1709	12	807
	60	205/60 R 16	96 T	XL	BSW	15502790000	No	25.7	23.3	51.0	8.2 (6.0)	(5.5 - 7.5)	1565	12	809
	60	215/60 R 16	99 T	XL	BSW	15502510000	No	26.2	23.7	51.0	8.7 (6.5)	(6.0 - 7.5)	1709	12	794
	60	225/60 R 16	102 T	XL	BSW	15502840000	No	26.6	26.6	51.0	9.0 (6.5)	(6.0 - 8.0)	1874	12	780
	60	235/60 R 16	104 T	XL	BSW	15503130000	Yes	27.1	30.6	51.0	9.4 (7.0)	(6.5 - 8.5)	1984	12	766
	65	205/65 R 16	99 T	XL	BSW	15502970000	No	26.5	22.8	51.0	8.2 (6.0)	(5.5 - 7.5)	1709	12	784
	65	215/65 R 16	102 T	XL	BSW	15502850000	Yes	27.0	26.4	51.0	8.7 (6.5)	(6.0 - 7.5)	1874	12	769
	65	225/65 R 16	104 T	XL	BSW	15503020000	No	27.5	29.2	51.0	9.0 (6.5)	(6.0 - 8.0)	1984	12	755
	70	215/70 R 16	104 T	XL	BSW	15502810000	Yes	27.9	29.3	51.0	8.7 (6.5)	(5.5 - 7.0)	1984	12	746
	70	225/70 R 16	107 T	XL	BSW	15503080000	Yes	28.4	30.0	51.0	9.0 (6.5)	(6.0 - 7.5)	2149	12	731
17	45	215/45 R 17	91 T	XL	BSW	15502990000	Yes	24.6	21.9	51.0	8.4 (7.0)	(7.0 - 8.0)	1356	12	844
	45	225/45 R 17	94 T	XL	BSW	15502950000	Yes	25.0	23.1	51.0	8.9 (7.5)	(7.0 - 8.5)	1477	12	832
	45	235/45 R 17	97 T	XL	BSW	15503060000	Yes	25.3	25.7	51.0	9.3 (8.0)	(7.5 - 9.0)	1609	12	820
	50	205/50 R 17	93 T	XL	BSW	15502890000	Yes	25.1	22.4	51.0	8.4 (6.5)	(5.5 - 7.5)	1433	12	829
	50	215/50 R 17	95 T	XL	BSW	15503050000	Yes	25.5	24.5	51.0	8.9 (7.0)	(6.0 - 7.5)	1521	12	816
	50	225/50 R 17	98 T	XL	BSW	15503100000	Yes	25.9	25.2	51.0	9.2 (7.0)	(6.0 - 8.0)	1653	12	803
	55	215/55 R 17	98 T	XL	BSW	15502830000	No	26.3	23.7	51.0	8.9 (7.0)	(6.0 - 7.5)	1653	12	790
	55	225/55 R 17	101 T	XL	BSW	15502910000	No	26.7	26.0	51.0	9.2 (7.0)	(6.0 - 8.0)	1819	12	777
	55	235/55 R 17	103 T	XL	BSW	15502940000	No	27.2	30.4	51.0	9.6 (7.5)	(6.5 - 8.5)	1929	12	764
	60	215/60 R 17	100 T	XL	BSW	15503000000	Yes	27.2	25.6	51.0	8.7 (6.5)	(6.0 - 7.5)	1764	12	765
	60	225/60 R 17	103 T	XL	BSW	15502820000	Yes	27.6	28.3	51.0	9.0 (6.5)	(6.0 - 8.0)	1929	12	752
	60	235/60 R 17	106 T	XL	BSW	15503140000	Yes	28.1	31.8	51.0	9.4 (7.0)	(6.5 - 8.5)	2094	12	739
	65	215/65 R 17	103 T	XL	BSW	15503090000	Yes	28.0	26.4	51.0	8.7 (6.5)	(6.0 - 7.5)	1929	12	742
	65	225/65 R 17	106 T	XL	BSW	15502770000	Yes	28.5	30.4	51.0	9.0 (6.5)	(6.0 - 8.0)	2094	12	729
	65	235/65 R 17	108 T	XL	BSW	15503010000	Yes	29.0	32.4	51.0	9.4 (7.0)	(6.5 - 8.5)	2205	12	716
18	45	225/45 R 18	95 T	XL	BSW	15503170000	Yes	26.0	24.9	51.0	8.9 (7.5)	(7.0 - 8.5)	1521	12	800
	45	235/45 R 18	98 T	XL	BSW	15503220000	Yes	26.3	25.6	51.0	9.3 (8.0)	(7.5 - 9.0)	1653	12	789
	50	225/50 R 18	99 T	XL	BSW	15503210000	Yes	26.9	26.4	51.0	9.2 (7.0)	(6.0 - 8.0)	1709	12	773
	55	225/55 R 18	102 T	XL	BSW	15503190000	Yes	27.7	27.6	51.0	9.2 (7.0)	(6.0 - 8.0)	1874	12	749
	55	235/55 R 18	104 T	XL	BSW	15503120000	Yes	28.2	28.7	51.0	9.6 (7.5)	(6.5 - 8.5)	1984	12	737

BSW = Black Sidewall



Altimax Arctic¹² | Product Data

PASSENGER & CROSSOVER | WINTER | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDS)	REVS PER MILE
18	60	225/60 R 18	104 T	XL	BSW	15503180000	Yes	28.6	29.7	51.0	9.0 (6.5)	(6.0 - 8.0)	1984	12	726
	60	235/60 R 18	107 T	XL	BSW	15503070000	Yes	29.1	32.1	51.0	9.4 (7.0)	(6.5 - 8.5)	2149	12	714
19	55	225/55 R 19	103 T	XL	BSW	15503200000	Yes	28.7	28.8	51.0	9.2 (7.0)	(6.0 - 8.0)	1929	12	723

BSW = Black Sidewall


GENERAL TIRE 

DELIVERS



LT/SUV | WINTER | TOURING

GRABBER ARCTIC



16" - 20"



55 - 75



Directional

TREADWEAR TRACTION TEMPERATURE SPEED

--

--

--

T

Benefits

- Excellent grip in low temperatures
- Reliable braking on wet, snow or ice-covered roads
- Superb steering response and dry handling
- Robust durability
- Long-lasting treadwear



DURAGEN
EG
TECHNOLOGY

- Enhances strength and durability
- Delivers cut-and-chip resistance
- Extends tread life



3-Peak Mountain Snowflake

Meets the severe snow service requirements of the U.S. Tire Manufacturers Association (USTMA) and the Tire and Rubber Association of Canada (TRAC).



Pinned for Winter Studs

Stud length for metric sizes: 11mm (TSMI #12). Stud size listed on the tire's sidewall.

Sample Vehicle Fitments Include:

- Chevrolet
- Ford
- Jeep
- Nissan
- Ram
- Toyota



CUSTOMER SATISFACTION TRIAL

Or the first 2/32nds of tread. See warranty manual for complete details.

GRABBER ARCTIC | Product Data

LT/SUV | WINTER | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
16	70	235/70 R 16	109 T	XL	BSW	15503280000	Yes	29.0	33.0	51.0	9.4 (7.0)	(6.0 - 8.0)	2271	12	718
	70	265/70 R 16	116 T	XL	BSW	15503340000	Yes	30.6	39.3	51.0	10.7 (8.0)	(7.0 - 9.0)	2756	12	679
	75	245/75 R 16	115 T	XL	BSW	15503330000	Yes	30.5	35.1	51.0	9.8 (7.0)	(6.5 - 8.0)	2679	12	682
17	65	245/65 R 17	111 T	XL	BSW	15503260000	Yes	29.5	34.7	51.0	9.8 (7.0)	(7.0 - 8.5)	2403	12	703
	65	265/65 R 17	116 T	XL	BSW	15503370000	Yes	30.6	36.6	51.0	10.7 (8.0)	(7.5 - 9.5)	2756	12	680
	70	245/70 R 17	114 T	XL	BSW	15503290000	Yes	30.5	34.8	51.0	9.8 (7.0)	(6.5 - 8.0)	2601	12	681
	70	265/70 R 17	116 T	XL	BSW	15502540000	Yes	31.6	39.2	51.0	10.7 (8.0)	(7.0 - 9.0)	2756	12	657
18	55	255/55 R 18	109 T	XL	BSW	15502560000	Yes	29.0	33.8	51.0	10.4 (8.0)	(7.0 - 9.0)	2271	12	715
	60	245/60 R 18	109 T	XL	BSW	15503310000	Yes	29.6	34.5	51.0	9.8 (7.0)	(7.0 - 8.5)	2271	12	702
	60	265/60 R 18	114 T	XL	BSW	15503350000	Yes	30.5	38.1	51.0	10.7 (8.0)	(7.5 - 9.5)	2601	12	681
	65	255/65 R 18	115 T	XL	BSW	15503380000	Yes	31.1	36.9	51.0	10.2 (7.5)	(7.0 - 9.0)	2679	12	669
	65	265/65 R 18	116 T	XL	BSW	15503360000	Yes	31.6	40.5	51.0	10.7 (8.0)	(7.5 - 9.5)	2756	12	658
	65	275/65 R 18	116 T	XL	BSW	15503300000	Yes	32.1	40.7	51.0	11.0 (8.0)	(7.5 - 9.5)	2756	12	648
20	55	275/55 R 20	117 T	XL	BSW	15503270000	Yes	31.9	39.9	51.0	11.2 (8.5)	(7.5 - 9.5)	2833	12	651
	60	275/60 R 20	116 T	XL	BSW	15503320000	Yes	33.0	41.5	51.0	11.0 (8.0)	(7.5 - 9.5)	2756	12	630


BSW = Black Sidewall






LT/SUV | WINTER | TOURING

GRABBER ARCTIC LT



16" - 20"



65 - 75



Symmetric

TREADWEAR	TRACTION	TEMPERATURE	SPEED
--	--	--	R

Benefits

- Symmetric tread pattern allows for the tire to be rotated, promoting long, even tread life
- Excellent grip in low temperatures
- Reliable braking on wet, snow or ice-covered roads
- Robust durability
- Superb steering response and dry handling
- Long-lasting treadwear



DURA GEN
E-G
TECHNOLOGY

- Enhances strength and durability
- Delivers cut-and-chip resistance
- Extends tread life



3-Peak Mountain Snowflake
Meets the severe snow service requirements of the U.S. Tire Manufacturers Association (USTMA) and the Tire and Rubber Association of Canada (TRAC).



Pinned for Winter Studs
Stud length for metric sizes: 12mm (TSMI #13).

Sample Vehicle Fitments Include:

- Chevrolet: Express Vans, Silverado, Suburban, Tahoe
- Ford: Bronco, Econoline Vans, Excursion, Expedition, F-Series, Pickup Trucks
- GMC: Savanna, Sierra, Yukon
- Mercedes Sprinter Van
- Ram: Pickup Trucks, Vans



CUSTOMER SATISFACTION TRIAL

Or the first $\frac{2}{32}$ nds of tread. See warranty manual for complete details.

GRABBER ARCTIC LT | Product Data

LT/SUV | WINTER | TOURING

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
16	75	LT225/75 R 16	115/112 R	E	BSW	04504420000	Yes	29.3	41.9	80.0	8.8 (6.0)	(6.0 - 7.0)	2680	16	709
	75	LT245/75 R 16	120/116 R	E	BSW	04504440000	Yes	30.5	46.4	80.0	9.8 (7.0)	(6.5 - 8.0)	3085	16	682
	75	LT265/75 R 16	123/120 R	E	BSW	04504450000	Yes	31.6	51.4	80.0	10.5 (7.5)	(7.0 - 8.0)	3415	16	656
17	70	LT245/70 R 17	119/116 R	E	BSW	04504460000	Yes	30.5	49.2	80.0	9.8 (7.0)	(6.5 - 8.0)	3000	16	681
	70	LT265/70 R 17	121/118 R	E	BSW	04504480000	Yes	31.6	53.4	80.0	10.7 (8.0)	(7.0 - 8.5)	3195	16	657
	75	LT245/75 R 17	121/118 R	E	BSW	04504470000	Yes	31.5	49.4	80.0	9.8 (7.0)	(6.5 - 7.5)	3195	16	660
18	65	LT275/65 R 18	123/120 R	E	BSW	04504500000	Yes	32.1	54.8	80.0	11.0 (8.0)	(7.5 - 9.0)	3415	16	648
	70	LT265/70 R 18	124/121 R	E	BSW	04504490000	Yes	32.6	54.7	80.0	10.7 (8.0)	(7.0 - 9.0)	3525	16	637
	70	LT275/70 R 18	125/122 R	E	BSW	04504510000	Yes	33.2	56.6	80.0	11.0 (8.0)	(7.0 - 8.5)	3640	16	627
20	65	LT275/65 R 20	126/123 R	E	BSW	04504520000	Yes	34.1	59.8	80.0	11.0 (8.0)	(7.5 - 9.5)	3750	16	610

BSW = Black Sidewall





DELIVERS

for getting the job done.

Our fleet-applicable products deliver the level of reliability that **government** and **commercial** vehicles demand.



Grabber HD



Grabber HD Van



G-MAX Justice



G-MAX Justice AW





GOVERNMENT/FLEET & LT/SUV | ALL-SEASON | COMMERCIAL

GRABBER HD

Rim Diameter



16" - 18"

Aspect Ratio



65 - 85

Tread Pattern



Symmetric

TREADWEAR

--

TRACTION

--

TEMPERATURE

--

SPEED

R & S

Benefits

- Exceptional traction, on and off the work site
- Dependable stability and handling under loaded conditions
- Robust durability with enhanced sidewall protection
- Up to 9% better treadwear versus the leading competitor*



CUSTOMER SATISFACTION TRIAL

Or the first $\frac{2}{32}$ nds of tread. See warranty manual for complete details.

*Based on internal treadwear test results compared to the Firestone Transforce HT2 in the size LT245/70R17 121/118R. On road results may vary.



DURAGEN TECHNOLOGY

- Enhances strength and durability
- Delivers cut-and-chip resistance
- Extends tread life



Sidewall Curb Guard

Additional rubber gauge added to the sidewall to increase robustness against curbs and other sidewall abrasions.

Sample Vehicle Fitments Include:

- Chevrolet: Silverado 2500
- Dodge: Ram 1500, Ram 2500, Ram 3500
- Ford: F-150, F-250/F-350 Super Duty
- GMC: Sierra 2500 HD

GRABBER HD | Product Data

GOVERNMENT/FLEET & LT/SUV | ALL-SEASON | COMMERCIAL

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
16	75	225/75 R 16 C	121/120 R	E	BSW	04507240000	No	29.3	38.8	90.0	8.8 (6.0)	(6.0 - 7.0)	3195	12	709
	75	LT225/75 R 16	115/112 R	E	BSW	04507160000	Yes	29.3	40.1	80.0	8.8 (6.0)	(6.0 - 7.0)	2680	14	709
	75	LT245/75 R 16	120/116 S	E	BSW	04507180000	Yes	30.5	44.3	80.0	9.8 (7.0)	(6.5 - 8.0)	3085	14	682
	75	LT265/75 R 16	123/120 R	E	BSW	04507190000	Yes	31.6	49.0	80.0	10.5 (7.5)	(7.0 - 8.0)	3415	14	656
	85	LT215/85 R 16	115/112 R	E	BSW	04507140000	Yes	30.4	41.6	80.0	8.5 (6.0)	(5.5 - 7.0)	2680	14	684
	85	LT235/85 R 16	120/116 R	E	BSW	04507170000	Yes	31.7	44.4	80.0	9.3 (6.5)	(6.0 - 7.5)	3085	14	655
17	70	LT245/70 R 17	119/116 R	E	BSW	04507210000	Yes	30.5	44.4	80.0	9.8 (7.0)	(6.5 - 8.0)	3000	14	681
	70	LT265/70 R 17	121/118 R	E	BSW	04507220000	Yes	31.6	50.8	80.0	10.7 (8.0)	(7.0 - 8.5)	3195	14	657
	75	LT245/75 R 17	121/118 S	E	BSW	04507200000	Yes	31.5	46.5	80.0	9.8 (7.0)	(6.5 - 7.5)	3195	14	660
	80	LT235/80 R 17	120/117 R	E	BSW	04509200000	Yes	31.8	46.7	80.0	9.3 (6.5)	(6.0 - 7.5)	3085	14	653
18	65	LT275/65 R 18	123/120 R	E	BSW	04509170000	Yes	32.1	52.1	80.0	11.0 (8.0)	(7.5 - 9.0)	3415	14	648
	70	LT265/70 R 18	124/121 R	E	BSW	04509180000	Yes	32.6	51.0	80.0	10.7 (8.0)	(7.0 - 9.0)	3525	14	637
	70	LT275/70 R 18	125/122 S	E	BSW	04509190000	Yes	33.2	54.3	80.0	11.0 (8.0)	(7.0 - 8.5)	3640	14	627

BSW = Black Sidewall





GOVERNMENT/FLEET & CARGO VAN | ALL-SEASON | COMMERCIAL

GRABBER HD VAN

Rim Diameter



15" - 16"

Aspect Ratio



60 - 75

Tread Pattern



Symmetric

TREADWEAR

--

TRACTION

--

TEMPERATURE

--

SPEED

R & T

Benefits

- Balanced performance on wet and dry roads
- Dependable stability and handling under loaded conditions
- Robust durability with enhanced sidewall protection
- Up to 25% better treadwear versus the leading competitors*



DURAGEN TG TECHNOLOGY

- Enhances strength and durability
- Delivers cut-and-chip resistance
- Extends tread life



Sidewall Curb Guard

Additional rubber gauge added to the sidewall to increase robustness against curbs and other sidewall abrasions.

Sample Vehicle Fitments Include:

- Transit Vans & Sprinters



CUSTOMER SATISFACTION TRIAL

Or the first 2/32^{nds} of tread. See warranty manual for complete details.

*Based on internal treadwear test results compared to the Goodyear Wrangler Fortitude HT, Firestone Transforce CV, and the Cooper Discoverer HT3 in the size 235/65R16C 121/119R.
On road results may vary.

GRABBER HD VAN | Product Data

GOVERNMENT/FLEET & CARGO VAN | ALL-SEASON | COMMERCIAL

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
15	60	185/60 R 15 C	94/92 T	C	BSW	04603440000	No	23.7	21.0	64.0	7.4 (5.5)	(5.5 - 6.0)	1475	14	875
	70	195/70 R 15 C	104/102 R	D	BSW	04603450000	No	25.7	26.0	75.0	7.9 (6.0)	(5.0 - 6.0)	1985	14	807
16	65	235/65 R 16 C	121/119 R	E	BSW	04603460000	No	28.0	37.0	93.0	9.4 (7.0)	(6.5 - 7.5)	3195	14	741
	75	195/75 R 16 C	107/105 R	D	BSW	04603430000	No	27.5	28.8	79.0	7.7 (5.5)	(5.0 - 6.0)	2150	14	755

BSW = Black Sidewall





GOVERNMENT/FLEET | ALL-SEASON | HIGH-SPEED PURSUIT


G-MAX JUSTICE



17" - 20"



50 - 60



Asymmetric

TREADWEAR	TRACTION	TEMPERATURE	SPEED
440	AA	A	V & W

Sample Vehicle Fitments Include:

- Chevrolet Caprice: 235/50ZR18
- Chevrolet Impala: 225/60R16, 235/55ZR17
- Chevrolet Tahoe: 265/60R17, 275/55R20
- Dodge Charger: 245/55R18, 225/60ZR18
- Dodge Durango: 255/60R18
- Ford Crown Victoria: 225/60R16, 235/55ZR17
- Ford Interceptor: 225/60R16, 235/55ZR17, 245/55R18, 255/60R18

Benefits

- Up to 15% longer-lasting treadwear versus the leading all-season pursuit competitor*
- Up to 15% better wet braking performance versus the leading all-season pursuit competitor*

*Based on internal test results compared to the Goodyear Eagle RS-A in the size P235/55R17 98W. On road results may vary.

G-MAX JUSTICE | Product Data

GOVERNMENT & FLEET | ALL-SEASON | HIGH-SPEED PURSUIT

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
17	55	235/55 ZR 17	99 W	SL	BSW	15553940000	Yes	27.2	27.5	51.0	9.6 (7.5)	(6.5 - 8.5)	1709	10	764
	60	265/60 R 17	108 V	SL	BSW	15553960000	Yes	29.5	35.5	51.0	10.7 (8.0)	(7.5 - 9.5)	2205	10	704
18	50	235/50 ZR 18	101 W	XL	BSW	15553930000	Yes	27.3	26.2	51.0	9.6 (7.5)	(6.5 - 8.5)	1819	10	762
	55	245/55 R 18	103 V	SL	BSW	15553950000	Yes	28.6	30.7	51.0	10.0 (7.5)	(7.0 - 8.5)	1929	10	726
	60	225/60 ZR 18	100 W	SL	BSW	15553920000	Yes	28.6	29.1	51.0	9.0 (6.5)	(6.0 - 8.0)	1764	10	726
	60	255/60 R 18	112 V	XL	BSW	04505550000	Yes	30.0	33.7	51.0	10.2 (7.5)	(7.0 - 9.0)	2469	10	691
20	55	275/55 R 20	113 V	SL	BSW	15590810000	Yes	31.9	40.9	51.0	11.2 (8.5)	(7.5 - 9.5)	2535	11	651

BSW = Black Sidewall





GOVERNMENT/FLEET | ALL-WEATHER | HIGH-SPEED PURSUIT

G-MAX JUSTICE AW

Rim Diameter	Aspect Ratio	Tread Pattern
17" - 20"	50 - 60	Symmetric

TREADWEAR	TRACTION	TEMPERATURE	SPEED
540	A	A	V

Benefits

- Up to 15% longer-lasting treadwear versus the leading all-weather pursuit competitor*
- Up to 18% better wet braking performance versus the leading all-weather pursuit competitor*
- Better winter performance versus the leading all-weather pursuit competitor**



3-Peak Mountain Snowflake
Meets the severe snow service requirements of the U.S. Tire Manufacturers Association (USTMA) and the Tire and Rubber Association of Canada (TRAC).

Sample Vehicle Fitments Include:

- Chevrolet Caprice: 235/50R18
- Chevrolet Impala: 235/55R17
- Chevrolet Tahoe: 265/60R17, 275/55R20
- Dodge Charger: 225/60R18, 245/55R18
- Dodge Durango: 255/60R18
- Ford Crown Victoria: 235/55R17
- Ford Interceptor: 235/55R17, 245/55R18, 255/60R18

*Based on internal test results compared to the Goodyear Eagle Enforcer All Weather in the size 245/55R18 103V. On road results may vary.

**Based on internal tire test results of the following key performance categories: snow handling, snow traction, ice acceleration and ice braking compared to the Goodyear Eagle Enforcer All Weather in the size 245/55R18 103V. On road results may vary.

G-MAX JUSTICE AW | Product Data

GOVERNMENT & FLEET | ALL-WEATHER | HIGH-SPEED PURSUIT

RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM) (IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32NDs)	REVS PER MILE
17	55	235/55 R 17	99 V	SL	BSW	15578210000	Yes	27.2	27.4	51.0	9.6 (7.5)	(6.5 - 8.5)	1709	10	764
	60	265/60 R 17	108 V	SL	BSW	15578230000	Yes	29.5	36.5	51.0	10.7 (8.0)	(7.5 - 9.5)	2205	11	704
18	50	235/50 R 18	101 V	XL	BSW	15578200000	Yes	27.3	27.2	51.0	9.6 (7.5)	(6.5 - 8.5)	1819	11	762
	55	245/55 R 18	103 V	SL	BSW	15578220000	Yes	28.6	30.8	51.0	10.0 (7.5)	(7.0 - 8.5)	1929	11	726
	60	225/60 R 18	100 V	SL	BSW	15578190000	Yes	28.6	29.1	51.0	9.0 (6.5)	(6.0 - 8.0)	1764	10	726
	60	255/60 R 18	112 V	XL	BSW	15578240000	Yes	30.0	32.9	51.0	10.2 (7.5)	(7.0 - 9.0)	2469	11	691
20	55	275/55 R 20	113 V	SL	BSW	15578250000	Yes	31.9	40.9	51.0	11.2 (8.5)	(7.5 - 9.5)	2535	11	651

BSW = Black Sidewall



ORIGINAL EQUIPMENT



Grabber HTS
Crossover & LT/SUV | All-Season | Touring



Grabber HTS⁶⁰
Crossover & LT/SUV | All-Season | Touring



Grabber APT
LT/SUV | All-Season | All-Terrain



Grabber A/T^x
LT/SUV | All-Season | All-Terrain



Grabber A/T^{Sport}
LT/SUV | All-Season | All-Terrain



Grabber A/T^{Sport-W}
LT/SUV | All-Weather | All-Terrain

OE PRODUCT LINE	RIM DIA (IN)	ASPECT RATIO (SERIES)	TIRE SIZE	LOAD/ SPEED INDEX	LOAD RANGE	SIDEWALL	ARTICLE NUMBER	RIM PROTECTION	TIRE DIA (IN)	TIRE WT (LBS)	MAX PSI	OVERALL SECTION WIDTH (MEASURING RIM)-(IN)	APPROVED RIM WIDTHS (IN)	MAX LOAD (LBS)	TREAD DEPTH (32 ND S)	REVS PER MILE	UTQG
-----------------------	--------------------	-----------------------------	--------------	-------------------------	---------------	----------	-------------------	-------------------	---------------------	---------------------	------------	--	-----------------------------------	----------------------	--	---------------------	------

Grabber A/T^{sport}

CHEVROLET	17	65	235/65 R 17	104 H	SL	BSW	03128630000	No	29.0	28.9	51.0	9.4 (7.0)	(6.5 - 8.5)	1984	11	716	500 A B
HONDA	18	60	245/60 R 18	105 T	SL	BSW	03128820000	No	29.6	32.7	44.0	9.8 (7.0)	(7.0 - 8.5)	2039	11	702	500 A B
		60	275/60 R 18	113 T	SL	BSW	03133220000	No	31.0	36.6	44.0	11.0 (8.0)	(7.5 - 9.5)	2535	11	670	500 A B
PORSCHE	22	40	285/40 ZR 22	(110 Y)	XL	BSW	03138050000	Yes	31.0	32.2	50.0	11.4 (10.0)	(9.5 - 11.0)	2337	9	671	240 AA A

Grabber A/T^{sport-w}

BMW	19	35	255/35 ZR 19	(96 Y)	XL	BSW	03112110000	Yes	26.0	25.7	50.0	10.2 (9.0)	(8.5 - 10.0)	1565	8	798	240 AA A
		35	275/35 ZR 19	(100 Y)	XL	BSW	03122710000	Yes	26.6	29.1	50.0	10.9 (9.5)	(9.0 - 11.0)	1764	8	782	240 AA A

Grabber A/T^x

FORD	17	70	LT265/70 R 17	112/109 T	C	BSW	04509790000	Yes	31.6	44.9	50.0	10.7 (8.0)	(7.0 - 8.5)	2470	16	657	None
	18	70	275/70 R 18	116 S	SL	BSW	04492430000	Yes	33.2	45.5	44.0	11.0 (8.0)	(7.0 - 9.0)	2756	14	627	640 A B

Grabber APT

FORD	17	70	LT265/70 R 17	112/109 S	C	BSW	15570730000	Yes	31.6	40.4	50.0	10.7 (8.0)	(7.0 - 8.5)	2470	12	657	None
	18	70	LT265/70 R 18	113/110 S	C	BSW	04492580000	Yes	32.6	43.9	50.0	10.7 (8.0)	(7.0 - 9.0)	2535	13	637	None
NISSAN	18	65	LT275/65 R 18	123/120 R	E	BSW	04507640000	Yes	32.1	53.4	80.0	11.0 (8.0)	(7.5 - 9.0)	3415	15	647	None
	70	P 275/70 R 18	116 S	SL	BSW	04492870000	No	33.2	40.3	44.0	11.0 (8.0)	(7.0 - 9.0)	2756	13	627	520 A B	

Grabber HTS

CHEVROLET	16	75	LT225/75 R 16	115/112 S	E	BSW	04501200000	No	29.3	38.7	80.0	8.8 (6.0)	(6.0 - 7.0)	2680	13	709	None
	17	70	255/70 R 17	112 S	SL	BSW	04509000000	No	31.1	33.1	44.0	10.2 (7.5)	(6.5 - 8.5)	2469	11	669	640 A B
NISSAN	18	70	265/70 R 18	116 S	SL	BSW	04492880000	No	32.6	37.8	44.0	10.7 (8.0)	(7.0 - 9.0)	2756	11	637	640 A B
	20	60	LT265/60 R 20	121/118 R	E	BSW	04503240000	Yes	32.5	53.4	80.0	10.7 (8.0)	(7.5 - 9.5)	3195	12	639	None

Grabber HTS⁶⁰

FORD	18	65	LT275/65 R 18	123/120 S	E	BSW	04490700000	Yes	32.1	47.8	80.0	11.0 (8.0)	(7.5 - 9.0)	3415	13	648	None
	65	265/65 R 18	114 T	SL	BSW	04492250000	No	31.6	35.4	44.0	10.7 (8.0)	(7.5 - 9.5)	2601	11	658	680 A B	
FORD	60	275/60 R 20	116 T	XL	BSW	04509800000	No	33.0	34.3	51.0	11.0 (8.0)	(7.5 - 9.5)	2756	10	630	620 A B	
	60	275/60 R 20	115 S	SL	BSW	04505270000	No	33.0	36.4	44.0	11.0 (8.0)	(7.5 - 9.5)	2679	11	630	620 A B	
MERCEDES-BENZ	50	275/50 R 20	113 H	XL	BSW	03143140000	Yes	30.8	40.3	51.0	11.2 (8.5)	(7.5 - 9.5)	2535	12	674	660 A A	
	45	285/45 R 22	114 H	XL	BSW	04491490000	Yes	32.1	38.0	51.0	11.2 (9.5)	(9.0 - 10.5)	2601	10	647	660 A A	
FORD	22	50	275/50 R 22	115 H	XL	BSW	04492910000	Yes	32.8	39.0	51.0	11.2 (8.5)	(7.5 - 9.5)	2679	10	633	660 A A

BSW = Black Sidewall

VEHICLE FITMENT	ARTICLE NUMBER	MARKET LINE	TIRE SIZE	YEARS SELECTED AS ORIGINAL EQUIPMENT					
BMW									
Z4	03112110000	Grabber A/T Sport-W	255/35 ZR 19	--	--	2023	2024	2025	
Z4	03122710000	Grabber A/T Sport-W	275/35 ZR 19	--	--	2023	2024	2025	
CHEVROLET									
EQUINOX	03128630000	Grabber A/T Sport	235/65 R 17	--	--	2024	2025		
EXPRESS PASSENGER	04501200000	Grabber HTS	LT225/75 R 16	2021	2022	2023	2024	2025	
SILVERADO	04509000000	Grabber HTS	255/70 R 17	2021	2022	2023	2024	2025	
FORD									
BRONCO	04509790000	Grabber A/T X	LT265/70 R 17	2021	2022	2023	2024	2025	
EXPEDITION	04491490000	Grabber HTS ⁶⁰	285/45 R 22	--	2022	2023	2024	--	
EXPEDITION	04492910000	Grabber HTS ⁶⁰	275/50 R 22	--	--	--	2024	2025	
F-150	04492430000	Grabber A/T X	275/70 R 18	--	2022	2023	2024	2025	
F-150	04492580000	Grabber APT	LT265/70 R 18	--	2022	2023	2024	2025	
F-150	04509800000	Grabber HTS ⁶⁰	275/60 R 20	--	2022	2023	--	--	
F-150	15570730000	Grabber APT	LT265/70 R 17	2021	2022	2023	2024	2025	
F250	04490700000	Grabber HTS ⁶⁰	LT275/65 R 18	--	--	--	2024	2025	
GMC									
SILVERADO	04505270000	Grabber HTS ⁶⁰		--	2022	2023	2024	2025	
HONDA									
PASSPORT	03133220000	Grabber A/T Sport	275/60 R 18	--	--	--	--	2025	
RIDGELINE	03128820000	Grabber A/T Sport	245/60 R 18	--	--	--	2024	2025	
MERCEDES-BENZ									
G-Class	03143140000	Grabber HTS ⁶⁰	275/50 R 20	--	--	--	2024	2025	
NISSAN									
TITAN	04492870000	Grabber APT	P275/70 R 18	--	2022	2023	2024	--	
TITAN	04492880000	Grabber HTS	265/70 R 18	2021	2022	2023	2024	--	
TITAN	04503240000	Grabber HTS	LT265/60 R 20	2021	2022	2023	2024	--	
TITAN	04507640000	Grabber APT	LT275/65 R 18	2021	2022	2023	2024	--	
PORSCHE									
CAYENNE	03138050000	Grabber A/T Sport	285/40 ZR 22	--	--	2023	2024	2025	
TOYOTA									
TACOMA	04492250000	Grabber HTS ⁶⁰	265/65 R 18	--	--	--	2024	2025	



DELIVERS

LIMITED WARRANTY & ADJUSTMENT POLICY



LIMITED WARRANTY & ADJUSTMENT POLICY

LIMITED WARRANTY*

Eligibility

- Purchased as replacement tires only
- Tires used on vehicle originally installed
- Owner of General Tire brand passenger, LT or special temporary spare tires

Not Covered

- Repairable punctures per USTMA guidelines
- Commercial applications
- Damage resulting from improper maintenance or operation
- Damage resulting from vehicle mechanical problems
- Any ride/vibration condition after the first 2/32nds of an inch (1.6mm) of treadwear or 12 months of service, whichever comes first
- Wear due to improper vehicle alignment
- Original Equipment Tires

Coverage

All Passenger General Tires

- Free replacement during 12 months from date of purchase OR first 2/32 treadwear (whichever comes first – mounting and balancing included)
- Pro-rated after free replacement period up to 72 months from date of purchase or wear-out (whichever comes first – mounting and balancing NOT included)

Customer Responsibility

- Responsible for all applicable taxes and local tire disposal fees
- Must have invoice with date of purchase (DOT date of manufacture will be used if invoice not available)

CUSTOMER SATISFACTION TRIAL* (45-DAY TRIAL PERIOD)

Eligibility

- Purchased as replacement tires only
- Tires used on vehicle originally installed
- Original Purchaser of a set of four (4) General Tire brand products

Not Covered

- Repairable punctures per USTMA guidelines
- Commercial applications
- Damage resulting from improper maintenance or operation
- Damage resulting from vehicle mechanical problems
- Improper mounting or demounting
- Alterations

Coverage

- Within 45 days from date of purchase return and exchange all or any one for any reason except for service related conditions
- Tires must be replaced with Continental or General Tire products
- If you are not satisfied, exchange one or more tires, or the full set, for another set of General Tire brand tires of equal or lesser value
- If exchanged for higher priced tire, customer pays the difference

Customer Responsibility

- Pays for valve stems if required
- Responsible for all applicable taxes

*Restrictions and limitations apply. See Shield+ Advantage Plan brochure for complete coverage details at <https://generaltire.com/warranty>.

MILEAGE WARRANTY*

(LIMITED TREAD WEAR-OUT COVERAGE)

Eligibility

- Purchased as replacement tires only
- Tires used on vehicle originally installed

Products

G-MAX AS⁰⁷

- 50,000 miles

AltiMAX RT⁴⁵

- 75,000 miles (T & H)
- 65,000 miles (V)

AltiMAX 365 AW

- 60,000 Miles

Grabber H/T

- 70,000 miles (Includes all Metric sizes with a speed rating of H and above)
- 65,000 miles (V)
- 50,000 miles (includes all LT sizes)

Not Covered

- Repairable punctures per USTMA guidelines
- Commercial applications
- Damage resulting from improper maintenance or operation
- Damage resulting from vehicle mechanical problems
- Tires not rotated every 6,000 - 8,000 miles
- Tires in service more than 72 months

Coverage

- Pro-rated replacement for wearout during mileage coverage OR 72 months of service (whichever comes first)
- Mounting and balancing NOT included
- Pro-rated price = (mileage received/mileage covered) x dealer selling price = customer price
- Mileage Warranty for the rear axle of split fitments will be 50% of the standard tread wearout coverage

Customer Responsibility

- Must have original, up-to-date copy of the Tread Wearout Coverage Rotation Schedule (printed in Limited Warranty Brochure) showing rotation intervals and odometer reading at installation and wear-out
- Must have original sales invoice with date of purchase
- Pays for mounting, balancing, and all applicable taxes and local tire disposal fees

ROAD HAZARD COVERAGE*

Eligibility

- Purchased as replacement tires only
- Original purchaser
- Used on the vehicle originally installed

Products

- All General Tire brand tires

Coverage

- Free comparable replacement tire during the first 12 months, OR first 2/32nds of an inch (1.6 mm) of treadwear (whichever comes first)

Not Covered

- Commercial applications
- Improper repair
- Damage resulting from improper maintenance or operation
- Damage resulting from vehicle mechanical problems
- Damage resulting from misuse and abusive driving
- Alterations
- Improper mounting or demounting
- Any repairable condition per USTMA guidelines

Customer Responsibility

- Return to the place of purchase or to an authorized General Tire dealer
- Present the tire(s)
- Present original sales receipt showing the date of purchase
 - If unavailable, DOT tire identification number and date of manufacture will be used
- Replace within the same brand, invoice required

Attention authorized dealers, include the following with the claim submission

- Eligible tire(s)
- Original purchase invoice
- Proof-of-purchase showing the purchase of another General Tire brand tire(s)
- The reason for removal

FOR MORE INFORMATION

For more limited warranty and adjustment policy and safety and maintenance information we encourage you to visit our website at www.GeneralTire.com (customer care link).

For additional safety and maintenance information, please also visit the U.S. Tire Manufacturers Association (USTMA) website at www.ustires.org.

To order physical copies of our warranty brochures please login to the ContiLink (www.ContiLink.com) or ContiCarLink (www.ContiCarLink.com) to access the Dealer Marketing Suite.

Inside Sales: 1-800-321-7575

Consumer Relations: 1-800-847-3349

*Restrictions and limitations apply. See Shield+ Advantage Plan brochure for complete coverage details at <https://generaltire.com/warranty>.

PASSENGER TIRE AND LIGHT TRUCK

DEPTH CONVERSION TABLE TO PERCENTAGE OF WEAR

All numbers to the right designate the percentage of usable tread remaining, used to determine credit due to customer toward the purchase of a replacement tire. The numbers to the left designate the percentage of usable tread worn, to determine customer's charge for a replacement tire.

To obtain the remaining tread depth, take three (3) measurements on the tire, one on the inner groove, one on the center and one in the outer groove and then average the three (3) measurements. Locate (below) the tire's original tread depth. Read down and across matching the tire's measured remaining tread depth. Use the percentages shown as a charge and/or credit towards the purchase of a replacement tire.

TREADWEAR CONVERSION TABLE

TREAD DEPTHS IN 32NDS	ORIGINAL TIRE TREAD																			
	9/32	10/32	11/32	12/32	13/32	14/32	15/32	16/32	17/32	18/32	19/32	20/32	21/32	22/32	23/32	24/32	25/32	26/32	27/32	28/32
2/32	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	100%/0	
3/32	86%/14	88%/12	89%/11	90%/10	91%/9	92%/8	92%/8	93%/7	93%/7	94%/6	94%/6	94%/6	95%/5	95%/5	95%/5	95%/5	96%/4	96%/4	96%/4	96%/4
4/32	71%/29	75%/25	78%/22	80%/20	82%/18	83%/17	85%/15	86%/14	87%/13	88%/12	88%/12	89%/11	89%/11	90%/10	90%/10	91%/9	91%/9	92%/8	92%/8	92%/8
5/32	57%/43	63%/37	67%/33	70%/30	73%/27	75%/25	77%/23	79%/21	80%/20	81%/19	82%/18	83%/17	84%/16	85%/15	86%/14	86%/14	87%/13	88%/12	88%/12	88%/12
6/32	43%/57	50%/50	56%/44	60%/40	64%/36	67%/33	69%/31	71%/29	73%/27	75%/25	76%/24	78%/22	79%/21	80%/20	81%/19	82%/18	83%/17	83%/17	84%/16	85%/15
7/32	29%/71	38%/62	44%/56	50%/50	55%/45	58%/42	62%/38	64%/36	67%/33	69%/31	71%/29	72%/28	74%/26	75%/25	76%/24	77%/23	78%/22	79%/21	80%/20	81%/19
8/32	14%/86	25%/75	33%/67	40%/60	45%/55	50%/50	54%/46	57%/43	60%/40	63%/37	65%/35	67%/33	68%/32	70%/30	71%/29	73%/27	74%/26	75%/25	76%/24	77%/23
9/32	0%/100	13%/87	22%/78	30%/70	36%/64	42%/58	46%/54	50%/50	53%/47	56%/44	59%/41	61%/39	63%/37	65%/35	67%/33	68%/32	70%/30	71%/29	72%/28	73%/27
10/32		0%/100	11%/89	20%/80	27%/73	33%/67	38%/62	43%/57	47%/53	50%/50	53%/47	56%/44	58%/42	60%/40	62%/38	64%/36	65%/35	67%/33	68%/32	69%/31
11/32			0%/100	10%/90	18%/82	25%/75	31%/69	36%/64	40%/60	44%/56	47%/53	50%/50	53%/47	55%/45	57%/43	59%/41	61%/39	62%/38	64%/36	65%/35
12/32				0%/100	9%/91	17%/83	23%/77	29%/71	33%/67	37%/63	41%/59	44%/56	47%/53	50%/50	52%/48	55%/45	57%/43	58%/42	60%/40	62%/38
13/32					0%/100	8%/92	15%/85	21%/79	27%/73	31%/69	35%/65	39%/61	42%/58	45%/55	48%/52	50%/50	52%/48	54%/46	56%/44	58%/42
14/32						0%/100	8%/92	14%/86	20%/80	25%/75	29%/71	33%/67	37%/63	40%/60	43%/57	45%/55	48%/52	50%/50	52%/48	54%/46
15/32							0%/100	7%/93	13%/87	19%/81	24%/76	28%/72	32%/68	35%/65	38%/63	41%/59	43%/57	46%/54	48%/52	50%/50
16/32								0%/100	7%/93	12%/88	18%/82	22%/78	26%/74	30%/70	33%/67	36%/64	39%/61	42%/58	44%/56	46%/54
17/32									0%/100	6%/94	12%/88	17%/83	21%/79	25%/75	29%/71	32%/68	35%/65	38%/62	40%/60	42%/58
18/32										0%/100	6%/94	11%/89	16%/84	20%/80	24%/76	27%/73	30%/70	33%/67	36%/64	38%/62
19/32											0%/100	6%/94	11%/89	15%/85	19%/81	23%/77	26%/74	29%/71	32%/68	35%/65
20/32												0%/100	5%/95	10%/90	14%/86	18%/82	22%/78	25%/75	28%/72	31%/69
21/32													0%/100	5%/95	10%/90	14%/86	17%/83	21%/79	24%/76	27%/73
22/32														0%/100	5%/95	9%/91	13%/87	17%/83	20%/80	23%/77
23/32															0%/100	5%/95	9%/91	12%/88	16%/84	19%/81
24/32																0%/100	4%/96	8%/92	12%/88	15%/85
25/32																	0%/100	4%/96	8%/92	12%/88
26/32																		0%/100	4%/96	8%/92
27/32																			0%/100	4%/96
28/32																				0%/100



Dot shows an example of where to take measurements. It is NOT recommended to measure straight across in one location.

AFTER THE SALE, DID YOU COMPLETE YOUR OBLIGATION UNDER THE LAW?

The National Highway Traffic Safety Administration (NHTSA) regulates the use of tire registration forms by tire manufacturers and tire dealers/distributors, 49 CFR 574, ET SEQ. Tire manufacturers are required to provide tire registration forms to its tire dealers/distributors. Tire dealers/distributors who sell directly to consumers are required to provide tire registration forms to consumers at the time of sale. Tire dealers/distributors are also required to supply tire registration forms to other dealers for resale (or "resellers").

When completing and mailing the tire registration forms, it is very important that you list all the information completely and accurately for the reasons stated above. Please fill out the shaded areas of the tire registration form (see example below) and include the name of the dealer/distributor, address, quantity of tires sold, and the complete D.O.T. Tire Identification Number for the tire(s) sold. If you assist the consumer in completing and mailing the registration forms, list his or her full name, complete address section, apply sufficient postage and mail. You may also register your tires online by visiting our website at WWW.GENERALTIRE.COM (U.S.) or WWW.GENERALTIRE.CA (Canada) and clicking on the "Tire Registration" link.

If you do not complete and mail the registration form for the customer, please fill out the shaded areas of the tire registration form (see example below) and include the name of the dealer/distributor, address, quantity of tires sold, and the complete D.O.T. Tire Identification Number for the tire(s) sold. Then the customer enters his or her name and address on the form, apply postage and mail the form.

Penalties

Failure to comply with these requirements may result in civil penalties of \$5,000 for each violation and up to a maximum of \$15,000,000.

You may contact our Customer Relations Department at 1-800-847-3349 (in the US) or 1-855-453-1962 (in Canada). If you have questions about tire registration.

Remember, complete your obligations under the law.

IMPORTANT!

In case of a recall, we can reach you only if we have your name and address. You MUST send in this card to be on our recall list.

DO IT TODAY!

Date of Sale / /

CUSTOMER'S NAME (Please print)

CUSTOMER'S ADDRESS

CITY	STATE/PROVINCE	ZIP/POSTAL CODE
------	----------------	-----------------

SELLER COMPLETE (Can be Rubber Stamped)

SELLER'S NAME

SELLER'S ADDRESS

CITY	STATE/PROVINCE	ZIP/POSTAL CODE
------	----------------	-----------------

OMB Approved OMB No. 2127-0050
Shaded Areas Must Be Filled In By Seller

Register ONI Y tire brand checked ✓ below

Continental Tire

General Tire


SELLER COMPLETE

Federal law restricts above information provided to be used for tire recall purposes only!

NOTES

GENERAL TIRE 

DELIVERS



WWW.GENERALTIRE.COM

CONTINENTAL TIRE THE AMERICAS, LLC

PO Box 5000, Fort Mill, SC 29716

Inside Sales: 1.800.321.7575 | Consumer Relations: 1.800.847.3349