
GOODYEAR® COMMERCIAL TIRE PRODUCT APPLICATION GUIDE







REGIONAL/URBAN

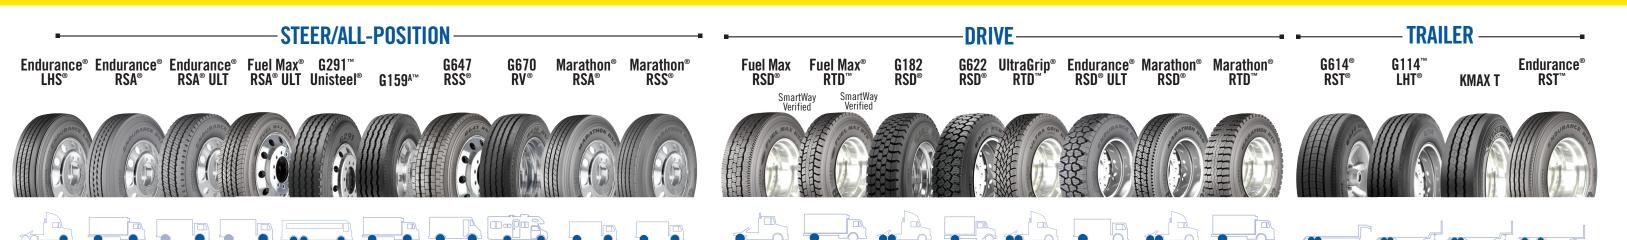

MIXED SERVICE



*Available with or without DuraSeal Technology®

Optional 🔵



LONG HAUL						
	TREAD	SIZE	LOAD RANGE	FUEL EFFICIENCY LEVEL	TREAD DEPTH (IN 32NDS)	
		11R22.5	G, H	SmartWay® & GHG 2	18	
Steer/All-Position		295/75R22.5	G, H	SmartWay & GHG 2	18	
	Endurance® LHS®	11R24.5	G, H	Both Smartway, LR H Only GHG2	18	
		285/75R24.5	G, H	Both Smartway, LR H Only GHG2	18	
		11R22.5	G, H	SmartWay	18	
	Marathon® LHS®	295/75R22.5	G, H	SmartWay	18	
	Matation, ru2,	11R24.5	G, H	SmartWay	18	
		285/75R24.5	G	SmartWay	18	
		11R22.5	G, H	SmartWay	30	
	Endurance® LHD®	295/75R22.5	G	SmartWay & GHG 2	30	
	Fudurance, THD,	11R24.5	G, H	SmartWay	30	
		285/75R24.5	G	SmartWay	30	
	G572 1AD® Fuel Max®	11R22.5	G	SmartWay & GHG 2	24	
		295/75R22.5	G	SmartWay & GHG 2	24	
Drive	Fuel Max LHD® 2	11R22.5	G	SmartWay & GHG 2	24	
		295/75R22.5	G	SmartWay & GHG 2	24	
	Fuel Max SSD® DuraSeal™	445/50R22.5	L,	SmartWay & GHG 2	24	
		11R22.5	G	SmartWay	24	
	Marathon® LHD®	295/75R22.5	G	SmartWay	24	
	Marathons Ends	11R24.5	G, H	SmartWay	24	
		285/75R24.5	G	SmartWay	24	
	Fuel Max® LHT®	295/75R22.5	G	SmartWay	12	
	Fuel Max SST® DuraSeal™	445/50R22.5	L	SmartWay	12	
		11R22.5	G	SmartWay	12	
		255/70R22.5	Н	SmartWay	13	
	G316® LHT™ Fuel Max™	275/70R22.5	J	SmartWay	14	
	G310, FULL LUGLIMAX	295/75R22.5	G	SmartWay	12	
Trailer		11R24.5	G	SmartWay	12	
II allel		285/75R24.5	G	SmartWay	12	
	G316® LHT™ Fuel Max™ Du-	11R22.5	G	SmartWay	12	
	raSeal	295/75R22.5	G	SmartWay	12	
		11R22.5	G	SmartWay	12	
	Marathon® LHT®	295/75R22.5	G	SmartWay	12	
	INIGI GLIIVII - LTII -	11R24.5	G	SmartWay	12	
		285/75R24.5	G	SmartWay	12	

NEGIUNAL/	REGIONAL/URBAN							
	TREAD	SIZE	LOAD RANGE	FUEL EFFICIENCY LEVEL	TREAD DEPTH (IN 32NDS			
		11R22.5	G, H	SmartWay & GHG 2	18			
	Endurance LHS	295/75R22.5	G, H	SmartWay & GHG 2	18			
	Endurance Ene	11R24.5	G, H	Both Smartway, LR H Only GHG2	18			
		285/75R24.5	G, H	Both Smartway, LR H Only GHG2	18			
		225/70R19.5 245/70R19.5	G	GHG 2 GHG 2	17 18			
		10R22.5	G	GHG 2	21			
		11R22.5	G,H	GHG	22			
		12R22.5	H	GHG 2	22			
	Endurance® RSA®	245/75R22.5	G	GHG	19			
		255/70R22.5	Н	GHG 2	18			
		265/75R22.5	G	GHG	20			
		275/70R22.5	J	GHG 2	19			
		295/75R22.5	G	GHG	22			
		11R24.5	G,H	GHG	22			
		LT215/85R16	E	-	14			
	Endurance® RSA® ULT	LT225/75R16	E	-	14			
		LT245/75R16	E	-	15			
	Fuel Max® RSA® ULT	225/70R19.5 245/70R19.5	G H	GHG 2 GHG 2	16 16			
	G291™ Unisteel®	315/80R22.5	J,L	GHG 2	18			
	G159 ^{A™}	265/70R19.5	G	GHG 2	16			
	d133	8R19.5	F	unu z	13			
teer/All-Position	G647 RSS®	225/70R19.5	F,G	_	16			
		245/70R19.5	G	GHG	16			
		225/70R19.5	F	GHG	13			
		245/70R19.5	G	GHG	13			
		245/75R22.5	G	GHG	14			
		255/70R22.5	Н	GHG	14			
	G670 RV®	265/75R22.5	G	GHG	14			
		275/70R22.5	Н	GHG	14			
		275/80R22.5	Н	GHG	18			
		295/80R22.5 315/80R22.5	H L	GHG —	16 16			
		10R22.5	G	_	21			
		11R22.5	H	_	22			
		12R22.5	H	_	22			
	Marathon® RSA®	255/70R22.5	H	_	18			
		295/75R22.5	G	_	22			
		11R24.5	Н	-	22			
		285/75R24.5	G	_	22			
		11R22.5	Н	-	18			
		255/70R22.5	Н	-	15			
	Marathon® RSS®	295/75R22.5	G	-	18			
		11R24.5	Н	-	18			
		285/75R24.5 11R22.5	G	_ SmartWay	17 24			
	Fuel Max® RSD®	11R22.5	H	SmartWay	24			
	Tuer Max 1130	295/75R22.5	G	SmartWay	24			
		225/70R19.5	G	GHG 2	18			
		245/70R19.5	Н	GHG 2	19			
	Fuel Max® RTD™	11R22.5	G,H	SmartWay & GHG 2	27			
		255/70R22.5	Н	GHG 2	25			
		295/75R22.5	G	SmartWay & GHG 2	27			
		11R22.5	G,H	_	28			
	G182 RSD®	12R22.5	Н	-	28			
	220200	295/75R22.5	G	-	28			
		11R24.5	G,H	_	28			
		225/70R19.5 245/70R19.5	F,G		19			
		10R22.5	G	_	20			
		11R22.5	G,H	_	26			
Drive	0000 000 -	12R22.5	Н	_	26			
	G622 RSD®	245/75R22.5	G	-	23			
		255/70R22.5	Н	-	23			
		265/75R22.5	G	-	23			
		295/75R22.5	G	-	26			
		11R24.5	G	-	26			
	UltraGrip® RTD™	11R22.5	G,H	-	25			
	Endurance® DCD® III T	LT215/85R16	E	_	16			
	Endurance® RSD® ULT	LT225/75R16 LT245/75R16	E E		16 16			
		11R22.5	H	_	28			
		295/75R22.5	G	_	28			
	Marathon® RSD®	11R24.5	Н	_	28			
		285/75R24.5	G	_	28			
	Marathan® DTD™	11R22.5	Н	-	27			
	Marathon® RTD™	295/75R22.5	Н	-	28			
	G614® RST®	LT235/85R16	G	-	12			
	G114™ LHT®	10R17.5	Н	-	14			
	OTTA FULL	215/75R17.5	Н	-	16			
_	KMax T	235/75R17.5	J	-	14			
Trailer	Tunux I	245/70R17.5	J	-	14			
		11R22.5	H	_	18			
	ENDURANCE RST®	295/75R22.5	Н	_	18			
		11R24.5 285/75R24.5	H	_	18			
		203//31\24.3	п	_	18			

MIXED SEF	TREAD	SIZE	LOAD RANGE	FUEL EFFICIENCY LEVEL	TREAD DEPTH (IN 3
	Endurance® WHA®	315/80R22.5	LUAD KANGE	GHG 2	24
	Endurance® WHA® DuraSeal™	315/80R22.5	L	GHG 2	24
	G289® WHA®	315/80R22.5	L	GHG	24
	G289® WHA® DuraSeal™	315/80R22.5	L	GHG	24
	GZOJ- WHA- DUI aSeal	11R22.5	Н	GHG	24
	G731™ MSA	12R22.5	Н	GHG	24
	G/31 W3A		H		24
	C721™ MCA DuraCaal	11R24.5		GHG	
	G731™ MSA DuraSeal	11R22.5	Н	GHG	24
		11R22.5	Н	GHG	24
	O7F1TM MACA	12R22.5	Н	GHG	24
	G751™ MSA	315/80R22.5	L	GHG	24
All-Position		11R24.5	H	GHG	24
		12R24.5	Н	-	24
	G751™ MSA DuraSeal	11R22.5	H	GHG	24
		315/80R22.5	L	GHG	24
	0000 11010	255/70R22.5	Н	GHG	22
	G288 MSA®	275/70R22.5	Н	GHG	23
		12.00R24	J	GHG	25
	G288 MSA® DuraSeal	11R24.5	Н	GHG	25
		11R22.5	Н	GHG	22
	Workhorse® MSA	315/80R22.5	L	GHG	23
		11R24.5	Н	GHG	22
		12R22.5	Н	GHG	22
		12R24.5	Н	GHG	22
		11R22.5	Н	-	28
	G282 MSD®	12R22.5	Н	-	28
		11R24.5	Н	-	28
	Armor Max®	11R22.5	Н	GHG 2	32
	Pro Grade MSD®	12R22.5	Н	GHG 2	33
		11R24.5	Н	GHG 2	32
	Armor Max®	11R22.5	Н	GHG 2	32
	Pro Grade MSD® DuraSeal	11R24.5	Н	GHG 2	32
Drive		11.00R20	Н	-	33
51110	G177 Unisteel®	12.00R24	J	-	40
	diff dilisteel	12.00R24 OTR	J	-	40
		12R24.5	Н	-	33
	G741® MSD®	11R22.5	Н	-	33
	U/41 MOD	11R24.5	Н	-	33
	G971™ Armor Max®	LT215/85R16	E	_	17
	d3/1 Aillioi wax	LT235/85R16	E	-	18
	Workhorse® MSD®	11R22.5	Н	-	31
	WOLKHOLSE MISD	11R24.5	Н	_	31
	ArmorMax® MSA	425/65R22.5	L	GHG 2	23
	ArmorMax® MSA DuraSeal™	425/65R22.5	L	GHG 2	23
		385/65R22.5	J	GHG 2	23
	G296® MSA	425/65R22.5	L	GHG 2	23
		445/65R22.5	L	GHG 2	23
Super Single	G296® MSA DuraSeal™	425/65R22.5	L	GHG 2	23
Super Single	G296® WHA®	425/65R22.5	L	GHG	23
	G296® WHA® DuraSeal™	425/65R22.5	L	GHG	23
		385/65R22.5	J	GHG 2	30
	G278 MSD®	425/65R22.5	L	GHG 2	30
		445/65R22.5	L	GHG 2	30







2021 NEW PRODUCTS - COMMERCIAL TRUCK

LONG HAUL

FUEL MAX® LHD® 2

LONG HAUL DRIVE

GOODYEAR'S BEST PREMIUM LONG HAUL DRIVE TIRE FOR **FUEL EFFICIENCY**







MIXED SERVICE

ARMOR MAX® MSA®

GOODYEAR'S BEST PREMIUM MIXED SERVICE ALL-POSITION TIRE FOR **EXTREME SERVICE APPLICATIONS**



REGIONAL/URBAN

FUEL MAX® RSD®

REGIONAL SERVICE DRIVE

GOODYEAR'S BEST PREMIUM SUPER-REGIONAL, SINGLE-AXLE **DRIVE TIRE WITH DEEP TRACTION** FEATURES AND SMARTWAY **FUEL EFFICIENCY**





UNICIRCLE® FUEL MAX® RSD®

REGIONAL SERVICE DRIVE

GOODYEAR'S BEST PREMIUM SUPER-REGIONAL, SINGLE-AXLE DRIVE UNICIRCLE RETREAD WITH DEEP TRACTION FEATURES AND SMARTWAY FUEL EFFICIENCY





FUEL MAX® RSA® ULT

REGIONAL STEER/ALL-POSITION

GOODYEAR'S BEST PREMIUM 19.5" REGIONAL/URBAN ALL-POSITION TIRE BALANCING TRACTION, **FUEL EFFICIENCY AND MILEAGE**



M + S



UNICIRCLE FUEL MAX® RTD

REGIONAL TRACTION DRIVE

GOODYEAR'S BEST PREMIUM UNICIRCLE DRIVE RETREAD OPEN-SHOULDER REGIONAL DRIVE TIRE **BALANCING TRACTION, FUEL AND** LONG MILES TO REMOVAL



SmartWay





ENDURANCE RSA ULT 17.5"

REGIONAL STEER/ALL-POSITION

GOODYEAR'S BEST 17.5" ALL-**POSITION TIRE FOR PICKUP AND DELIVERY FLEETS FEATURING ENHANCED TOUGHNESS. TRACTION** AND LONG MILES TO REMOVAL





UNICIRCLE ULTRAGRIP® RTD

REGIONAL TRACTION DRIVE

GOODYEAR'S BEST PREMIUM ALL-SEASON REGIONAL UNICIRCLE DRIVE RETREAD FOR TRACTION AND GRIP









2021 NEW TIRES AND RETREADS

AVAILABLE SIZES AND LOAD RANGES

LONG HAUL

FUEL MAX® LHD®2

TIRE SIZE	LOAD RANGE	TREAD DEPTH	ESTIMATED LAUNCH	
TIRE SIZE	LUAD RANGE	32NDS	ESTIMATED LAUNCH	
11R22.5	G	24	Q2 2021	
295/75R22.5	G	24	Q1 2021	

MIXED SERVICE

ARMOR MAX® MSA® DURASEAL

TIRE SIZE	LOAD RANGE	TREAD DEPTH	ESTIMATED LAUNCH	
TIRE SIZE	LUAD RANGE	32NDS	ESTIMATED LAUNCH	
11R22.5	Н	24	Q1 2022	
315/80R22.5	L	24	Q1 2022	
425/65R22.5	L	23	Q2 2021	
11R24.5	Н	24	Q1 2022	

ARMOR MAX® MSA®

TIRE SIZE	LOAD RANGE	TREAD DEPTH 32NDS	ESTIMATED LAUNCH
	TUBELESS TIRES ON 1	5° DROP CENTER RIMS	
11R22.5	Н	24	Q1 2022
12R22.5	Н	24	Q1 2022
255/70R22.5	Н	22	Q1 2022
275/70R22.5	Н	23	Q1 2022
385/65R22.5	J	23	Q1 2022
425/65R22.5	L	23	Q2 2021
445/65R22.5	L	23	Q1 2022

REGIONAL AND URBAN

FUEL MAX® RSD®

TIRE SIZE	LOAD RANGE	TREAD DEPTH	ESTIMATED LAUNCH		
TIRE SIZE	LUAD RANGE	32NDS	ESTIMATED LAUNGII		
	TUBELESS TIRES ON 15° DROP CENTER RIMS				
11R22.5	G	24	2022		
11R22.5	Н	24	2022		
295/75R22.5	G	24	Q3 2021		

FUEL MAX® RSA® ULT

TIRE SIZE	LOAD RANGE	TREAD DEPTH	ESTIMATED LAUNCH		
TIRE SIZE	LUAD RANGE	32NDS	ESTIMATED LAUNCH		
TUBELESS TIRES ON 15° DROP CENTER RIMS					
225/70R19.5	G	16	Q1 2021		
245/70R19.5	Н	16	Q2 2021		

ENDURANCE® RSA® ULT 17.5"

TIRE SIZE	LOAD RANGE	TREAD DEPTH	ESTIMATED LAUNCH		
TIRE SIZE	LUAD RANGE	32NDS	ESTIMATED LAUNCH		
TUBELESS TIRES ON 15° DROP CENTER RIMS					
215/75R17.5	G	18	Q2 2021		
235/75R17.5	Н	18	Q4 2021		
-					

UNICIRCLE® FUEL MAX® RSD®

DETREAD OLDE	AVAILAB	AVAILABLE WIDTH TREAD DEPTH		FOTHERTED LAUNOU
RETREAD SIZE	IN	MM	32NDS	ESTIMATED LAUNCH
11R22.5	81/2, 81/8	215, 225	22	Q2 2021
295/75R22.5	8 %, 9 ¼, 9 %	225, 235, 245	22	Q2 2021

UNICIRCLE FUEL MAX® RTD®

	RETREAD SIZE	AVAILABI	AVAILABLE WIDTH		ESTIMATED LAUNCH
	KETKEAU SIZE	IN	MM	32NDS	ESTIMATED LAUNCH
Ξ	11R22.5	81/2, 81/8, 91/4	215, 225, 235	24	Q2 2021
	295/75R22.5	81/2, 81/8, 91/4, 95/8	215, 225, 235, 245	24	Q2 2021

UNICIRCLE ULTRAGRIP® RTD®

RETREAD SIZE	AVAILAB	LE WIDTH	TREAD DEPTH	ESTIMATED LAUNCH	
KETKEAD SIZE	IN	MM	32NDS	ESTIMATED LAUNCH	
11R22.5	8 1/2, 8 7/8, 9 1/4	215, 225, 235	25	Q3 2021	
11R24.5	8 1/2, 8 1/8, 9 1/4	215, 225, 235	25	Q3 2021	

TOTAL MOBILITY








goodyeartrucktires.com



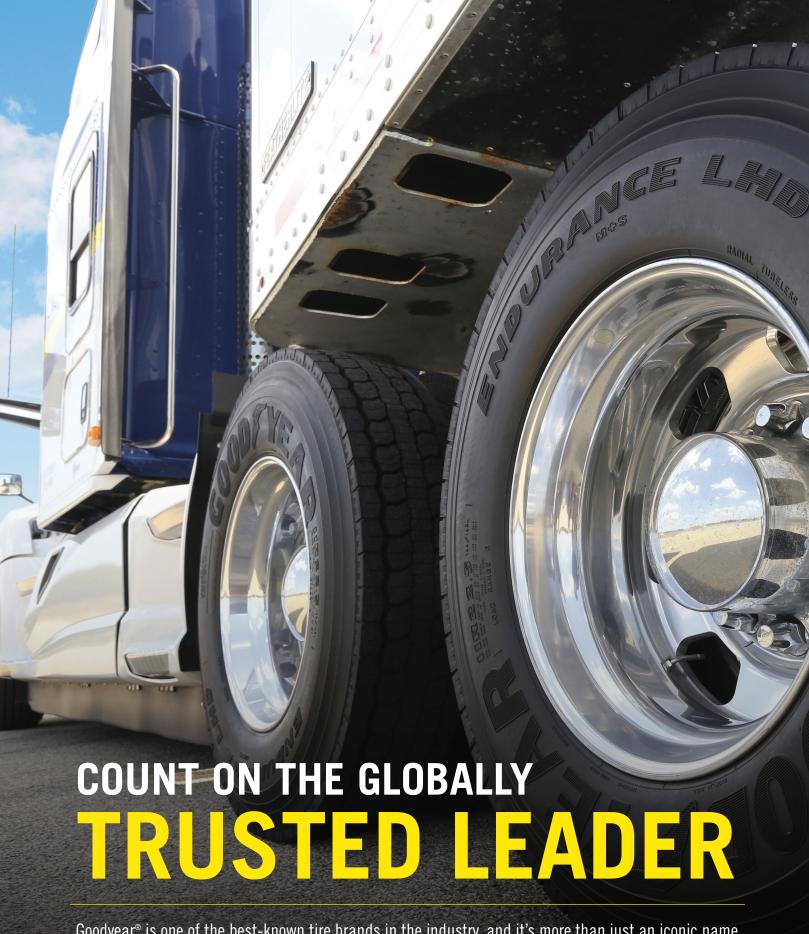

Goodyear® is one of the best-known tire brands in the industry, and it's more than just an iconic name. It's a brand that stands for reliability, integrity and innovation — a brand that continues to earn the trust of customers again and again.



LEADERS IN INNOVATION

Goodyear's broad experience drives progress across a variety of applications, including consumer, commercial, off-the-road (OTR), aviation and racing tires.

119+ YEARS

of continual innovation

90+ YEARS

of driving retread quality

2,600+
ENGINEERS & SCIENTISTS

around the globe

37
MANUFACTURING PLANTS

with offices in almost every country

PREFERRED BY FLEETS

91%

of fleet customers are satisfied with Goodyear*

86%

of fleet customers would recommend Goodyear tires*

TOTAL MOBILITY



TRUSTED PRODUCTS

Innovative products
for any fleet application
Features innovative
technologies like DuraSeal™,
Fuel Max® and UniCircle®



PREMIER SERVICE NETWORK

2,300+ locations throughout North America ready to help your fleet

Consistent, efficient service with every visit



COMPLETE TIRE MANAGEMENT

Real-time tire monitoring, intelligent analysis and customized reporting


All in the name of optimizing your fleet, your budget and your time





TIRES AND RETREADS THAT HELP DRIVE FLEET SAVINGS

Having the right products is the only way to give any fleet Total Mobility. Goodyear® offers a wide selection of innovative tires that feature advanced technologies to help fleets of any size and application reduce their operating costs.

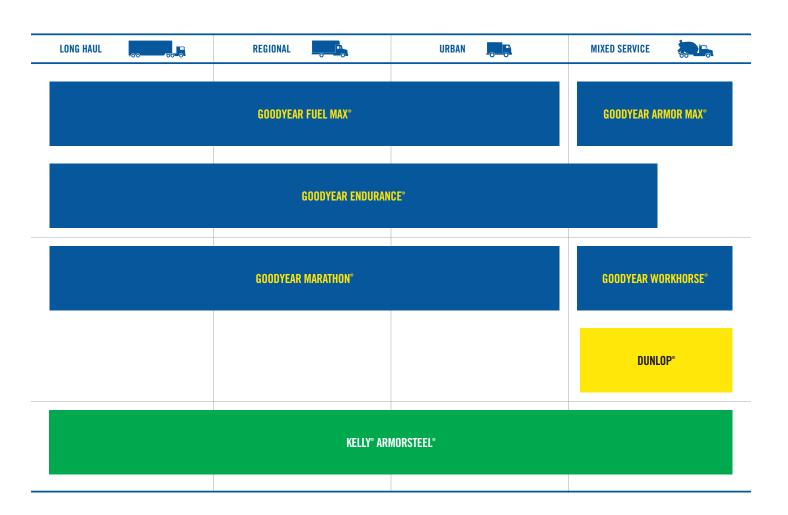



A GOODYEAR DEALER NETWORK THAT'S BUILT AROUND YOU

With more than 2,300 locations and industry-leading roadside service, Goodyear Commercial Tire & Service Centers and Network Dealers are always nearby to give you a helping hand. We have the experience, knowledge and services to help keep your equipment up and running.

PROFESSIONAL FLEET SERVICES

Goodyear Commercial Tire & Service Network members use state-of-the-art service equipment, and our trained technicians adhere to the Tire Industry Association CTS 200 level for high-quality service at any location.

- 24-hour emergency road service
- 2-hour target roll time
- Sustainable and cost-saving retreading for commercial and off-the-road tire casings
- Fleet survey to enhance tire longevity and performance
- Tire performance monitoring for both commercial and off-the-road tires

THE FLEETHQ™2GO APP

Instantly connects drivers to 24/7 roadside service in a couple quick taps of a screen.









LET GOODYEAR® LEAD THE WAY

Get real-time tire monitoring, intelligent analysis and customized solutions, all in the name of optimizing your fleet, your budget and your time.



TIRE MONITORING

INSIGHTS AND ANALYSIS

SERVICE ACTIVATION



TIRE MONITORING — STAYING AHEAD OF THE GAME

Digital inspections

Automated inspections

Real-time active monitoring



INSIGHTS AND ANALYSIS — DATA IS THE NEW STREET SMARTS

All data is transmitted to the Goodyear Mobility Cloud $^{\mathsf{TM}}$

Custom tire insights based on your unique specifications

Reporting and alerts to help you proactively manage critical tire data on your terms



SERVICE ACTIVATION — ALWAYS BY YOUR SIDE

24/7 industry-leading roadside assistance

2,300+ Goodyear Commercial Tire & Service Network Locations

Service coordination through Goodyear Fleet HQ™

Insights to help intelligently direct labor



TIRE MANAGEMENT TOOLS EXCLUSIVELY FROM GOODYEAR

Proper fleet tire management is about more than putting the right tires on the right vehicles. Using industry-exclusive tire monitoring tools, Goodyear analyzes real-time tire data, alerts fleets with valuable insights and delivers timely service to minimize tire costs down and maximize vehicle uptime.

GOODYEAR TIRE OPTIX™

This digital inspection toolset enables you to capture data accurately and efficiently with instant results.

GOODYEAR TPMS PLUS™

TPMS Plus is a connected, active monitoring system that goes beyond the benefits of traditional dashboard monitoring. Using Goodyear's unique, fleet-specific algorithms, TPMS Plus helps identify critical issues, inflation trends and much more, allowing you to be proactive instead of reactive.

GOODYEAR CHECKPOINT™ — DRIVE-OVER READER

Goodyear CheckPoint provides automated inspections of tire pressure and tread depth. Ideal for high-volume yards, this solution enables large quantities of vehicles to be inspected and offers a frequently updated snapshot of tire health.



GOODYEAR® INNOVATIONS TO HELP REDUCE COST



FUEL MAX® TECHNOLOGY

Goodyear tires with Fuel Max Technology can help fleets save money on one of their largest operating costs — fuel. Featuring innovative fuel-saving compounds, tire constructions and tread designs, Fuel Max tires help reduce rolling resistance in every wheel position.



DURASEAL TECHNOLOGY®

The world's first built-in tire sealant for commercial truck tires, DuraSeal Technology helps reduce downtime and costly repairs by keeping trucks moving in the face of nails, screws and other sharp objects. Tires with DuraSeal Technology instantly seal punctures up to ¼" in the face of the tread* to help keep hardworking fleets moving.

*Seals up to 1/4-inch tread punctures only. Does not seal sidewall punctures.



UNICIRCLE® RETREAD TECHNOLOGY

Goodyear can help extend the life cycle of tires with innovative, spliceless UniCircle retreads. Installed with no cutting, UniCircle retreads are uniform and balanced and help fleets get long miles to removal.

		•		,		LONG HAUL T	IRES		•			
	POSITION	STE All-Po	ER/ Isition			DRIVE				TRA	ILER	
		PAGE 12	PAGE 13	PAGE 14	PAGE 15	PAGE 16	PAGE 17	PAGE 18	PAGE 20	PAGE 21	PAGE 22	PAGE 23
	TIRE	ENDURANCE® LHS®	MARATHON® LHS®	ENDURANCE® LHD®	G572 1AD® FUEL MAX®	FUEL MAX® LHD®2	FUEL MAX SSD® DURASEAL™	MARATHON® LHD®	FUEL MAX® LHT®	FUEL MAX SST® DURASEAL"	G316® LHT™ FUEL MAX™ DURASEAL	MARATHON® LHT®
	11R22.5	G, H - 18	G, H - 18	G, H - 30	G - 24	G - 24		G - 24			G - 12	G - 12
ESS	255/70R22.5										H - 13	
TUBELESS	275/70R22.5										J - 14	
100	295/75R22.5	G, H - 18	G, H - 18	G - 30	G - 24	G - 24		G - 24	G - 12		G - 12	G - 12
TRUCK-	445/50R22.5						L - 24			L - 12		
E	11R24.5	G, H - 18	G, H - 18	G, H - 30				G, H - 24			G - 12	G - 12
	285/75R24.5	G, H - 18	G - 18	G - 30				G - 24			G - 12	G - 12

NOTE: The letters in the chart represent load ranges. The numbers represent tread depth based on 32nds of an inch.

		LONG HAUL	. UNICIRCLE PRI	EMIUM RETREAD	S										
POSITION	DRIVE – Wide Base	DR	IVE	TRAILER – Wide Base	TRAILER										
	PAGE 24	PAGE 25	PAGE 25	PAGE 27	PAGE 28	PAGE 28	PAGE 28								
TIRE	G392°, SSD™ FUEL MAX™	ENDURANCE® LHD®	6362""	G394^ SST® FUEL MAX™	FUEL MAX® LHT®	G316 AT FUEL MAX™	6314								
11R22.5		26	22			12	12								
295/75R22.5		26	22		11	12	12								
445/50R22.5	24			12											
11R24.5		26	22				12								


NOTE: The numbers in the chart represent tread depth based on 32nds of an inch.

				LONG	HAUL PRECURE	RETREADS				
	POSITION			DRIVE				TRA	ILER	
	\	PAGE 25	PAGE 25	PAGE 26	PAGE 26	PAGE 26	PAGE 28	PAGE 28	PAGE 29	PAGE 29
	TIRE	G362™	6572	6338	6372	DWT 14	G316 AT FUEL MAX™	6314	G159 HS	LCT 11
6	11R22.5	26	26	27	22	14	12	12	12	11
ES	255/70R22.5	26	26	27	22	14	12	12	12	11
쯸	275/70R22.5	26	26	27	22	14	12	12	12	11
Ţ	295/75R22.5	26	26	27	22	14	12	12	12	11
TRUCK — TUBELESS	11R24.5	26	26	27	22	14	12	12	12	11
_	285/75R24.5	26	26	27	22	14	12	12	12	11

NOTE: The numbers in the chart represent tread depth based on 32nds of an inch.

ENDURANCE® LHS® LONG HAUL STEER

GOODYEAR'S BEST LONG HAUL STEER TIRE FOR HIGH MILES TO REMOVAL

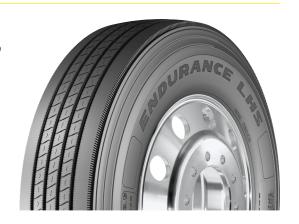

VOCATION



Long Haul



LTL

TECHNOLOGY/CERTIFICATION



SmartWay® Verified

WHEEL POSITION(S)



OPTIMIZED WEAR-RESISTANT TREAD COMPOUND for extra-long miles to removal

DUAL-LAYER TREAD with uniform stiffness for slow, even wear

PREMIUM RIGID CASING CONSTRUCTION for consistent footprints and maximum retreadability

ADVANCED SIDEWALL COMPOUND helps lower rolling resistance and promotes fuel efficiency for SmartWay verification

PRESSURE DISTRIBUTION GROOVE helps promote long, even wear

Complementary Products

DRIVE Endurance® LHD® G572 1AD® Fuel Max SSD® **TRAILER**G316° Fuel Max[™]
Fuel Max° LHT°
Fuel Max SST°

Competitive Replacements

Bridgestone R283A Ecopia Bridgestone R283S Ecopia Bridgestone R284 Ecopia Michelin XZA3 + Michelin X Line Energy Z

TIRE SIZE	LOAD	SIN Lo			NGLE Lation	DUAL	. LOAD		JAL Ation	WE	IGHT	RIM WIDTH		RALL Dth		RALL IETER	STA Rad		RPM	RPK	TREAD Depth		DUAL CING	SPEED
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
									TUBELESS	TIRES ON 15	° DROP CENT	ER RIMS												
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	113	51	8.25	11.0	279	41.5	1,054	19.4	493	501	311	18	12.5	318	75
11R22.5	Н	6,610	3,000	120	830	6,005	2,725	120	830	114	52	8.25	11.0	279	41.5	1,054	19.3	490	501	311	18	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	110	50	8.25	11.2	284	40.3	1,024	18.8	478	515	320	18	12.9	328	75
295/75R22.5	Н	7,160	3,250	123	850	6,610	3,000	123	850	111	50	8.25	11.3	287	40.4	1,026	18.8	478	514	319	18	12.9	328	75
11R24.5	G	6,610	3,000	105	720	6,005	2,725	105	720	122	55	8.25	11.1	282	43.4	1,102	20.3	516	479	298	18	12.5	318	75
11R24.5	Н	7,160	3,250	120	830	6,610	3,000	120	830	123	56	8.25	11.2	284	43.5	1,105	20.4	518	478	297	18	12.5	318	75
285/75R24.5	G	6,175	2,800	110	760	5,675	2,575	110	760	113	51	8.25	11.0	279	41.5	1,054	19.5	495	501	311	18	12.5	318	75
285/75R24.5	Н	6,780	3,075	120	830	6,175	2,800	120	830	114	52	8.25	11.2	284	41.6	1,057	19.5	495	499	310	18	12.5	318	75
01 1 1	1111	,																						

MARATHON® LHS® LONG HAUL STEER

LONG HAUL STEER TIRE FOR HIGH MILES TO REMOVAL



VOCATION



Long Haul

TECHNOLOGY/CERTIFICATION



SmartWay Verified

WHEEL POSITION(S)



DEPENDABLE TREAD COMPOUNDS help improve fuel efficiency for SmartWay verification **FIVE-RIB CONSTRUCTION** helps provide uniform wear for long tire life **ENHANCED CASING** helps provide toughness and durability for maximum retreadability **LATERAL GROOVES AND RIB EDGE SIPES** help enhance traction in all weather conditions

Complementary Prod	ucts
DRIVE Marathon® LHD®	TRAILER Marathon® LHT®

Competitive Replacements	
BFGoodrich Highway Control S	Continental EcoPlus HS3
Firestone FS591	

TIRE SIZE	LOAD	SIN Lo			IGLE Ation	DUAL	. LOAD	DL INFL	JAL Ation	WEI	GHT	RIM WIDTH		RALL Dth	OVE Dian	RALL Ieter	STA Rad		RPM	RPK	TREAD Depth	MIN. Spa	DUAL CING	SPEED
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
									TUBELESS	TIRES ON 15°	DROP CENTE	ER RIMS												
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	114	52	8.25	10.8	274	41.2	1,046	19.2	488	504	313	18	12.5	318	75
11R22.5	Н	6,610	3,000	120	830	6,005	2,725	120	830	114	52	8.25	10.8	274	41.2	1,046	19.2	488	504	313	18	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	110	50	8.25	11.2	284	40.3	1,024	18.8	478	515	320	18	12.9	328	75
295/75R22.5	Н	7,160	3,250	123	850	6,610	3,000	123	850	111	50	8.25	11.2	284	40.3	1,024	18.8	478	515	320	18	12.9	328	75
11R24.5	G	6,610	3,000	105	720	6,005	2,725	105	720	122	55	8.25	10.8	274	43.2	1,097	20.1	511	481	299	18	12.5	318	75
11R24.5	Н	7,160	3,250	120	830	6,610	3,000	120	830	123	56	8.25	10.8	274	43.2	1,097	20.1	511	481	299	18	12.5	318	75
285/75R24.5	G	6,175	2,800	110	760	5,675	2,575	110	760	113	51	8.25	11.1	282	41.3	1,049	19.4	493	503	313	18	12.5	318	75

ENDURANCE® LHD® LONG HAUL DRIVE

GOODYEAR'S BEST TOUGH LONG HAUL DRIVE TIRE FOR HIGH MILES TO REMOVAL



VOCATION



Long Haul

TECHNOLOGY/CERTIFICATION



SmartWay® Verified

WHEEL POSITION(S)



OPTIMIZED CAP BASE TREAD COMBINATION helps promote longer miles to removal and lower rolling resistance

DEEP 30/32" CLOSED SHOULDER TREAD DESIGN provides enhanced wearable rubber for long tread life

PREMIUM ENHANCED CASING helps provide toughness and durability for maximum retreadability

ADVANCED SIDEWALL COMPOUND helps promote fuel efficiency with lower rolling resistance to meet SmartWay verification

TREDLOCK® TECHNOLOGY FEATURES INTERLOCKING MICROGROOVES to help stabilize tread area for longer miles to removal and resistance to irregular wear



FEATURING TREDLOCK TECHNOLOGY

		M/	ATCHING RETREAD	os	
	RETREADS	SIZE	AVAILAB	LE WIDTH	TREAD DEPTH
			IN	MM	32NDS
	UNICIRCLE®	295/75R22.5	81/2, 9, 91/4	215, 230, 235	26
	UNICIRCLE	11R22.5	81/2, 9	215, 230	26
	UNICIRCLE	11R24.5	8 1/2	215	26
ľ	PRECURE	-	81/2, 81/8, 91/4	215, 225, 235	26

Complementary Prod	ucts
STEER Endurance® LHS®	TRAILER G316° Fuel Max° LHT°

Competitive Replaceme	ents
Bridgestone M710 Ecopia	Michelin X Line Energy D Michelin XDA Energy +

TIRE SIZE	TIRE SIZE LOAD RANGE	SIN Lo			NGLE .ation	DUAL	. LOAD		JAL Ation	WE	IGHT	RIM WIDTH	OVE WII		OVE Dian	RALL Ieter	STA Rad	TIC IIUS	RPM	RPK	TREAD Depth	MIN. Spa	DUAL CING	SPEED
	KANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
									TUBELESS	TIRES ON 15	° DROP CENTE	R RIMS												
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	126	57	8.25	11.0	279	42.3	1,074	19.9	505	492	306	30	12.5	318	75
11R22.5	Н	6,610	3,000	120	830	6,005	2,725	120	830	126	57	8.25	11.0	279	42.4	1,077	20.0	508	491	305	30	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	131	59	8.25	11.4	290	41.3	1,049	19.3	490	508	316	30	12.9	328	75
11R24.5	G	6,610	3,000	105	720	6,005	2,725	105	720	139	63	8.25	10.9	277	44.5	1,130	20.9	531	469	291	30	12.5	318	75
11R24.5	Н	7,160	3,250	120	830	6,610	3,000	120	830	139	63	8.25	10.8	274	44.5	1,130	20.9	531	469	291	30	12.5	318	75
285/75R24.5	G	6,175	2,800	110	760	5,675	2,575	110	760	137	62	8.25	11.1	282	42.3	1,074	19.9	505	493	306	30	12.5	318	75

G572 1AD° FUEL MAX°

GOODYEAR'S BEST LONG HAUL DRIVE TIRE FOR HIGH-TORQUE, SINGLE-AXLE DRIVE AND 6X2 APPLICATIONS



VOCATION



Long Haul



LTL



Tanker

TECHNOLOGY/CERTIFICATION



Fuel Max®



SmartWay Verified

WHEEL POSITION(S)



OPTIMIZED CAP BASE TREAD COMBINATION helps promote longer miles to removal and lower rolling resistance

24/32" CLOSED SHOULDER TREAD DESIGN helps provide long even wear in high-torque applications

PREMIUM ENHANCED CASING helps provide toughness and durability for maximum retreadability

HIGHLY SIPED CENTER RIB AND LATERAL GROOVES enhance traction and long tread life in high scrub applications

TREDLOCK TECHNOLOGY FEATURES INTERLOCKING MICROGROOVES to help stabilize tread area for longer miles to removal and resistance to irregular wear



FEATURING TREDLOCK TECHNOLOGY

	M/	ATCHING RETREAD	os	
RETREADS	SIZE	AVAILABI	LE WIDTH	TREAD DEPTH
		IN	MM	32NDS
UNICIRCLE	295/75R22.5	81/2, 9, 91/4	215, 230, 235	26
UNICIRCLE	11R22.5	81⁄2, 9	215, 230	26
UNICIRCLE	11R24.5	8 1/2	215	26
PRECURE	_	81/2, 87/8, 91/4	215, 225, 235	26

Complementary Products								
STEER TRAILER								
Endurance LHS	G316 Fuel Max LHT							

	Competitive Replace	nents						
Bridgestone M726 EL Michelin XDA5+								

TIRE SIZE	LOAD	SIN Lo			IGLE Ation	DUAL	LOAD		JAL Ation	WE	IGHT	RIM Width		RALL Dth	OVE DIAN	RALL Ieter		ITIC IIUS	RPM	RPK	TREAD Depth	MIN. Spai	DUAL CING	SPEED
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
	TUBELESS TIRES ON 15° DROP CENTER RIMS																							
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	121	55	8.25	11.1	282	42.1	1,069	19.7	500	496	308	24	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	121	55	8.25	11.3	287	40.7	1,034	19.0	483	513	319	24	12.9	328	75

FUEL MAX® LHD® 2 LONG HAUL DRIVE

GOODYEAR'S BEST LONG HAUL DRIVE TIRE FOR FUEL EFFICIENCY



VOCATION



Long Haul

TECHNOLOGY/CERTIFICATION



Fuel Max®



SmartWay® Verified



3PMSF Rating

WHEEL POSITION(S)



FUEL-FOCUSED TREAD COMPOUND COMBINATION promotes low rolling resistance for GHG2 verification

24/32" CLOSED SHOULDER TREAD DESIGN helps balance miles to removal and fuel efficiency

PREMIUM ENHANCED CASING CONSTRUCTION helps provide toughness and durability for maximum retreadability

ADVANCED SIDEWALL AND BELT COMPOUNDS help promote fuel efficiency with lower rolling resistance to meet SmartWay verification

TREDLOCK® TECHNOLOGY WITH DOUBLE CORRUGATED BLADES helps improve wear evenness and increases traction for 3PMSF rating

*Meets Three-Peak Mountain Snowflake (3PMSF) Traction Requirements.



FEATURING TREDLOCK TECHNOLOGY

Complementary Products

STEER

Endurance® LHS®

TRAILER

Fuel Max G316 LHT° Fuel Max® LHT° Fuel Max SST°

TIRE SIZE	LOAD Range	TREAD Depth 32nds					
TUBELES	CENTER RIMS						
11R22.5	G	24					
295/75R22.5	G	24					

Check goodyeartrucktires.com for updated data.

0	٦m	not	itive	۱D	nη	امرا	nn	۸r	ı+c
1.1	ш	mei	HIVE	אי	en	121	:011	œ	II.S

Bridgestone M713 Ecopia Bridgestone M710 Ecopia Michelin X Line Energy D + Michelin XDA ENERGY +

FUEL MAX SSD® DURASEAL™ SUPER SINGLE DRIVE

GOODYEAR'S BEST WIDE BASE LONG HAUL DRIVE TIRE FOR LONG MILES TO REMOVAL AND FUEL EFFICIENCY WITH PUNCTURE-SEALING TECHNOLOGY



VOCATION



Long Haul

TECHNOLOGY/CERTIFICATION



Wide Base



DuraSeal™



Fuel Max



SmartWay Verified

WHEEL POSITION(S)



SPECIAL TREAD COMPOUND for enhanced fuel economy

OPEN SHOULDER TREAD design and optimized footprint for even wear and long miles to removal

PREMIUM ENHANCED CASING WITH BUILT-IN DURASEAL


TECHNOLOGY® helps provide toughness and durability while sealing tread punctures to reduce downtime**


WIDE GROOVES WITH STONE PROTECTORS resist stone drilling and enhance casing life

TREDLOCK TECHNOLOGY FEATURES INTERLOCKING MICROGROOVES to

help stabilize tread area for longer miles to removal and resistance to irregular wear

**Seals up to ¼" diameter punctures in the repairable area of the tread. Does not seal sidewall punctures.





FEATURING DURASEAL AND TREDLOCK TECHNOLOGY

COMPLEMENTARY RETREADS — G392													
RETREADS	SIZE	AVAILABI	TREAD DEPTH										
		IN	IN MM										
UNICIRCLE®	445/50R22.5	1514, 151/2	385, 395	24									
PRECURE	445/50R22.5	1514, 151/8	385, 405	24									

Complementary Products									
	STEER	TRAILER							
	Endurance LHS	Fuel Max SST							

Competitive Replacements
Bridgestone Greatec M835A Ecopia `
Michelin X-One Line Energy D
Michelin X-One Line Grip D

DURASEAL SIZES AVAILABLE

TIRE SIZE	LOAD			SINGLE Inflation		DUAL LOAD		DUAL Inflation		WEIGHT		RIM OVERALL WIDTH WIDTH					STATIC Radius		RPK	TREAD Depth	MIN. Spa	DUAL CING	SPEED	
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
	TUBELESS TIRES ON 15' DROP CENTER RIMS																							
445/50R22.5	L	10,200	4,625	120	830	N/A	N/A	N/A	N/A	190	86	14	17.4	442	40	1,016	18.5	470	522	324	24	N/A	N/A	75

MARATHON® LHD® LONG HAUL DRIVE

TOUGH LONG HAUL DRIVE TIRE FOR HIGH MILES TO REMOVAL



VOCATION



Long Haul

TECHNOLOGY/CERTIFICATION



SmartWay® Verified

WHEEL POSITION(S)



DEPENDABLE TREAD COMPOUNDS help improve fuel efficiency for SmartWay verification

CLOSED SHOULDER TREAD DESIGN balances fuel economy and miles to removal

ENHANCED CASING helps provide toughness and durability for maximum retreadability

COMPOUNDING AND RETREADABILITY help provide value to lower your cost per mile

Complementa	ry Products
STEER	TRAILE

Marathon® LHS®

TRAILERMarathon® LHT®

Competitive Replacements

BFGoodrich DR454 Continental HDL2

Firestone FD691 Continental Hybrid HD3

TIRE SIZE	LOAD	SF LOAD		SINGLE Inflation		DUAL	. LOAD	DL Infl	JAL Ation	WEI	GHT	RIM WIDTH	OVE Wil	RALL Oth	OVE Diam		ST <i>A</i> Rae	TIC IIUS	RPM	RPK	TREAD Depth	MIN. Spa	DUAL CING	SPEED
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN N	MM	RATING
									TUBELESS	TIRES ON 15	DROP CENTE	R RIMS												
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	121	55	8.25	11.1	282	42.1	1,069	19.7	500	496	308	24	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	121	55	8.25	11.3	287	40.7	1,034	19.0	483	513	319	24	12.9	328	75
11R24.5	G	6,610	3,000	105	720	6,005	2,725	105	720	134	61	8.25	11.1	282	44.1	1,120	20.7	526	473	294	24	12.5	318	75
11R24.5	Н	7,160	3,250	120	830	6,610	3,000	120	830	135	61	8.25	11.1	282	44.1	1,120	20.7	526	473	294	24	12.5	318	75
285/75R24.5	G	6,175	2,800	110	760	5,675	2,575	110	760	124	56	N/A	N/A	N/A	N/A	N/A	19.7	500	498	310	24	12.5	318	75





GOODYEAR'S BEST LONG HAUL TRAILER TIRE FOR FUEL EFFICIENCY



VOCATION



Long Haul



LTL



Food & Beverage



Tanker

TECHNOLOGY/CERTIFICATION



Fuel Max®



SmartWay® Verified

WHEEL POSITION(S)



SUPER-FUEL TREAD COMPOUNDS help promote low rolling resistance and increased fuel efficiency

PROTECTIVE SHOULDER COMPOUND helps guard the outer tread from accidental curb damage

PREMIUM ENHANCED CASING helps provide toughness and durability for maximum retreadability

ADVANCED SIDEWALL COMPOUND helps lower rolling resistance and promotes fuel efficiency for SmartWay verification

PRESSURE DISTRIBUTION GROOVe helps promote even wear

MATCHING RETREADS												
RETREADS	SIZE	AVAILABI	LE WIDTH	TREAD DEPTH								
		IN	MM	32NDS								
UNICIRCI F®	295/75R22 5	81/2 87/2 91/4	215 225 235	11								

Complementary Produ	ucts
STEER	TRAILER
Endurance® LHS®	Endurance® LHD®

Competitive Replacements									
Bridgestone R197 Ecopia	Michelin X Line Energy T								

TIRE SIZE	LOAD	SING Loa			NGLE .ation	DUAL	LOAD		JAL Ation	WE	GHT	RIM WIDTH	OVEI WII		OVE DIAM	RALL Ieter	STA Rad		RPM	RPK	TREAD Depth	MIN. Spac		SPEED
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
									TUBELESS	TIRES ON 15	DROP CENTE	R RIMS												
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	100	46	8.25	11.2	284	40.1	1,019	18.7	475	514	319	12	12.9	328	75

FUEL MAX SST® DURASEAL™ SUPER SINGLE TRAILER

GOODYEAR'S BEST WIDE BASE LONG HAUL TRAILER TIRE FOR LONG MILES TO REMOVAL AND FUEL EFFICIENCY WITH PUNCTURE-SEALING TECHNOLOGY



VOCATION



Long Haul

TECHNOLOGY/CERTIFICATION



Wide Base



DuraSeal™



Fuel Max



SmartWay Verified

WHEEL POSITION(S)



SPECIAL TREAD COMPOUND for enhanced fuel economy and SmartWay verification


OPTIMIZED TREAD DESIGN AND TIRE FOOTPRINT promote even wear and long miles to removal

PREMIUM ENHANCED CASING helps provide toughness and durability for maximum retreadability

ADVANCED SIDEWALL COMPOUND helps lower rolling resistance and promotes fuel efficiency for SmartWay verification

 $\textbf{BUILT-IN DURASEAL TECHNOLOGY}^{\texttt{0}}$ helps seal tread punctures and reduce downtime *

*Seals up to ¼" diameter punctures in the repairable area of the tread. Does not seal sidewall punctures.



FEATURING DURASEAL TECHNOLOGY

	COMPLEN	IENTARY RETREAD	S – G394				
RETREADS	SIZE	AVAILABI	LE WIDTH	TREAD DEPTH			
		IN	MM	32NDS			
UNICIRCLE	445/50R22.5	15 ¼, 15 ½	385, 395	12			
PRECURE	445/50R22.5	15¼, 15¾	385, 405	12			

Complementary Produ	ucts
STEER	TRAILER
Endurance LHS	Fuel Max SSD®

Competitive Replacer	ments
Bridgestone Greatec R197 Ecopia	Michelin X-One Line Energy T

TIRE SIZE	LOAD	SIN(NGLE Lation	DUAI	LOAD		DUAL Lation	WE	IGHT	RIM WIDTH	OVEI WIE	RALL Dth		RALL Meter		TIC DIUS	RPM	RPK	TREAD Depth	MIN. Spa	DUAL CING	SPEED
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
	TUBELESS TIRES ON 15' DROP CENTER RIMS																							
445/50R22.5	L	10,200	4,625	120	830	N/A	N/A	N/A	N/A	167	76	14	17.5	445	39.2	996	18.1	460	526	327	12	N/A	N/A	75

G316® LHT FUEL MAX DURASEAL LONG HAUL TRAILER

GOODYEAR'S BEST LONG HAUL TRAILER TIRE FOR LONG MILES TO REMOVAL WITH PUNCTURE-SEALING TECHNOLOGY



VOCATION



Long Haul



LTL



Food & Beverage



Tanker

TECHNOLOGY/CERTIFICATION



Fuel Max®



DuraSeal™



SmartWay® Verified

WHEEL POSITION(S)



SPECIAL TREAD COMPOUND for long miles to removal and SmartWay verification

PROTECTIVE SHOULDER COMPOUND helps guard the outer tread from accidental curb damage

PREMIUM ENHANCED CASING helps provide toughness and durability for maximum retreadability

PRESSURE DISTRIBUTION GROOVE helps promote long, even wear

BUILT-IN DURASEAL TECHNOLOGY® helps seal tread punctures and reduce downtime*

*Seals up to ¼" diameter punctures in the repairable area of the tread. Does not seal sidewall punctures.



FEATURING DURASEAL TECHNOLOGY

	M	ATCHING RETREAD	S	
RETREADS	SIZE	AVAILABI	LE WIDTH	TREAD DEPTH
		IN	MM	32NDS
UNICIRCLE®	11R22.5	81/2, 9	215, 230	12
UNICIRCLE	295/75R22.5	81⁄2, 9	215, 230	12
UNICIRCLE	285/75R24.5	81⁄2, 9	215, 230	12
PRECURE	-	8, 81/2, 83/4, 9	205, 215,	12

Complementary Produ	ucts
STEER	TRAILER
Endurance® LHS®	Endurance® LHD®

Competitive Replaceme	ents
Bridgestone R197 Ecopia	Michelin X Line Energy T

DURASEAL SIZES AVAILABLE

TIRE SIZE	LOAD	SINI Lo			NGLE .ation	DUAI	LOAD	DU INFL	JAL Ation	WE	IGHT	RIM WIDTH		RALL DTH		RALL IETER		ITIC Dius	RPM	RPK	TREAD Depth	MIN. Spa	DUAL CING	SPEED
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
	TUBELESS TIRES ON 15" DROP CENTER RIMS																							
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	107	49	8.25	10.9	277	41.0	1,041	19.0	483	483	300	12	12.5	318	75
295/75R22.5	G	6.175	2.800	110	760	5.675	2.575	110	760	105	48	8.25	11.1	282	39.8	1.011	18.6	472	518	322	12	12.9	328	75

NNN-	NIIR	ASFAI	SI7FS	ΔνΔΙΙ	ΔRIF

TIRE SIZE	LOAD	SINI Lo			NGLE ATION	DUAL	. LOAD		JAL Ation	WEI	GHT	RIM WIDTH		RALL Dth	OVE DIAN	RALL Ieter	STA Rad	TIC IUS	RPM	RPK	TREAD Depth	MIN. Spa		SPEED
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
									TUBELESS	TIRES ON 15°	DROP CENTI	ER RIMS												
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	101	46	8.25	10.9	277	41.0	1,041	19.0	483	483	300	12	12.5	318	75
255/70R22.5	Н	5,510	2,500	120	830	5,070	2,300	120	830	87	39	7.50	10.1	257	36.3	922	17.1	434	568	353	13	11.3	287	81
275/70R22.5	J	6,940	3,150	130	900	6,395	2,900	130	900	96	44	7.50	10.5	267	37.5	953	17.5	445	550	342	14	11.9	302	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	100	45	8.25	11.1	282	39.8	1,011	18.6	472	518	322	12	12.9	328	75
11R24.5	G	6,610	3,000	105	720	6,005	2,725	105	720	108	49	8.25	11.2	284	43.1	1,095	20.1	511	478	297	12	12.5	318	75
285/75R24.5	G	6,175	2,800	110	760	5,675	2,575	110	760	103	47	8.25	11.1	282	41.0	1,041	19.1	485	503	313	12	12.5	318	75

MARATHON® LHT® LONG HAUL TRAILER

LONG HAUL TRAILER TIRE FOR LONG MILES TO REMOVAL



VOCATION



Long Haul

TECHNOLOGY/CERTIFICATION



SmartWay Verified

WHEEL POSITION(S)



DEPENDABLE TREAD COMPOUNDS help improve fuel efficiency for SmartWay verification **PROTECTIVE SHOULDER COMPOUND** helps guard the outer tread from accidental curb damage

ENHANCED CASING helps provide toughness and durability for maximum retreadability **DECOUPLING GROOVE** helps minimize shoulder wear for many miles to removal

Complementary Products							
DRIVE Marathon® LHD®							

Competitive Replacements	
BFGoodrich Highway Control T	Continental EcoPlus HT3
Firestone FT491	


TIRE SIZE	LOAD	SIN Lo			IGLE Ation	DUAL	. LOAD		JAL Ation	WEI	GHT	RIM WIDTH		RALL Dth	OVE DIAM	RALL Ieter		TIC DIUS	RPM	RPK	TREAD Depth		DUAL CING	SPEED
	RANGE	LBS	KG	PSI	KPA	LBS	KG	PSI	KPA	LBS	KG	IN	IN	MM	IN	MM	IN	MM			32NDS	IN	MM	RATING
									TUBELESS	TIRES ON 15°	DROP CENTE	R RIMS												
11R22.5	G	6,175	2,800	105	720	5,840	2,650	105	720	100	46	N/A	N/A	N/A	N/A	N/A	19.2	488	502	312	12	12.5	318	75
295/75R22.5	G	6,175	2,800	110	760	5,675	2,575	110	760	97	44	N/A	N/A	N/A	N/A	N/A	18.7	475	515	320	12	12.9	328	75
11R24.5	G	6,610	3,000	105	720	6,005	2,725	105	720	109	49	N/A	N/A	N/A	N/A	N/A	20.6	523	478	297	12	12.5	318	75
285/75R24.5	G	6,175	2,800	110	760	5,675	2,575	110	760	104	47	N/A	N/A	N/A	N/A	N/A	19.7	500	498	310	12	12.5	318	75



FUEL-EFFICIENT SMARTWAY®-VERIFIED UNICIRCLE® WIDE BASE DRIVE RETREAD

RETREADS	SIZE	AVAILABL	TREAD DEPTH		
		IN	MM	32NDS	
UNICIRCIE	445/50R22.5	1514. 1519	385, 395	24	



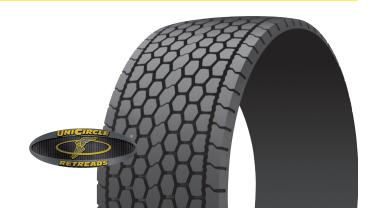

ENDURANCE® LHD® LONG HAUL DRIVE

A SMARTWAY-VERIFIED, TOUGH LONG HAUL DRIVE RETREAD THAT OFFERS HIGH MILES TO REMOVAL

RETREADS	SIZE	AVAILAE	TREAD DEPTH	
		IN	MM	32NDS
UNICIRCLE	295/75R22.5	8 1/2, 9, 9 1/4	215, 230, 235	26
UNICIRCLE	11R22.5	8 1/2, 9	215, 230	26
UNICIRCLE	11R24.5	81/2	215	26

COMPETITIVE REPLACEMENTS: Bandag B760 | Bandag B710 | Michelin X Line Energy D | Michelin XDA2



G362[™]

TREAD DESIGN ENHANCES TRACTION

RETREADS	SIZE	AVAILABI	TREAD DEPTH	
NZINZIJO	0.22	IN	MM	32NDS
UNICIRCLE	295/75R22.5	8 1/2, 9	215, 230	22
UNICIRCLE	11R22	8, 81⁄2, 9	205, 215, 230	22
UNICIRCLE	11R24.5	8 1/2, 9	215, 230	22
PRECURE	_	8, 8 1/2, 9	205, 215, 230	26
•				

COMPETITIVE REPLACEMENTS: Bandag DR 5.3 | Michelin XDHT



G572

A FUEL-EFFICIENT LONG HAUL DRIVE RETREAD WITH LONG MILEAGE

RETREADS	SIZE	AVAILAB	TREAD DEPTH		
		IN	MM	32NDS	
PRECURE	_	816.876.914.956	215, 225, 235, 245	26	

COMPETITIVE REPLACEMENTS: Bandag B760 | Bandag B710 | Michelin X Line Energy D | Michelin XDA2



G338

LASTING TREADWEAR UNDER HIGH-TORQUE CONDITIONS OF SINGLE-AXLE VEHICLES

RETREADS	SIZE	AVAILABI	TREAD DEPTH	
		IN	MM	32NDS
PRECURE	PRECURE —		215, 220	27

COMPETITIVE REPLACEMENTS: Bandag BDR-HT3 | Michelin XDA-HT | Michelin XDHT



G372

DEEP LUG RETREAD FOR LONG LIFE, SUPERB TRACTION AND A LOW COST PER MILE

RETREADS	SIZE	AVAILABL	TREAD DEPTH	
		IN	MM	32NDS
PRECURE	_	8, 8 1/2, 8 1/8, 9 1/4	205, 215, 225, 235	22

 ${\bf COMPETITIVE\ REPLACEMENT:\ Bandag\ DR\ 5.3}$



DWT 14

OPEN SHOULDER TRACTION DRIVE RETREAD

RETREADS	SIZE	AVAILABL	TREAD DEPTH	
		IN	MM	32NDS
PRECURE	_	8, 8 %	205, 220	14

COMPETITIVE REPLACEMENTS: Bandag ECL Drive | Michelin CD-LL





FUEL-EFFICIENT SMARTWAY®-VERIFIED UNICIRCLE® WIDE BASE TRAILER RETREAD

RETREADS	SIZE	AVAILABI	AVAILABLE WIDTH					
		IN	MM	32NDS				
UNICIRCLE	445/50R22.5	15 ¼, 15 ½	385, 395	12				





FUEL MAX® LHT® LONG HAUL TRAILER

GOODYEAR'S MOST FUEL-EFFICIENT TRAILER RETREAD

RETREADS	SIZE	AVAILABLE WIDTH		TREAD DEPTH	
		IN	MM	32NDS	
UNICIRCLE®	295/75R22.5	81/2, 81/8, 91/4	215, 225, 235	11	

COMPETITIVE REPLACEMENTS: Bandag B197 | Michelin XT-1 AT



G316 AT FUEL MAX™

HELPS REDUCE ROLLING RESISTANCE TO ENHANCE FUEL ECONOMY

RETREADS	SIZE	AVAILABLE WIDTH		TREAD DEPTH
		IN	MM	32NDS
UNICIRCLE	295/75R22.5	81⁄2, 9	215, 230	12
UNICIRCLE	11R22.5	81⁄2, 9	215, 230	12
PRECURE	_	8, 8 1/2, 8 3/4, 9, 9 1/2	205, 215, 220, 230, 240	12

COMPETITIVE REPLACEMENTS: Bandag FCR-T2 $\,$ I $\,$ Michelin XTA-2 $\,$



G314 HELPS PROMOTE EVEN WEAR

RETREADS	SIZE	AVAILABLE WIDTH		TREAD DEPTH
			MM	32NDS
UNICIRCLE	295/75R22.5	8 1/2, 9	215, 230	12
UNICIRCLE	11R22.5	8 1/2, 9	215, 230	12
UNICIRCLE	11R24.5	81/2	215	12
PRECURE	_	8, 81/2, 83/4, 9	205, 215, 220, 230	12

COMPETITIVE REPLACEMENTS: Bandag FCR-T2 | Michelin XTA-2



G159 HS HIGHWAY SERVICE

EFFECTIVE HIGHWAY SERVICE

RETREADS	SIZE	AVAILABLE WIDTH		TREAD DEPTH	
		IN	MM	32NDS	
PRECURE	_	8, 81/2, 9	205, 215, 230	12	

COMPETITIVE REPLACEMENT: Bandag TR 4.1



LCT 11 TRAILER & ALL-POSITION RETREADS

RETREADS	SIZE	AVAILABLE WIDTH		TREAD DEPTH	
		IN	MM	32NDS	
PRECURE	_	7, 7 ½, 8, 8 ½, 8 %, 9 ¼, 9 %	180, 190, 205, 215, 225, 235, 245	11	

COMPETITIVE REPLACEMENT: Bandag BTL



NOTES	

NΙ	Λ	٠т	г	c

NOTES







Premier Service Network Industry-leading network of 2,300+ North American locations.†



goodyeartrucktires.com

