THE POWER OF THE PAW MEANS THE POWER OF RELIABILITY. AND VALUE.



# UNIROYAL® DATA BOOK

PASSENGER AND LIGHT TRUCK TIRES AUGUST 2021



UNIROYAL®



## **EXPANDING OUR GRIP ON THE MARKET**

If all of us have learned one thing over the past year, it's that the future is truly unpredictable.

So how do you deal with such disruption, uncertainties and unpredictability?

Here's how: You create your own future. And you look to those who will be a part of it.

UNIROYAL® has been doing that for well over 100 years. And now, we're doing it in bigger and more meaningful ways than perhaps ever before.

Recently, we expanded our UNIROYAL® TIGER PAW® line of tires so that we have a tire for virtually every passenger car and CUV/SUV on the road in America today.

But beyond that, we've taken our many important attributes; affordability, reliability, durability, and attached them to a younger, more receptive audience that wants to do business with enduring brands that provide real, authentic value.

UNIROYAL has always been about making your family feel secure and comfortable, both in terms of the ride we provide, and the price we charge. Now, we're talking to the newest generation of drivers as well.

Those who are just beginning their careers, starting new jobs, graduating from school and who care dearly about what they get in return for what they pay.

The UNIROYAL story fits perfectly with their lives and their goals. UNIROYAL provides them with one less thing to worry about, an extra boost of confidence without the extra cost associated with so many other tires.

So the next time a Gen Z customer or even a Millennial walks into your store, show them that you get them.

Make a loyal customer by recommending the affordable, dependable value tire that gets them where they're going in a way that lets them do what they really want to do... concentrate on their lives and their futures.





## TABLE OF CONTENTS

OVERVIEW
TIRE CATEGORIES1
ULTRA-HIGH PERFORMANCE TIRES
UNIROYAL® TIGER PAW® GTZ All Season 2
PERFORMANCE/PASSENGER TIRES
UNIROYAL® TIGER PAW® Touring A/S
WINTER TIRES
UNIROYAL® TIGER PAW® Ice & Snow™ 313
LIGHT TRUCK/SUV/CROSSOVER TIRES
UNIROYAL® LAREDO® Cross Country Tour
COMMERCIAL TIRES
UNIROYAL® LAREDO® HD/H™19
TIPS & IMPORTANT INFORMATION
SPEED RATINGS

# TIRE CATEGORIES

ULTRA-HIGH PERFORMANCE, PERFORMANCE PASSENGER TIRES AND WINTER TIRES

### ULTRA-HIGH PERFORMANCE TIRES

WITH COMPUTER-PHASED AND OPTIMIZED TREAD DESIGN, THE UNIROYAL® TIGER PAW® GTZ ALL SEASON 2 TIRE IS AN ULTRA-HIGH PERFORMANCE TIRE DESIGNED FOR A QUIET COMFORTABLE RIDE.

Tru-Last Technology gives you long, even treadwear by managing stress within the tire and the wide circumferential tread grooves and new all-season compound are engineered to give you a confident ride. The UNIROYAL® TIGER PAW® GTZ All Season 2 Tire, an ultrahigh performance all-season tire that offers long-lasting treadlife for everyday drivers.

# PERFORMANCE PASSENGER TIRES

THE UNIROYAL® TIGER PAW® FAMILY OF PASSENGER CAR AND MINIVAN TIRES PROVIDES A COMFORTABLE, QUIET RIDE, LONG-LASTING TREADLIFE AND ALL-SEASON TRACTION ON THE HIGHWAY AND AROUND TOWN.

Ride in confidence on virtually any road and in virtually any weather. UNIROYAL® passenger tires give you and your family the comfort you want along with the performance you need. Get outstanding everyday performance that's designed for your style of driving.

#### **WINTER TIRES**

THE UNIROYAL® TIGER PAW® ICE & SNOW™ 3, THE AFFORDABLE WINTER TIRE, PROVIDING ENHANCED DEPENDABILITY IN ALL WINTER CONDITIONS — ICE,2 SNOW,1 AND WET. 3

Built with the latest winter compound technology for improved grip in cold weather. A highly-siped tread surface with 3D interlocking shoulder sipes and wide lateral tread grooves gives enhanced traction in snow.1





# TIRE CATEGORIES

LIGHT TRUCK/SUV/CROSSOVER AND COMMERCIAL TIRES

# LIGHT TRUCK/SUV/CROSSOVER TIRES

GET THE LONG TREADLIFE, TOUGHNESS AND ALL-SEASON GRIP YOU WANT IN A TIRE THAT HELPS KEEP YOU COMFORTABLE AND SAFE ON AND OFF THE ROAD. YOU CAN DEPEND ON THE UNIROYAL® LAREDO® FAMILY OF TIRES IN ANY ENVIRONMENT.

From off-road ruggedness to smooth, performance-based on-road use, these tires are engineered to help drivers get the most out of their particular vehicles and driving styles. All at a surprisingly affordable price.

#### **COMMERCIAL TIRES**

# THE UNIROYAL® LAREDO® HD/H.™ THE HEAVY-DUTY TIRE BUILT TO TACKLE WORK SITES AND EXTREME WEATHER CONDITIONS.

If you're looking for a truck tire that works as hard as you do at an affordable price, the UNIROYAL® LAREDO® HD/HTM Tire is perfect. Designed for everyday job sites, it absorbs big impacts and can carry heavy loads while providing all-season traction.

<sup>1</sup>Based on third-party snow traction tests using ASTM Test Method F1805-12 in size 205/55R16 91T versus previous generation UNIROYAL® TIGER PAW® Ice & Snow™ II Tire in size 205/55R16 91S. Actual on-road results may vary.

Based on third-party ice traction and snow traction tests using ASTM Test Method F1805-12 in size 205/55R16 91T versus previous generation UNIROYAL® TIGER PAW® (ce & Snow™ II Tire in size 205/55R16 91S. Actual on road results may vary.

<sup>3</sup>Based on internal wet braking results from both 80 km/h and 96 km/h using a 2013 Honda Civic in size 205/55R16 91T versus previous generation UNIROYAL® TIGER PAW® Ice & Snow™ II Tire in size 205/55R16 91S. Actual on-road results may vary.





UNIROYAL®

# **TIGER PAW® GTZ ALL SEASON 2**

An ultra-high performance all-season tire that offers long-lasting treadlife for everyday drivers.









#### **FEATURES AND BENEFITS**

Long-lasting treadlife, now backed by a 50,000-mile warranty.

Tru-Last Technology gives you long, even treadwear by managing stress within the tire footprint.


- Engineered to give you a confident ride. Wide, circumferential tread grooves, traction snow bars, and an all-season compound.
- An ultra-high performance tire designed for a quiet comfortable ride.

Computer-phased and optimized tread design.

#### Get a high-performance replacement for less than you think.

This next-gen ultra-high performance tire brings improved features and a robust warranty to value-seeking consumers. An affordable tire with long-lasting treadlife backed by a 50,000-mile warranty.

#### **MSPN COUNT** PER RIM SIZE

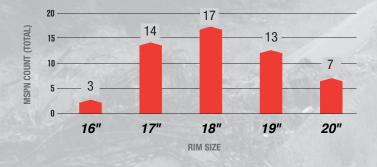



#### UNIROYAL® TIGER PAW® GTZ ALL SEASON 2

THE SITE   DESCRIPTION   WASHING   WALL   WASHING   WA						9858888888		State of the State				William Bridge Sp. S.	d distributed
219/30/2016		TIRE SIZE			SIDE- WALL	MSPN	WIDTH RANGE	ON MEASURING RIM WIDTH	DIAMETER	DEPTH (IN/	MILE @45	LOAD SINGLE	UTQG
22050QR16   S2W   S0K   B5W   08219   6-8   9.17 on 7   24.8   9   036   1389851   380MA		205/55ZR16	91W	50K	BSW	31359	5.5 - 7.5	8.43 on 6.5	24.8	9	836	1356@51	380/A/A
205/46/2017/XL   88W   50K   88W   49846   6.5-7.5   8.11 on 7   24.2   9   838   1236/800   3800/VA		215/55ZR16	93W	50K	BSW	54291	6 - 7.5	8.9 on 7	25.2	9	823	1433@51	380/A/A
2006-002817		225/50ZR16	92W	50K	BSW	89219	6 - 8	9.17 on 7	24.8	9	836	1389@51	380/A/A
215452R177L 99W 50K 8SW 04902 6-7.5 8.30 n7 24.8 9 844 1356050 380A/A 225452R177L 99W 50K 8SW 04902 6-7.5 8.30 n7 25.6 9 815 1521650 380A/A 225452R177L 94W 50K 8SW 78804 7-8.5 8.86 n7.5 24.9 9 833 1477050 380A/A 225452R17 94W 50K 8SW 28011 6-8 917 n7 25.9 9 800 1477651 380A/A 225452R17 94W 50K 8SW 53401 6-8 917 n7 26.7 9 777 1609051 380A/A 235452R17 94W 50K 8SW 05925 7.5-9 9.29 n8 25.3 9 821 1477651 380A/A 235452R17 99W 50K 8SW 20880 6.5-8.5 9.65 n7.5 26.3 9 701 1565051 380A/A 235452R17 99W 50K 8SW 54907 8.5-8.5 9.65 n7.5 26.3 9 701 1565051 380A/A 235452R17 99W 50K 8SW 54907 8.5-8.5 9.65 n7.5 27.1 9 760 1709051 380A/A 245462R17 99W 50K 8SW 54907 8.5-8.5 9.76 n8.5 24.7 9 841 1366051 380A/A 245462R17 99W 50K 8SW 17484 9-11 10.94 n.9.5 26.6 9 810 1521051 380A/A 225452R17 99W 50K 8SW 17484 9-11 10.94 n.9.5 26.6 9 810 1521051 380A/A 225452R17 99W 50K 8SW 17484 9-11 10.94 n.9.5 26.6 9 810 1623051 380A/A 225452R17 99W 50K 8SW 04233 7-8 8.39 n.7 25.6 9 812 1430050 380A/A 225462R180L 99W 50K 8SW 04233 7-8 8.39 n.7 25.6 9 812 1430050 380A/A 225462R180L 99W 50K 8SW 04233 7-8 8.39 n.7 25.6 9 812 1430050 380A/A 225462R180L 99W 50K 8SW 04233 7-8 8.39 n.7 25.6 9 812 1430050 380A/A 225462R180L 99W 50K 8SW 04233 7-8 8.39 n.7 25.6 9 812 1430050 380A/A 225462R180L 99W 50K 8SW 04233 7-8 8.39 n.7 25.6 9 812 1430050 380A/A 225462R180L 99W 50K 8SW 06419 7-8.5 8.86 n.7.5 25.9 9 802 1521050 380A/A 225462R180L 99W 50K 8SW 06419 7-8.5 8.86 n.7.5 25.9 9 802 1521050 380A/A 225462R180L 99W 50K 8SW 06433 8-8.5 9.00 n.8 25 9 829 1300050 380A/A 225462R180L 99W 50K 8SW 06433 8-8.5 9.40 n.8.5 25.7 9 803 1609051 380A/A 225462R180L 99W 50K 8SW 06430 8-9.5 9.60 n.8.5 25.7 9 803 1609051 380A/A 225462R180L 99W 50K 8SW 06430 8-9.5 9.60 n.8.5 25.7 9 803 1609051 380A/A 225462R180L 99W 50K 8SW 06430 8-9.5 9.60 n.8.5 25.7 9 803 1609050 380A/A		205/45ZR17/XL	88W	50K	BSW	49946	6.5 - 7.5	8.11 on 7	24.2	9	858	1235@50	380/A/A
215/502R1770L 96W 50K 85W 04902 6 - 7.5 8.9 on 7 25.5 9 815 1521@50 3800AA 225452R1770L 94W 50K 85W 78804 7 - 8.5 8.86 on 7.5 24.9 9 833 1477@50 3800AA 225452R177 94W 50K 85W 59401 6 - 8 9.17 on 7 26.9 9 803 1477@51 3800AA 225452R177 94W 50K 85W 59401 6 - 8 9.17 on 7 26.7 9 777 1609@51 3800AA 235452R17 94W 50K 85W 59401 6 - 8 9.17 on 7 26.7 9 777 1609@51 3800AA 235452R17 94W 50K 85W 20880 6.5 - 8.5 9.65 on 7.5 26.3 9 791 1565@51 3800AA 235452R17 99W 50K 85W 20880 6.5 - 8.5 9.65 on 7.5 26.3 9 791 1565@51 3800AA 235452R17 99W 50K 85W 34031 8 - 9.5 9.65 on 7.5 27.1 9 766 1709@51 3800AA 245402R17 91W 50K 85W 34031 8 - 9.5 9.65 on 7.5 27.1 9 766 1709@51 3800AA 245402R17 95W 50K 85W 34031 8 - 9.5 10.04 on 8.5 26 9 788 1653@51 3800AA 255452R17 96W 50K 85W 47651 8 - 9.5 10.04 on 8.5 26 9 788 1653@51 3800AA 255452R17 96W 50K 85W 47651 8 - 9.5 10.04 on 8.5 26 9 788 1653@51 3800AA 255452R17 96W 50K 85W 47651 8 - 9.5 10.04 on 8.5 26 9 788 1653@51 3800AA 255452R18 95W 50K 85W 04233 7 - 8 8.39 on 7 25.6 9 810 1653@51 3800AA 255452R18 95W 50K 85W 04233 7 - 8 8.39 on 7 25.6 9 810 1653@51 3800AA 255452R18 95W 50K 85W 04233 7 - 8 8.39 on 7 25.6 9 829 1389@50 3800AA 255452R18 95W 50K 85W 04233 8 - 9.5 880 on 8 25 9 829 1389@50 3800AA 255450R18 95W 50K 85W 04233 8 - 9.5 9.06 on 8 25 9 829 1389@50 3800AA 255450R18 95W 50K 85W 04233 8 - 9.5 9.06 on 8 25 9 829 1389@50 3800AA 255450R18 95W 50K 85W 04333 8 - 9.5 9.06 on 8 25 9 829 1389@50 3800AA 255400R18 95W 50K 85W 04333 8 - 9.5 9.06 on 8 25 9 829 1389@50 3800AA 255400R18 95W 50K 85W 04333 8 - 9.5 9.09 on 8 25 9 829 1389@50 3800AA 255400R18 95W 50K 85W 04333 8 - 9.5 9.09 on 8 25 9 829 1389@50 3800AA 255400R18 95W 50K 85W 04333 8 - 9.5 9.09 on 8 25 9 829 1389@50 3800AA 255400R18 95W 50K 85W 04333 8 - 9.5 9.09 on 8 25 9 829 1389@50 3800AA 255400R18 95W 50K 85W 04333 8 - 9.5 9.09 on 8 25 9 9 829 1389@50 3800AA 255400R18 95W 50K 85W 04333 8 - 9.5 9.09 on 8 25 9 9 829 1389@50 3800AA 255400R18 95W 50K 85W 04333 8 - 9.5 9.09 00 00 00 50 00 00 00 00 00 00 00 00 00		205/50ZR17	89W	50K	BSW	04585	5.5 - 7.5	8.43 on 6.5	25.1	9	828	1279@51	380/A/A
225452R177/L 25452R177/L 25452R177/L 25452R177/L 25492R177/L 25492R177/L 25492R177/L 255452R17 97W 50K 85W 29011 6-8 9.17 on 7 25.9 9 803 1477@51 380/A/A 225452R17 97W 50K 85W 53401 6-8 9.17 on 7 26.7 9 777 1609@51 380/A/A 235452R17 96W 50K 85W 05825 7.5-9 9.29 on 8 25.3 9 821 1477@51 380/A/A 235452R17 96W 50K 85W 20680 6.5-8.5 9.65 on 7.5 26.3 9 791 15662651 380/A/A 235452R17 96W 50K 85W 20680 6.5-8.5 9.65 on 7.5 27.1 9 766 1709@51 380/A/A 235452R17 96W 50K 85W 34031 8-9.5 9.76 on 8.5 24.7 9 841 1356851 380/A/A 245462R17 96W 50K 85W 83587 7.5-8 9.57 on 8 25.6 9 810 1521@51 380/A/A 245462R17 96W 50K 85W 47551 8-9.5 10.04 on 8.5 26 9 798 1653@51 380/A/A 2254402R17 96W 50K 85W 17484 9-11 10.94 on 9.5 25.6 9 810 1653@51 380/A/A 2254402R17 96W 50K 85W 7.5-9 9.06 on 8 25.6 9 810 1653@51 380/A/A 2254402R17 96W 50K 85W 7.5-9 9.06 on 8 25.6 9 810 1653@51 380/A/A 2254402R18/AL 95W 50K 85W 20031 7.5-9 9.06 on 8 25 9 829 1388@50 380/A/A 2254402R18/AL 95W 50K 85W 5602 6-8 9.17 on 7 25.6 9 812 1433@50 380/A/A 2254402R18/AL 95W 50K 85W 5602 6-8 9.17 on 7 26.8 9 774 1521@51 380/A/A 2254402R18/AL 95W 50K 85W 5602 6-8 9.17 on 7 26.8 9 774 1521@51 380/A/A 2254402R18/AL 95W 50K 85W 54634 6-8 8.98 on 6.5 25.9 9 802 1521@50 380/A/A 2254402R18/AL 95W 50K 85W 0439 8-9.5 9.49 on 8 26.3 9 790 1477@61 380/A/A 2254402R18/AL 95W 50K 85W 0439 8-9.5 9.49 on 8 26.3 9 790 1477@61 380/A/A 2254402R18/AL 95W 50K 85W 0439 8-9.5 9.49 on 8 26.3 9 790 1477@61 380/A/A 2254402R18/AL 95W 50K 85W 0439 8-9.5 9.49 on 8 26.3 9 790 1477@61 380/A/A 2254402R18/AL 95W 50K 85W 0439 8-9.5 9.49 on 8 26.3 9 790 1477@61 380/A/A 2354402R18/AL 95W 50K 85W 27180 6.5-8.5 9.65 on 7.5 27.2 9 762 1608@61 380/A/A 2354402R18/AL 95W 50K 85W 27180 6.5-8.5 9.65 on 7.5 27.2 9 762 1608@61 380/A/A 2354402R18/AL 95W 50K 85W 27180 6.5-8.5 9.76 on 8.5 25.7 9 809 1609@61 380/A/A		215/45ZR17/XL	91W	50K	BSW	25054	7 - 8	8.39 on 7	24.6	9	844	1356@50	380/A/A
225/60ZR17         94W         56K         BSW         29011         6 - 8         9.17 on 7         25.9         9         803         1477@51         380/A/A           225/65ZR17         97W         50K         BSW         53401         6 - 8         9.17 on 7         26.7         9         777         1609@51         380/A/A           235/65ZR17         94W         50K         BSW         06025         7.5 - 9         9.29 on 8         25.3         9         821         1477@51         380/A/A           235/65ZR17         96W         50K         BSW         20800         6.5 - 8.5         9.65 on 7.5         26.3         9         791         1565@51         380/A/A           235/65ZR17         98W         50K         BSW         54907         6.5 - 8.5         9.65 on 7.5         27.1         9         766         1709@61         380/A/A           245/45ZR17         91W         50K         BSW         33587         7.5 - 9         9.57 on 8         25.6         9         810         1521@61         380/A/A           256/45ZR17         98W         50K         BSW         47551         8 - 9.5         10.04 on 8.5         26         9         78         1653@51 </th <td></td> <td>215/50ZR17/XL</td> <td>95W</td> <td>50K</td> <td>BSW</td> <td>04902</td> <td>6 - 7.5</td> <td>8.9 on 7</td> <td>25.5</td> <td>9</td> <td>815</td> <td>1521@50</td> <td>380/A/A</td>		215/50ZR17/XL	95W	50K	BSW	04902	6 - 7.5	8.9 on 7	25.5	9	815	1521@50	380/A/A
225/65/2817         97W         50K         BSW         53401         6 - 8         9.17 on 7         26.7         9         777         1609@51         380/A/A           235/45/2817         94W         50K         BSW         05925         7.5 - 9         9.29 on 8         25.3         9         821         1477@51         380/A/A           235/55/2817         96W         50K         BSW         20880         6.5 - 8.5         9.65 on 7.5         26.3         9         791         1565@51         380/A/A           245/40/2817         99W         50K         BSW         54907         6.5 - 8.5         9.65 on 7.5         27.1         9         766         1709@51         380/A/A           245/40/2817         91W         50K         BSW         34031         8 - 9.5         9.76 on 8.5         24.7         9         841         1356@51         380/A/A           245/40/2817         96W         50K         BSW         47551         8 - 9.5         10.04 on 8.5         26         9         798         1853@51         380/A/A           256/45/2817         98W         50K         BSW         17484         9 - 11         10.94 on 9.5         25.6         9         810	3	225/45ZR17/XL	94W	50K	BSW	78804	7 - 8.5	8.86 on 7.5	24.9	9	833	1477@50	380/A/A
235/45ZR17         94W         50K         BSW         05925         7.5 - 9         9.29 on 8         25.3         9         821         1477@51         380/A/A           235/50ZR17         96W         50K         BSW         20880         6.5 - 8.5         9.65 on 7.5         26.3         9         791         1565@51         380/A/A           235/55ZR17         99W         50K         BSW         34031         8 - 9.5         9.65 on 7.5         27.1         9         766         1709@51         380/A/A           245/40ZR17         91W         50K         BSW         34031         8 - 9.5         9.76 on 8.5         24.7         9         841         1356@51         380/A/A           245/45ZR17         95W         50K         BSW         47551         8 - 9.5         10.04 on 8.5         26         9         810         1521@61         380/A/A           256/45ZR17         96W         50K         BSW         47551         8 - 9.5         10.04 on 8.5         26         9         798         1653@51         380/A/A           215/45ZR18/ML         93W         50K         BSW         17484         9 - 11         10.94 on 8.5         26.6         9         810 <t< th=""><td></td><td>225/50ZR17</td><td>94W</td><td>50K</td><td>BSW</td><td>29011</td><td>6 - 8</td><td>9.17 on 7</td><td>25.9</td><td>9</td><td>803</td><td>1477@51</td><td>380/A/A</td></t<>		225/50ZR17	94W	50K	BSW	29011	6 - 8	9.17 on 7	25.9	9	803	1477@51	380/A/A
235/50ZR17 96W 50K 85W 20880 6.5 - 8.5 9.65 on 7.5 26.3 9 791 1566@61 380/A/A 235/55ZR17 99W 50K 85W 54907 6.5 - 8.5 9.65 on 7.5 27.1 9 766 1709@61 380/A/A 245/40ZR17 91W 50K 85W 34031 8 - 9.5 9.76 on 8.5 24.7 9 841 1356@61 380/A/A 245/45ZR17 95W 50K 85W 83587 7.5 - 9 9.57 on 8 25.6 9 810 1521@61 380/A/A 255/45ZR17 98W 50K 85W 47551 8 - 9.5 10.04 on 8.5 26 9 798 1653@51 380/A/A 275/40ZR17 98W 50K 85W 17484 9 - 11 10.94 on 9.5 25.6 9 810 1653@51 380/A/A 215/45ZR18A/L 93W 50K 85W 04233 7 - 8 8.39 on 7 25.6 9 812 1433@50 380/A/A 225/40ZR18A/L 92W 50K 85W 04233 7 - 8 8.39 on 7 25.6 9 812 1433@50 380/A/A 225/40ZR18A/L 95W 50K 85W 08419 7 - 8.5 8.86 on 7.5 25.9 9 802 1521@50 380/A/A 225/50ZR18 95W 50K 85W 56022 6 - 8 9.17 on 7 26.8 9 774 1521@51 380/A/A 225/50ZR18 100W 50K 85W 54634 6 - 8 8.98 on 6.5 28.6 9 777 1764@51 380/A/A 235/40ZR18A/L 95W 50K 85W 04393 8 - 9.5 9.49 on 8.5 25.3 9 819 1521@50 380/A/A 235/40ZR18A/L 95W 50K 85W 04393 8 - 9.5 9.49 on 8.5 25.3 9 819 1521@50 380/A/A 235/40ZR18A/L 95W 50K 85W 04393 8 - 9.5 9.49 on 8.5 25.3 9 819 1521@50 380/A/A 235/40ZR18A/L 95W 50K 85W 04393 8 - 9.5 9.49 on 8.5 25.3 9 790 1477@51 380/A/A 235/40ZR18A/L 95W 50K 85W 04393 8 - 9.5 9.49 on 8.5 25.7 9 809 1609@50 380/A/A 235/40ZR18A/L 95W 50K 85W 04393 8 - 9.5 9.49 on 8.5 25.7 9 809 1609@50 380/A/A 235/40ZR18A/L 95W 50K 85W 04393 8 - 9.5 9.49 on 8.5 25.7 9 809 1609@50 380/A/A		225/55ZR17	97W	50K	BSW	53401	6 - 8	9.17 on 7	26.7	9	777	1609@51	380/A/A
235/55ZR17         99W         50K         8SW         54907         6.5 - 8.5         9.65 on 7.5         27.1         9         766         1709@61         380/A/A           245/40ZR17         91W         50K         BSW         34031         8 - 9.5         9.76 on 8.5         24.7         9         841         1356@51         380/A/A           245/45ZR17         95W         50K         BSW         47551         8 - 9.5         10.04 on 8.5         26         9         798         1653@51         380/A/A           255/45ZR17         98W         50K         BSW         17484         9 - 11         10.94 on 9.5         25.6         9         798         1653@51         380/A/A           215/45ZR18/AL         93W         50K         BSW         04233         7 - 8         8.39 on 7         25.6         9         812         1433@50         380/A/A           225/40ZR18/AL         92W         50K         BSW         20031         7.5 - 9         9.06 on 8         25         9         829         1389@50         380/A/A           225/40ZR18/AL         95W         50K         BSW         08419         7 - 8.5         8.86 on 7.5         25.9         9         802         <		235/45ZR17	94W	50K	BSW	05925	7.5 - 9	9.29 on 8	25.3	9	821	1477@51	380/A/A
245/40ZR17         91W         50K         BSW         34031         8 - 9.5         9.76 on 8.5         24.7         9         841         1356@51         380/A/A           245/45ZR17         95W         50K         BSW         83587         7.5 - 9         9.57 on 8         25.6         9         810         1521@51         380/A/A           255/45ZR17         98W         50K         BSW         47551         8 - 9.5         10.04 on 8.5         26         9         798         1653@51         380/A/A           275/40ZR17         98W         50K         BSW         17484         9 - 11         10.94 on 9.5         25.6         9         810         1653@51         380/A/A           215/45ZR18/XL         93W         50K         BSW         04233         7 - 8         8.39 on 7         25.6         9         812         1433@50         380/A/A           225/40ZR18/XL         95W         50K         BSW         20031         7.5 - 9         9.06 on 8         25         9         829         1389@50         380/A/A           225/45ZR18/XL         95W         50K         BSW         08419         7 - 8.5         8.86 on 7.5         25.9         9         802         1		235/50ZR17	96W	50K	BSW	20880	6.5 - 8.5	9.65 on 7.5	26.3	9	791	1565@51	380/A/A
245/45ZR17         95W         50K         BSW         83587         7.5 - 9         9.57 on 8         25.6         9         810         1521@51         380/A/A           255/45ZR17         98W         50K         BSW         47551         8 - 9.5         10.04 on 8.5         26         9         798         1653@51         380/A/A           275/40ZR17         98W         50K         BSW         17484         9 - 11         10.94 on 9.5         25.6         9         810         1653@51         380/A/A           215/45ZR18/XL         93W         50K         BSW         04233         7 - 8         8.39 on 7         25.6         9         812         1433@50         380/A/A           225/40ZR18/XL         92W         50K         BSW         20031         7.5 - 9         9.06 on 8         25         9         829         1389@50         380/A/A           225/45ZR18/XL         95W         50K         BSW         08419         7 - 8.5         8.86 on 7.5         25.9         9         802         1521@50         380/A/A           225/50ZR18         95W         50K         BSW         56022         6 - 8         8.98 on 6.5         28.6         9         727         176		235/55ZR17	99W	50K	BSW	54907	6.5 - 8.5	9.65 on 7.5	27.1	9	766	1709@51	380/A/A
255/45ZR17         98W         50K         BSW         47551         8 - 9.5         10.04 on 8.5         26         9         798         1653@51         380/A/A           275/40ZR17         98W         50K         BSW         17484         9 - 11         10.94 on 9.5         25.6         9         810         1653@51         380/A/A           215/45ZR18/XL         93W         50K         BSW         04233         7 - 8         8.39 on 7         25.6         9         812         1433@50         380/A/A           225/40ZR18/XL         92W         50K         BSW         20031         7.5 - 9         9.06 on 8         25         9         829         1389@50         380/A/A           225/45ZR18/XL         95W         50K         BSW         08419         7 - 8.5         8.86 on 7.5         25.9         9         802         1521@50         380/A/A           225/45ZR18         95W         50K         BSW         56022         6 - 8         9.17 on 7         26.8         9         774         1521@51         380/A/A           235/40ZR18         100W         50K         BSW         54634         6 - 8         8.98 on 6.5         28.6         9         727         1764		245/40ZR17	91W	50K	BSW	34031	8 - 9.5	9.76 on 8.5	24.7	9	841	1356@51	380/A/A
275/40ZR17         98W         50K         BSW         17484         9 - 11         10.94 on 9.5         25.6         9         810         1653@51         380/A/A           215/45ZR18/XL         93W         50K         BSW         04233         7 - 8         8.39 on 7         25.6         9         812         1433@50         380/A/A           225/40ZR18/XL         92W         50K         BSW         20031         7.5 - 9         9.06 on 8         25         9         829         1389@50         380/A/A           225/40ZR18/XL         95W         50K         BSW         08419         7 - 8.5         8.86 on 7.5         25.9         9         802         1521@50         380/A/A           225/50ZR18         95W         50K         BSW         56022         6 - 8         9.17 on 7         26.8         9         774         1521@51         380/A/A           225/60ZR18         100W         50K         BSW         54634         6 - 8         8.98 on 6.5         28.6         9         727         1764@51         380/A/A           235/40ZR18/XL         95W         50K         BSW         04393         8 - 9.5         9.49 on 8.5         25.3         9         819		245/45ZR17	95W	50K	BSW	83587	7.5 - 9	9.57 on 8	25.6	9	810	1521@51	380/A/A
215/45ZR18/XL       93W       50K       BSW       04233       7 - 8       8.39 on 7       25.6       9       812       1433@50       380/A/A         225/40ZR18/XL       92W       50K       BSW       20031       7.5 - 9       9.06 on 8       25       9       829       1389@50       380/A/A         225/45ZR18/XL       95W       50K       BSW       08419       7 - 8.5       8.86 on 7.5       25.9       9       802       1521@50       380/A/A         225/50ZR18       95W       50K       BSW       56022       6 - 8       9.17 on 7       26.8       9       774       1521@51       380/A/A         225/60ZR18       100W       50K       BSW       54634       6 - 8       8.98 on 6.5       28.6       9       727       1764@51       380/A/A         235/40ZR18/XL       95W       50K       BSW       04393       8 - 9.5       9.49 on 8.5       25.3       9       819       1521@50       380/A/A         235/45ZR18       94W       50K       BSW       14112       7.5 - 9       9.29 on 8       26.3       9       790       1477@51       380/A/A         235/50ZR18       97W       50K       BSW       27186		255/45ZR17	98W	50K	BSW	47551	8 - 9.5	10.04 on 8.5	26	9	798	1653@51	380/A/A
225/40ZR18/XL         92W         50K         BSW         20031         7.5 - 9         9.06 on 8         25         9         829         1389@50         380/A/A           225/45ZR18/XL         95W         50K         BSW         08419         7 - 8.5         8.86 on 7.5         25.9         9         802         1521@50         380/A/A           225/50ZR18         95W         50K         BSW         56022         6 - 8         9.17 on 7         26.8         9         774         1521@51         380/A/A           225/60ZR18         100W         50K         BSW         54634         6 - 8         8.98 on 6.5         28.6         9         727         1764@51         380/A/A           235/40ZR18/XL         95W         50K         BSW         04393         8 - 9.5         9.49 on 8.5         25.3         9         819         1521@50         380/A/A           235/45ZR18         94W         50K         BSW         14112         7.5 - 9         9.29 on 8         26.3         9         790         1477@51         380/A/A           235/50ZR18         97W         50K         BSW         27186         6.5 - 8.5         9.65 on 7.5         27.2         9         762 <td< th=""><td></td><td>275/40ZR17</td><td>98W</td><td>50K</td><td>BSW</td><td>17484</td><td>9 - 11</td><td>10.94 on 9.5</td><td>25.6</td><td>9</td><td>810</td><td>1653@51</td><td>380/A/A</td></td<>		275/40ZR17	98W	50K	BSW	17484	9 - 11	10.94 on 9.5	25.6	9	810	1653@51	380/A/A
225/45ZR18/XL         95W         50K         BSW         08419         7 - 8.5         8.86 on 7.5         25.9         9         802         1521@50         380/A/A           225/50ZR18         95W         50K         BSW         56022         6 - 8         9.17 on 7         26.8         9         774         1521@51         380/A/A           225/60ZR18         100W         50K         BSW         54634         6 - 8         8.98 on 6.5         28.6         9         727         1764@51         380/A/A           235/40ZR18/XL         95W         50K         BSW         04393         8 - 9.5         9.49 on 8.5         25.3         9         819         1521@50         380/A/A           235/45ZR18         94W         50K         BSW         14112         7.5 - 9         9.29 on 8         26.3         9         790         1477@51         380/A/A           235/50ZR18         97W         50K         BSW         27186         6.5 - 8.5         9.65 on 7.5         27.2         9         762         1609@51         380/A/A           245/40ZR18/XL         97W         50K         BSW         02208         8 - 9.5         9.76 on 8.5         25.7         9         809		215/45ZR18/XL	93W	50K	BSW	04233	7 - 8	8.39 on 7	25.6	9	812	1433@50	380/A/A
225/50ZR18         95W         50K         BSW         56022         6 - 8         9.17 on 7         26.8         9         774         1521@51         380/A/A           225/60ZR18         100W         50K         BSW         54634         6 - 8         8.98 on 6.5         28.6         9         727         1764@51         380/A/A           235/40ZR18/XL         95W         50K         BSW         04393         8 - 9.5         9.49 on 8.5         25.3         9         819         1521@50         380/A/A           235/45ZR18         94W         50K         BSW         14112         7.5 - 9         9.29 on 8         26.3         9         790         1477@51         380/A/A           235/50ZR18         97W         50K         BSW         27186         6.5 - 8.5         9.65 on 7.5         27.2         9         762         1609@51         380/A/A           245/40ZR18/XL         97W         50K         BSW         02208         8 - 9.5         9.76 on 8.5         25.7         9         809         1609@50         380/A/A		225/40ZR18/XL	92W	50K	BSW	20031	7.5 - 9	9.06 on 8	25	9	829	1389@50	380/A/A
225/60ZR18         100W         50K         BSW         54634         6 - 8         8.98 on 6.5         28.6         9         727         1764@51         380/A/A           235/40ZR18/XL         95W         50K         BSW         04393         8 - 9.5         9.49 on 8.5         25.3         9         819         1521@50         380/A/A           235/45ZR18         94W         50K         BSW         14112         7.5 - 9         9.29 on 8         26.3         9         790         1477@51         380/A/A           235/50ZR18         97W         50K         BSW         27186         6.5 - 8.5         9.65 on 7.5         27.2         9         762         1609@51         380/A/A           245/40ZR18/XL         97W         50K         BSW         02208         8 - 9.5         9.76 on 8.5         25.7         9         809         1609@50         380/A/A		225/45ZR18/XL	95W	50K	BSW	08419	7 - 8.5	8.86 on 7.5	25.9	9	802	1521@50	380/A/A
235/40ZR18/XL         95W         50K         BSW         04393         8 - 9.5         9.49 on 8.5         25.3         9         819         1521@50         380/A/A           235/45ZR18         94W         50K         BSW         14112         7.5 - 9         9.29 on 8         26.3         9         790         1477@51         380/A/A           235/50ZR18         97W         50K         BSW         27186         6.5 - 8.5         9.65 on 7.5         27.2         9         762         1609@51         380/A/A           245/40ZR18/XL         97W         50K         BSW         02208         8 - 9.5         9.76 on 8.5         25.7         9         809         1609@50         380/A/A		225/50ZR18	95W	50K	BSW	56022	6 - 8	9.17 on 7	26.8	9	774	1521@51	380/A/A
235/45ZR18         94W         50K         BSW         14112         7.5 - 9         9.29 on 8         26.3         9         790         1477@51         380/A/A           235/50ZR18         97W         50K         BSW         27186         6.5 - 8.5         9.65 on 7.5         27.2         9         762         1609@51         380/A/A           245/40ZR18/XL         97W         50K         BSW         02208         8 - 9.5         9.76 on 8.5         25.7         9         809         1609@50         380/A/A		225/60ZR18	100W	50K	BSW	54634	6 - 8	8.98 on 6.5	28.6	9	727	1764@51	380/A/A
235/50ZR18 97W 50K BSW 27186 6.5 - 8.5 9.65 on 7.5 27.2 9 762 1609@51 380/A/A 245/40ZR18/XL 97W 50K BSW 02208 8 - 9.5 9.76 on 8.5 25.7 9 809 1609@50 380/A/A		235/40ZR18/XL	95W	50K	BSW	04393	8 - 9.5	9.49 on 8.5	25.3	9	819	1521@50	380/A/A
245/40ZR18/XL 97W 50K BSW 02208 8 - 9.5 9.76 on 8.5 25.7 9 809 1609@50 380/A/A		235/45ZR18	94W	50K	BSW	14112	7.5 - 9	9.29 on 8	26.3	9	790	1477@51	380/A/A
		235/50ZR18	97W	50K	BSW	27186	6.5 - 8.5	9.65 on 7.5	27.2	9	762	1609@51	380/A/A
045/457040 0004 507 0004 47000 7.5 0 0.57 0 0.0 0.0 700 450564 000/4/4		245/40ZR18/XL	97W	50K	BSW	02208	8 - 9.5	9.76 on 8.5	25.7	9	809	1609@50	380/A/A
245/45ZR18 96W 50K BSW 17920 7.5 - 9 9.57 0118 26.6 9 780 1565@51 380/A/A		245/45ZR18	96W	50K	BSW	17920	7.5 - 9	9.57 on 8	26.6	9	780	1565@51	380/A/A

#### UNIROYAL® TIGER PAW® GTZ ALL SEASON 2

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE- WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/ 32NDS)	REV/ MILE @45 MPH	Max Load Single (LBS@PSI)	UTQG
245/50ZR18	100Y	50K	BSW	25794	7 - 8.5	9.96 on 7.5	27.6	9	751	1264@51	380/A/A
255/35ZR18/XL	94W	50K	BSW	45115	8.5 - 10	10.24 on 9	25	9	832	1477@50	380/A/A
255/40ZR18	95W	50K	BSW	83255	8.5 - 10	10.24 on 9	26	9	799	1521@51	380/A/A
255/45ZR18	99W	50K	BSW	70700	8 - 9.5	10.04 on 8.5	27	9	769	1709@51	380/A/A
265/35ZR18	93Y	50K	BSW	77050	9 - 10.5	10.67 on 9.5	25.3	9	822	1433@51	380/A/A
275/35ZR18	95Y	50K	BSW	38728	9 - 11	10.94 on 9.5	25.5	9	814	1521@51	380/A/A
275/40ZR18	99W	50K	BSW	06902	9 - 11	10.94 on 9.5	26.6	9	780	1709@51	380/A/A
225/40ZR19/XL	93Y	50K	BSW	27408	7.5 - 9	9.06 on 8	26.1	9	797	1433@50	380/A/A
225/45ZR19/XL	96W	50K	BSW	11312	7 - 8.5	8.86 on 7.5	26.9	9	771	1565@50	380/A/A
235/35ZR19/XL	91Y	50K	BSW	38697	8 - 9.5	9.49 on 8.5	25.4	9	817	1356@50	380/A/A
235/40ZR19/XL	96W	50K	BSW	25458	8 - 9.5	9.49 on 8.5	26.4	9	787	1565@50	380/A/A
245/35ZR19/XL	93Y	50K	BSW	63519	8 - 9.5	9.76 on 8.5	25.7	9	807	1433@50	380/A/A
245/40ZR19/XL	98Y	50K	BSW	96721	8 - 9.5	9.76 on 8.5	26.7	9	778	1653@50	380/A/A
245/45ZR19/XL	102Y	50K	BSW	69680	7.5 - 9	9.57 on 8	27.6	9	751	1874@50	380/A/A
245/50ZR19/XL	105W	50K	BSW	13011	7 - 8.5	9.96 on 7.5	28.7	9	725	2039@50	380/A/A
255/35ZR19/XL	96Y	50K	BSW	02738	8.5 - 10	10.24 on 9	26	9	799	1565@50	380/A/A
255/40ZR19/XL	100Y	50K	BSW	67817	8.5 - 10	10.24 on 9	27	9	769	1764@50	380/A/A
275/35ZR19/XL	100Y	50K	BSW	72775	9 - 11	10.94 on 9.5	26.5	9	783	1764@50	380/A/A
275/40ZR19	101Y	50K	BSW	53971	9 - 11	10.94 on 9.5	27.6	9	751	1819@51	380/A/A
285/35ZR19/XL	103Y	50K	BSW	03879	9.5 - 11	11.42 on 10	26.8	9	774	1929@50	380/A/A
245/35ZR20/XL	95Y	50K	BSW	39058	8 - 9.5	9.76 on 8.5	26.7	9	777	1521@50	380/A/A
245/40ZR20/XL	99Y	50K	BSW	23474	8 - 9.5	9.76 on 8.5	27.7	9	750	1709@50	380/A/A
245/45ZR20/XL	103Y	50K	BSW	26922	7.5 - 9	9.57 on 8	28.6	9	726	1929@50	380/A/A
255/35ZR20/XL	97Y	50K	BSW	95382	8.5 - 10	10.24 on 9	27	9	770	1609@50	380/A/A
255/45ZR20/XL	105Y	50K	BSW	59475	8 - 9.5	10.04 on 8.5	29	9	716	2039@50	380/A/A
265/35ZR20/XL	99Y	50K	BSW	73158	9 - 10.5	10.67 on 9.5	27.3	9	761	1709@50	380/A/A
275/35ZR20/XL	102Y	50K	BSW	87832	9 - 11	10.94 on 9.5	27.5	9	755	1874@50	380/A/A

# EVERY GENERATION DISCOVERS UNIROYAL.

FROM TRUCKS TO SUVS TO CARS, WE HAVE YOU COVERED.



UNIROYAL®

# **TIGER PAW® TOURING A/S**

Our long-lasting all-season tire designed for your everyday needs.









#### **FEATURES AND BENEFITS**

Long-lasting treadlife, backed by a 75,000-mile warranty for H speed rated and 65,000-mile warranty for V speed rated.

Tru-Last Technology gives you long, even treadwear by managing stress within the tire footprint.

- Confidence in any weather condition. All-season compound combined with a high sipe density for maximum biting edges.
- Comfort, quality and peace-of-mind everyday. Tire footprint shape balanced with an optimized tread pattern design.

#### **MSPN COUNT** PER RIM SIZE



#### PRODUCT COVERAGE

UNIROYAL® TIGER PAW® Touring A/S will have an estimated 90% market coverage across PC, CUV and small/medium SUV segments, allowing you to fit most vehicles on the road in America today with a single product line.

#### UNIROYAL® TIGER PAW® TOURING A/S

		TAW TOO	1.36.07 474	3 11 21/3		(6)						
TIRE SIZ	E	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE- WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/ 32NDS)	REV/ MILE @45 MPH	Max Load Single (LBS@PSI)	UTQG
175/65R <sup>-</sup>	14	82H	75K	BSW	35584	5 - 6	6.97 on 5	22.9	11.5	905	1047@44	700/A/A
185/60R <sup>-</sup>	4	82H	75K	BSW	36038	5 - 6.5	7.44 on 5.5	22.7	11.5	914	1047@44	700/A/A
185/65R1	14	86H	75K	BSW	37647	5 - 6.5	7.44 on 5.5	23.4	11.5	887	1168@44	700/A/A
175/65R1	5	84H	75K	BSW	65138	5 - 6	6.97 on 5	23.9	11.5	867	1102@44	700/A/A
185/55R1	15	82V	65K	BSW	24851	5 - 6.5	7.64 on 6	23	10.5	903	1047@44	600/A/A
185/60R <sup>-</sup>	5	84H	75K	BSW	26635	5 - 6.5	7.44 on 5.5	23.7	11.5	876	1102@44	700/A/A
185/65R <sup>-</sup>	15	88H	75K	BSW	04683	5 - 6.5	7.44 on 5.5	24.4	11.5	851	1235@44	700/A/A
195/55R <sup>-</sup>	5	85V	65K	BSW	04341	5.5 - 7	7.91 on 6	23.4	10.5	888	1135@44	600/A/A
195/60R <sup>-</sup>	15	88H	75K	BSW	43238	5.5 - 7	7.91 on 6	24.2	11.5	859	1235@44	700/A/A
195/65R <sup>-</sup>	5	91H	75K	BSW	59865	5.5 - 7	7.91 on 6	25	11.5	832	1356@44	700/A/A
205/60R <sup>-</sup>	15	91H	75K	BSW	07144	5.5 - 7.5	8.23 on 6	24.6	11.5	842	1356@44	700/A/A
205/65R <sup>-</sup>	5	94H	75K	BSW	20887	5.5 - 7.5	8.23 on 6	25.4	11.5	817	1477@44	700/A/A
215/60R <sup>-</sup>	15	94H	75K	BSW	04287	6 - 7.5	8.7 on 6.5	25.1	11.5	827	1477@44	700/A/A
215/65R <sup>-</sup>	5	96H	75K	BSW	96020	6 - 7.5	8.7 on 6.5	26	11.5	799	1565@44	700/A/A
195/50R <sup>-</sup>	16	84V	65K	BSW	54780	5.5 - 7	7.91 on 6	23.7	11.5	878	1102@51	600/A/A
205/50R	6	87H	75K	BSW	00722	5.5 - 7.5	8.43 on 6.5	24	11.5	863	1201@44	700/A/A
205/55R <sup>-</sup>	16	91H	75K	BSW	01571	5.5 - 7.5	8.43 on 6.5	24.8	11.5	836	1356@44	700/A/A
205/55R <sup>-</sup>	6	91V	65K	BSW	01318	5.5 - 7.5	8.43 on 6.5	24.8	10.5	836	1356@44	600/A/A
205/60R <sup>-</sup>	16	92H	75K	BSW	05599	5.5 - 7.5	8.23 on 6	25.6	11.5	810	1389@44	700/A/A
205/65R <sup>-</sup>	6	95H	75K	BSW	76774	5.5 - 7.5	8.23 on 6	26.4	11.5	786	1521@44	700/A/A
215/55R16	i/XL	97H	75K	BSW	19806	6 - 7.5	8.9 on 7	25.2	11.5	823	1609@50	700/A/A
215/60R <sup>-</sup>	6	95H	75K	BSW	80398	6 - 7.5	8.7 on 6.5	26.1	11.5	796	1521@44	700/A/A
215/60R <sup>-</sup>	16	95V	65K	BSW	95437	6 - 7.5	8.7 on 6.5	26.1	10.5	796	1521@44	600/A/A
215/65R <sup>-</sup>	6	98H	75K	BSW	53849	6 - 7.5	8.7 on 6.5	27	11.5	770	1653@44	700/A/A
225/60R <sup>-</sup>	16	98H	75K	BSW	66985	6 - 8	8.98 on 6.5	26.6	11.5	782	1653@44	700/A/A
225/60R <sup>-</sup>	6	98V	65K	BSW	17496	6 - 8	8.98 on 6.5	26.6	10.5	782	1653@44	600/A/A
225/65R <sup>-</sup>	16	100H	75K	BSW	90665	6 - 8	8.98 on 6.5	27.4	11.5	757	1764@44	700/A/A

#### UNIROYAL® TIGER PAW® TOURING A/S

300		All the second		- Jan	200	and the second second	The state of the s	The state of the s	A SECTION AND A SECTION ASSESSMENT				4.
	TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE- WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/ 32NDS)	REV/ MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG	WILLIAM TO AND THE AND
	225/70R16	103H	75K	BSW	39352	6 - 7.5	8.98 on 6.5	28.4	11.5	732	1929@44	700/A/A	
	235/65R16	103H	75K	BSW	83541	6.5 - 8.5	9.45 on 7	28	11.5	742	1929@44	700/A/A	
	235/65R16	103V	65K	BSW	58570	6.5 - 8.5	9.45 on 7	28	10.5	742	1929@44	600/A/A	
	205/45R17	84V	65K	BSW	02921	6.5 - 7.5	8.11 on 7	24.2	11.5	858	1102@51	600/A/A	
	215/55R17	94H	75K	BSW	28075	6 - 7.5	8.9 on 7	26.3	11.5	791	1477@44	700/A/A	
	215/55R17	94V	65K	BSW	08562	6 - 7.5	8.9 on 7	26.3	10.5	791	1477@44	600/A/A	
60	225/45R17	91H	75K	BSW	02130	7 - 8.5	8.86 on 7.5	24.9	11.5	833	1356@44	700/A/A	
	225/50R17	94V	65K	BSW	00864	6 - 8	9.17 on 7	25.9	10.5	803	1477@44	600/A/A	
	225/55R17	97H	75K	BSW	53102	6 - 8	9.17 on 7	26.7	11.5	777	1609@44	700/A/A	THE PLANT OF
	225/60R17	99H	75K	BSW	03381	6 - 8	8.98 on 6.5	27.6	11.5	753	1709@44	700/A/A	
	225/60R17	99V	65K	BSW	03183	6 - 8	8.98 on 6.5	27.6	10.5	753	1709@44	600/A/A	
	225/65R17	102H	75K	BSW	26161	6 - 8	8.98 on 6.5	28.5	11.5	730	1874@44	700/A/A	N. Indian
	235/55R17	99H	75K	BSW	02151	6.5 - 8.5	9.65 on 7.5	27.1	11.5	766	1709@44	700/A/A	
	235/60R17	102H	75K	BSW	40877	6.5 - 8.5	9.45 on 7	28.1	11.5	740	1874@44	700/A/A	
	235/65R17	104H	75K	BSW	21821	6.5 - 8.5	9.45 on 7	29	11.5	716	1984@44	700/A/A	1000
	245/45R17/XL	99V	65K	BSW	73090	7.5 - 9	9.57 on 8	25.6	10.5	810	1709@50	600/A/A	
	245/65R17	107H	75K	BSW	27659	7 - 8.5	9.76 on 7	29.5	11.5	704	2149@44	700/A/A	
	265/70R17	115H	75K	BSW	99457	7 - 9	10.71 on 8	31.6	11.5	657	2039@44	700/A/A	
	215/55R18	95H	75K	BSW	23044	6 - 7.5	8.9 on 7	27.2	11.5	762	1521@44	700/A/A	
	225/45R18/XL	95V	65K	BSW	97324	7 - 8.5	8.86 on 7.5	25.9	10.5	802	1521@50	600/A/A	
	225/50R18	95V	65K	BSW	35125	6 - 8	9.17 on 7	26.8	10.5	774	1521@44	600/A/A	
	225/55R18	98H	75K	BSW	02830	6 - 8	9.17 on 7	27.7	11.5	749	1653@44	700/A/A	
	225/60R18	100H	75K	BSW	34634	6 - 8	8.98 on 6.5	28.6	11.5	727	1764@44	700/A/A	
	225/60R18	100V	65K	BSW	31800	6 - 8	8.98 on 6.5	28.6	10.5	727	1764@44	600/A/A	
	235/50R18	97V	65K	BSW	92032	6.5 - 8.5	9.65 on 7.5	27.2	10.5	762	1609@44	600/A/A	
	235/60R18	103H	75K	BSW	37225	6.5 - 8.5	9.45 on 7	29	11.5	715	1929@44	700/A/A	The state of the s
	235/60R18	103V	65K	BSW	04171	6.5 - 8.5	9.45 on 7	29	10.5	715	1929@44	600/A/A	
	235/65R18	106V	65K	BSW	67507	6.5 - 8.5	9.45 on 7	30	10.5	692	2094@44	600/A/A	

Refer to the "Important Product Information" section at the back of the book.

#### UNIROYAL® TIGER PAW® TOURING A/S

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE- WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/ 32NDS)	REV/ MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
245/60R18	105V	65K	BSW	14389	7 - 8.5	9.76 on 7	29.5	10.5	703	2039@44	600/A/A
255/55R18	105H	75K	BSW	51237	7 - 9	10.43 on 8	29	11.5	717	2039@44	700/A/A
255/55R18	105V	65K	BSW	84067	7 - 9	10.43 on 8	29	10.5	717	2039@44	600/A/A
255/60R18	108H	75K	BSW	18563	7 - 9	10.24 on 7.5	30	11.5	692	2039@44	700/A/A
255/65R18	111H	75K	BSW	76471	7 - 9	10.24 on 7.5	31	11.5	670	2205@44	700/A/A
255/70R18	113H	75K	BSW	22132	6.5 - 8.5	10.24 on 7.5	32	11.5	648	2271@44	700/A/A
265/60R18	110V	65K	BSW	44083	7.5 - 9.5	10.71 on 8	30.5	10.5	682	2403@44	600/A/A
265/65R18	114H	75K	BSW	52191	7.5 - 9.5	10.71 on 8	31.5	11.5	659	2601@44	700/A/A
235/40R19/XL	96V	65K	BSW	75093	8 - 9.5	9.49 on 8.5	26.4	10.5	787	1565@50	600/A/A
235/45R19	95V	65K	BSW	08507	7.5 - 9	9.29 on 8	27.3	10.5	760	1521@44	600/A/A
235/55R19	101V	65K	BSW	49521	6.5 - 8.5	9.65 on 7.5	29.1	10.5	713	1819@44	600/A/A
245/40R19	94V	65K	BSW	64189	8 - 9.5	9.76 on 8.5	26.7	10.5	778	1477@44	600/A/A
245/55R19	103V	65K	BSW	64420	7 - 8.5	9.96 on 7.5	29.6	10.5	702	1929@44	600/A/A
255/45R19	100V	65K	BSW	36294	8 - 9.5	10.04 on 8.5	28	10.5	741	1764@44	600/A/A
255/50R19/XL	107V	65K	BSW	58785	7 - 9	10.43 on 8	29	10.5	715	2149@50	600/A/A
255/60R19	109H	75K	BSW	66476	7 - 9	10.24 on 7.5	31	11.5	670	2149@44	700/A/A
235/55R20	102H	75K	BSW	41360	6.5 - 8.5	9.65 on 7.5	30.1	11.5	690	1874@44	700/A/A
245/45R20	99V	65K	BSW	58689	7.5 - 9	9.57 on 8	28.6	10.5	726	1709@44	600/A/A
245/50R20	102V	65K	BSW	35428	7 - 8.5	9.96 on 7.5	29.6	10.5	701	1874@44	600/A/A
245/60R20	107H	75K	BSW	66230	7 - 8.5	9.76 on 7	31.5	11.5	659	2149@44	700/A/A
255/50R20	105V	65K	BSW	66571	7 - 9	10.43 on 8	30	10.5	691	2039@44	600/A/A
255/55R20	107H	75K	BSW	56959	7 - 9	10.43 on 8	31	11.5	671	2149@44	700/A/A
265/50R20	107V	65K	BSW	08531	7.5 - 9.5	10.91 on 8.5	30.4	10.5	683	2149@44	600/A/A
275/55R20	113H	75K	BSW	40764	7.5 - 9.5	11.18 on 8.5	31.8	11.5	652	2535@44	700/A/A
275/60R20	115H	75K	BSW	91200	7.5 - 9.5	10.98 on 8	32.9	11.5	630	2679@44	700/A/A
265/40R21/XL	105V	65K	BSW	05391	9 - 10.5	10.67 on 9.5	29.3	10.5	709	2039@50	600/A/A
275/40R21/XL	107V	65K	BSW	28508	9 - 11	10.94 on 9.5	29.6	10.5	702	2149@50	600/A/A
285/45R22/XL	114H	75K	BSW	38883	9 - 10.5	11.22 on 9.5	32	11.5	648	2601@50	700/A/A

UNIROYAL®

# **TIGER PAW® AWP II**

A long time favorite available with a classic white sidewall design.









#### **FEATURES AND BENEFITS**

- All-Season tire available with a classic white sidewall design. All-Season tread compound.
- Delivers a quiet and comfortable ride. Computer-phased tread design.
- Long, even treadwear with a 65,000-mile warranty. Optimized footprint shape.

#### There's 125 years of history behind our tires.

Founded in 1892 as the U.S. Rubber Company, we've been making tires for almost as long as there have been automobiles to put them on and roads to drive on. Over all those years and over all those miles, we've become a trusted brand in the lives of millions of American drivers.

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE- WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/ 32NDS)	REV/ MILE @45 MPH	Max Load Single (LBS@PSI)	UTQG
P155/80R13	79S	65K	WSW	28072	4 - 5	6.2 on 4.5	22.8	8.5	914	959@44	560/A/B
P175/70R13	82T	65K	BSW	35705	4.5 - 6	7 on 5	22.7	11	917	1036@44	560/A/B
P175/70R14	84T	65K	BSW	08059	4.5 - 6	7 on 5	23.7	10.5	878	1102@44	600/A/B
P185/70R14	87T	65K	BSW	03525	4.5 - 6	7.4 on 5.5	24.3	11	858	1201@44	620/A/B
P185/70R14	87T	65K	WSW	04910	4.5 - 6	7.4 on 5.5	24.3	11	858	1201@44	620/A/B
P185/75R14	898	65K	WSW	58787	4.5 - 6	7.2 on 5	25	11	833	1290@44	620/A/B
P195/65R14	88T	65K	BSW	06039	5.5 - 7	7.9 on 6	24	10.5	866	1235@44	620/A/B
P195/70R14	90T	65K	BSW	03330	5 - 6.5	7.9 on 6	24.8	11	839	1312@44	620/A/B
P195/75R14	92S	65K	WSW	48403	5 - 6.5	7.7 on 5.5	25.5	11	815	1400@44	620/A/B
P205/70R14	93T	65K	BSW	13155	5 - 7	8.2 on 6	25.4	11.5	821	1433@44	620/A/B
P205/75R14	958	65K	WSW	11937	5 - 7	8 on 5.5	26.1	11.5	796	1532@44	620/A/B
P215/70R14	96T	65K	WSW	28435	5.5 - 7	8.7 on 6.5	25.9	11.5	803	1554@44	620/A/B
P205/75R15	97S	65K	WSW	10183	5 - 7	8 on 5.5	27.1	11.5	767	1598@44	620/A/B
P215/60R15	93T	65K	BSW	16494	6 - 7.5	8.7 on 6.5	25.2	10.5	827	1411@44	620/A/B
P215/65R15	95T	65K	BSW	03300	6 - 7.5	8.7 on 6.5	26	10.5	799	1510@44	620/A/B
P215/70R15	97T	65K	WSW	33471	5.5 - 7	8.7 on 6.5	26.9	11.5	774	1620@44	620/A/B



# **TIGER PAW®** ICE & SNOW™ 3

UNIROYAL® TIGER PAW® Ice & Snow™ 3, the affordable winter tire, providing enhanced dependability in all winter conditions — snow, 1 ice, 2 and wet. 3









#### Enhanced traction in snow and on ice.

Highly siped tread surface with 3D interlocking shoulder sipes and wide lateral tread grooves. Molded for studs (size #12 studs, where permitted by law).

#### Improved grip in cold weather.

Latest winter compound technology that maintains molecular adhesion and tread flexibility at low temperatures.

Durable and reliable in all winter conditions. Patented DuraShield® construction.



To offer enhanced traction on packed snow1 and ice2



TIRE SIZE	SERVICE Description	LIMITED Warranty	SIDE- Wall	MSPN	RIM Width Range (Inches)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/ 32NDS)	REV/ MILE @45 MPH	MAX LOAD Single (LBS@PSI)	UTQG
185/65R14	86T	STD	BSW	64287	5 - 6.5	7.44 on 5.5	23.4	11	887	1168@44	
175/65R15	84T	STD	BSW	64920	5 - 6	6.97 on 5	23.9	11	867	1102@44	
185/60R15	84T	STD	BSW	52003	5 - 6.5	7.44 on 5.5	23.7	11	876	1102@44	
185/65R15	88T	STD	BSW	87554	5 - 6.5	7.44 on 5.5	24.4	11	851	1235@44	
195/60R15	88T	STD	BSW	76289	5.5 - 7	7.91 on 6	24.2	11	859	1235@44	
195/65R15	91T	STD	BSW	58288	5.5 - 7	7.91 on 6	25	11	832	1356@44	
205/65R15	94T	STD	BSW	18303	5.5 - 7.5	8.23 on 6	25.4	11	817	1477@44	
205/70R15	96T	STD	BSW	89954	5 - 7	8.23 on 6	26.3	11	790	1565@44	

Based on third-party snow traction tests using ASTM Test Method F1805-12 in size 205/55R16 91T versus previous generation UNIROYAL® TIGER PAW® Ice & Snow™ II Tire in size 205/55R16 91S. Actual on-road results may vary.

<sup>&</sup>lt;sup>2</sup> Based on third-party ice traction and snow traction tests using ASTM Test Method F1805-12 in size 205/55R16 91T versus previous generation UNIROYAL® TIGER PAW® Ice & Snow™ II Tire in size 205/55R16 91S. Actual on road results may vary

Based on internal wet braking results from both 80 km/h and 96 km/h using a 2013 Honda Civic in size 205/55R16 91T verst previous generation UNIROYAL® TIGER PAW® Ice & Snow™ II Tire in size 205/55R16 91S. Actual on-road results may vary.

#### UNIROYAL® TIGER PAW® ICE & SNOW™ 3

TIRE SIZE   SERVICE   LIMITED   WARRANTY   SIDE   WALL   WSPN   RIM WIDTH RANGE (INCHES)   WIDTH RANGE (INCHES)	E LOAD SINGLE (LBS@PSI)  4 1653@44  6 1356@44  0 1389@44  1521@44  3 1433@44  6 1521@44
205/55R16         91T         STD         BSW         04924         5.5 - 7.5         8.43 on 6.5         24.8         11         83           205/60R16         92T         STD         BSW         05966         5.5 - 7.5         8.23 on 6         25.6         11         81           205/65R16         95T         STD         BSW         74361         5.5 - 7.5         8.23 on 6         26.4         11         78           215/55R16         93T         STD         BSW         48513         6 - 7.5         8.9 on 7         25.2         11         82           215/60R16         95T         STD         BSW         54535         6 - 7.5         8.7 on 6.5         26.1         11         79           215/65R16         98T         STD         BSW         07693         6 - 7.5         8.7 on 6.5         27         11         77           215/70R16         100T         STD         BSW         09658         5.5 - 7         8.7 on 6.5         27.8         11         74	5 1356@44 0 1389@44 6 1521@44 3 1433@44 6 1521@44 0 1653@44
205/60R16         92T         STD         BSW         05966         5.5 - 7.5         8.23 on 6         25.6         11         81           205/65R16         95T         STD         BSW         74361         5.5 - 7.5         8.23 on 6         26.4         11         78           215/55R16         93T         STD         BSW         48513         6 - 7.5         8.9 on 7         25.2         11         82           215/60R16         95T         STD         BSW         54535         6 - 7.5         8.7 on 6.5         26.1         11         79           215/65R16         98T         STD         BSW         07693         6 - 7.5         8.7 on 6.5         27         11         77           215/70R16         100T         STD         BSW         09658         5.5 - 7         8.7 on 6.5         27.8         11         74	1389@44 6 1521@44 3 1433@44 6 1521@44 0 1653@44
205/65R16         95T         STD         BSW         74361         5.5 - 7.5         8.23 on 6         26.4         11         78           215/55R16         93T         STD         BSW         48513         6 - 7.5         8.9 on 7         25.2         11         82           215/60R16         95T         STD         BSW         54535         6 - 7.5         8.7 on 6.5         26.1         11         79           215/65R16         98T         STD         BSW         07693         6 - 7.5         8.7 on 6.5         27         11         77           215/70R16         100T         STD         BSW         09658         5.5 - 7         8.7 on 6.5         27.8         11         74	1521@44 3 1433@44 6 1521@44 0 1653@44
215/55R16         93T         STD         BSW         48513         6 - 7.5         8.9 on 7         25.2         11         82           215/60R16         95T         STD         BSW         54535         6 - 7.5         8.7 on 6.5         26.1         11         79           215/65R16         98T         STD         BSW         07693         6 - 7.5         8.7 on 6.5         27         11         77           215/70R16         100T         STD         BSW         09658         5.5 - 7         8.7 on 6.5         27.8         11         74	3 1433@44 6 1521@44 0 1653@44
215/60R16         95T         STD         BSW         54535         6 - 7.5         8.7 on 6.5         26.1         11         79           215/65R16         98T         STD         BSW         07693         6 - 7.5         8.7 on 6.5         27         11         77           215/70R16         100T         STD         BSW         09658         5.5 - 7         8.7 on 6.5         27.8         11         74	6 1521@44 0 1653@44
215/65R16         98T         STD         BSW         07693         6 - 7.5         8.7 on 6.5         27         11         77           215/70R16         100T         STD         BSW         09658         5.5 - 7         8.7 on 6.5         27.8         11         74	) 1653@44
215/70R16 100T STD BSW 09658 5.5 - 7 8.7 on 6.5 27.8 11 74	
	1764@44
225/60R16 98T STD BSW 39721 6 - 8 8.98 on 6.5 26.6 11 78	
	2 1653@44
225/65R16 100T STD BSW 06989 6 - 8 8.98 on 6.5 27.4 11 75	7 1764@44
_ 245/75R16 111T STD BSW 08977 6.5 - 8 9.76 on 7 30.4 11 68	3 2403@44
205/50R17 89T STD BSW 02677 5.5 - 7.5 8.43 on 6.5 25.1 11 82	3 1279@44
205/55R17 91H STD BSW 09240 5.5 - 7.5 8.43 on 6.5 25.9 11 80	3 1356@44
215/55R17 94T STD BSW 90776 6 - 7.5 8.9 on 7 26.3 11 79	1477@44
215/60R17 96T STD BSW 34580 6 - 7.5 8.7 on 6.5 27.1 11 76	6 1565@44
215/65R17 99T STD BSW 51387 6 - 7.5 8.7 on 6.5 28 11 74	2 1709@44
225/45R17 91T STD BSW 72269 7 - 8.5 8.86 on 7.5 24.9 11 83	3 1356@44
225/50R17 94T STD BSW 11044 6 - 8 9.17 on 7 25.9 11 80	3 1477@44
225/55R17 97T STD BSW 00595 6 - 8 9.17 on 7 26.7 11 77	7 1609@44
225/60R17 99T STD BSW 68607 6 - 8 8.98 on 6.5 27.6 11 75	3 1709@44
225/65R17 102T STD BSW 67643 6 - 8 8.98 on 6.5 28.5 11 73	1874@44
235/55R17 99T STD BSW 29839 6.5 - 8.5 9.65 on 7.5 27.1 11 76	6 1709@44
235/60R17 102T STD BSW 62162 6.5 - 8.5 9.45 on 7 28.1 11 74	1874@44
235/65R17 104T STD BSW 88464 6.5 - 8.5 9.45 on 7 29 11 71	5 1984@44
245/65R17 107T STD BSW 96308 7 - 8.5 9.76 on 7 29.5 11 70	4 2149@44
265/70R17 115T STD BSW 19741 7 - 9 10.71 on 8 31.6 11 65	7 2679@44
235/55R18 100T STD BSW 45679 6.5 - 8.5 9.65 on 7.5 28.1 11 73	9 1764@44
235/60R18 103T STD BSW 14683 6.5 - 8.5 9.45 on 7 29 11 71:	5 1929@44
245/60R18 105T STD BSW 71321 7 - 8.5 9.76 on 7 29.5 11 70	3 2039@44
245/60R18 105T STD BSW 59549 7 - 8.5 9.76 on 7 29.5 11 70	3 2039@44
P275/65R18 114T STD BSW 32436 7.5 - 9.5 10.98 on 8 32 11 64	3 2601@44
235/40R19 92V STD BSW 07838 8 - 9.5 9.49 on 8.5 26.4 11 78	7 1389@44
235/55R19 101T STD BSW 21875 6.5 - 8.5 9.65 on 7.5 29.1 11 71:	3 1819@44

Refer to the "Important Product Information" section at the back of the book.



- A comfortable and quiet highway ride. Computer-phased tread design.
- Evacuates water fast for optimal traction on wet pavement.
  Wide, circumferential (tread) grooves.
- Offers durability and reliability on the road, with a 60,000-mile manufacturer's limited warranty. Solid shoulder tread block design.

#### The perfect tire for your everyday adventures.

For more than a century, we've been getting drivers to important places, even if it's just to drop the kids off or to pick up the groceries. The UNIROYAL® LAREDO® Cross Country Tour is for those SUV, CUV and light truck drivers who may be off-loading more than off-roading, but who still need a hard-working tire.



#### UNIROYAL® LAREDO® CROSS COUNTRY TOUR

		21	NACON S		F 1			200°91				**************************************
	TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE- WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/ 32NDS)	REV/ MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
	P225/70R15	100T	60K	ORWL	67118	6 - 7.5	9 on 6.5	27.4	12.5	758	1594@44	540/A/B
	P235/70R15	102T	60K	ORWL	00648	6 - 8	9.5 on 7	28	12.5	743	1724@44	540/A/B
	235/75R15/XL	109T	60K	ORWL	97570	6 - 8	9.25 on 6.5	28.8	12.5	721	2065@50	540/A/B
è	P215/70R16	99T	60K	BSW	31724	5.5 - 7	8.7 on 6.5	27.9	12.5	746	1554@44	540/A/B
	P225/70R16	101T	60K	ORWL	83997	6 - 7.5	9 on 6.5	28.4	12.5	732	1654@44	540/A/B
	225/75R16/XL	108T	60K	ORWL	18728	6 - 7.5	8.78 on 6	29.2	12.5	710	2005@50	540/A/B
	P235/65R16	101T	60K	BSW	42459	6.5 - 8.5	9.5 on 7	28	12.5	742	1654@44	540/A/B
	235/70R16	106T	60K	BSW	56182	6 - 8	9.5 on 7	29	11	718	1904@44	540/B/A
	245/70R16	107T	60K	BSW	06238	6.5 - 8	9.8 on 7	29.5	11	704	1955@44	540/B/A
	245/75R16	111T	60K	BSW	70772	6.5 - 8	9.8 on 7	30.5	11	683	2185@44	540/B/A
	265/70R16	112T	60K	ORWL	68386	7 - 9	10.7 on 8	30.6	12.5	679	2245@44	540/A/B
	225/65R17	102T	60K	BSW	64935	6 - 8	9 on 6.5	28.5	12.5	730	1704@44	540/A/B
	P235/60R17	100T	60K	BSW	62794	6.5 - 8.5	9.5 on 7	28.1	12.5	740	1604@44	540/A/B
	P235/65R17	103T	60K	BSW	40065	6.5 - 8.5	9.5 on 7	29.1	12.5	716	1754@44	540/A/B
	245/65R17	107T	60K	BSW	08221	7 - 8.5	9.8 on 7	29.5	11	704	1955@44	540/B/A
	255/65R17	110T	60K	ORWL	87325	7 - 9	10.2 on 7.5	30.1	12.5	691	2125@44	540/A/B
	265/65R17	112T	60K	BSW	36288	7.5 - 9.5	10.7 on 8	30.6	11	681	2245@44	540/B/A
	265/70R17	115T	60K	BSW	33585	7 - 9	10.7 on 8	31.7	11	657	2436@44	540/B/A
	P235/60R18	102T	60K	BSW	31514	6.5 - 8.5	9.5 on 7	29.1	12.5	715	1704@44	540/A/B
	P235/65R18	104T	60K	BSW	24461	6.5 - 8.5	9.5 on 7	30	12.5	692	1804@44	540/A/B
	255/65R18	111T	60K	BSW	26607	7 - 9	10.2 on 7.5	31.1	12.5	669	2185@44	540/A/B
	245/55R19	103T	60K	BSW	10330	7 - 8.5	10 on 7.5	29.7	12.5	702	1754@44	540/A/B
	P245/50R20	102T	60K	BSW	24129	7 - 8.5	10 on 7.5	29.7	12.5	701	1704@44	540/A/B
	275/55R20	113T	60K	BSW	52100	7.5 - 9.5	11.2 on 8.5	31.9	12.5	652	2305@44	540/A/B

Refer to the "Important Product Information" section at the back of the book.



- **Long, even treadwear.**Solid shoulder tread block design.
- Enhances off-pavement traction and helps improve tread life.
  Full tread depth.
- Wet grip and all-season traction that sticks to the road. Optimized tread compound.

TIRE SIZE	SERVICE DESCRIPTION	LIMITED WARRANTY	SIDE- WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/ 32NDS)	REV/ MILE @45 MPH	Max Load Single (LBS@PSI)	UTQG
P215/75R15	100S	55K	ORWL	44847	5.5 - 7	8.5 on 6	27.7	13	751	1584@44	540/A/B
P235/75R16/XL	109S	55K	ORWL	88558	6 - 8	9.3 on 6.5	29.8	13	697	2065@50	540/A/B
P265/75R16	114S	55K	ORWL	93470	7 - 9	10.5 on 7.5	31.7	13	657	2365@44	540/A/B
31x10.50R15/C	109R	50K	ORWL	91266	7 - 9	10.5 on 8.5	30.5	15	682	2270@50	
LT265/75R16/E	123/120R	50K	ROWL	90382	7 - 8	10.5 on 7.5	31.7	15	657	3415@80	
LT285/75R16/D	122/119R	50K	ROWL	89654	7.5 - 9	11.3 on 8	32.8	16	634	3305@65	





- Absorbs impacts and carries heavy loads. Two polyester carcass plies.
- Provides all-season traction.
  Deep Lateral grooves and sipes.
- **Delivers long, even treadwear.**Solid shoulder tread block design.

## Tires so tough we named them after our testing track.

The UNIROYAL® LAREDO® brand of tires got its name from our 5-mile testing track in Laredo, Texas. We've tested our CUV/SUV/light truck tires to make sure you can get almost anywhere on these durable tires.

TIRE SIZE	SERVICE DESCRIPTION	LIMITED Warranty	SIDE- WALL	MSPN	RIM WIDTH RANGE (INCHES)	SECTION WIDTH ON MEASURING RIM WIDTH (INCHES)	OVERALL DIAMETER (INCHES)	TREAD DEPTH (IN/ 32NDS)	REV/ MILE @45 MPH	MAX LOAD SINGLE (LBS@PSI)	UTQG
LT225/75R16/E	115/112S	50K	BSW	97652	6 - 7	8.8 on 6	29.1	13	715	2680@80	





#### **SPEED RATING REFERENCE TABLE**

SPEED SYMBOL	SPEED CATEGORY (MAX SPEED)	OPEN ENDED SPEED CATEGORY
Q	100 mph	
R	106 mph	
S	112 mph	
Т	118 mph	
U	124 mph	
Н	130 mph	
V	149 mph	
W	168 mph	*ZR
Υ	186 mph	
(Y)	Above 186 mph	<b>↓</b>

#### \*ZR Speed Rating Defined

For tires having a maximum speed capability above 240 km/h (149 mph), a "Z" may appear in the tire size designation. For tires having a maximum speed capability above 300 km/h (186 mph), a "Z" must appear in the size designation and the service description must include a "Y" in parenthesis. Consult the tire manufacturer for the tire's maximum speed capability when there is no service description.

<b>EXAMPLE:</b>	<b>Tire Designation</b>	Maximum Speed
	P275/40ZR17	Above 240 km/h (149 mph)
	P275/40R17 93Y	300 km/h (186 mph)
	P275/40ZR17 93Y	300 km/h (186 mph)
	P275/40R17 (93Y)	Above 300 km/h (186 mph)
		Consult the tire manufacturer



# **IMPORTANT PRODUCT NOTIFICATIONS**

Passenger sizes used in CUV/SUV/Light Truck applications have reduced load capacity. This will differ from the maximum load branded on the tire sidewall. Government UTQG Ratings do not apply to light truck sized tires or winter tires.

- 1. The sizes shown are average design values for tires measured on specified measuring rim widths. Some tires may vary from this value by +/-3% of the section height (affecting overall diameter), and +/-4% of the section width.
- 2. Section width varies approximately 0.2" (5 mm) for every 0.5" change in rim width.
- 3. Tread patterns are often tuned to accommodate different tire widths. Tires for a particular dimension of a given tire line may vary in appearance from the tire shown in the photograph.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires and they should never inflate beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

Q-Speed Rated Sizes: 100 Maximum Speed (mph)

Inflation Increase (psi)	0.0		
Load Capacity (% of max.)	100		
R-Speed Rated Sizes:			
Maximum Speed (mph)	100	106	
Inflation Increase (psi)	0.0	1.0	
Load Capacity (% of max.)	100	100	

S-Sneed Rated Sizes

Y-Speed Rated Sizes: Maximum Speed (mph)

Load Capacity (% of max.)

- 1

o opoda Hatoa oizoo.	0.0 1.0		
Maximum Speed (mph)	100	106	112
Inflation Increase (psi)	0.0	1.0	2.0
Load Capacity (% of max	.) 100	100	100
T Coood Dated Circo.			

1-opeeu naieu oizes.				
Maximum Speed (mph)	100	106	112	118
Inflation Increase (psi)	0.0	1.0	2.0	3.0
Load Capacity (% of max.)	100	100	100	100
U Coood Datad Cizon				

H-Speed Hated Sizes:					
Maximum Speed (mph)	100	106	112	118	124
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0
Load Capacity (% of max.)	100	100	100	100	100
V-Speed Rated Sizes:					
Maximum Speed (mph)	100	106	112	118	124

initation increase (psi)	0.0	1.0	2.0	3.0	4.0
Load Capacity (% of max.)	100	100	100	100	100
W-Speed Rated Sizes:					
Maximum Speed (mph)	118	124	130	136	143
Inflation Increase (psi)	0.0	1.5	3.0	4.5	6.0
Load Capacity (% of max.)	100	100	100	100	100

initation increase (psi)	0.0	0.0	0.0	0.0	1.5
Load Capacity (% of max.)	100	100	100	100	100
(Y)-Speed Rated Sizes:					
Maximum Speed (mph)	118	124	130	136	143
Inflation Increase (nsi)	0.0	0.0	0.0	0.0	1.5

100

124

130

100

136

100

143

100

For speeds above 186 mph (300 km/h), consult your vehicle manufacturer and tire dealer.

118

100

DANGER: Never mount a 16" diameter tire on a 16.5" rim. DANGER: Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer. use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over 100 mph (160 km/h), load and inflation must be adjusted according to the table below

OE Code [Original Equipment Key]: GM = General Motors

Government UTQG Ratings do not apply to Light Truck tires that are LT metric or flotation size.

For all P-metric sizes: Passenger sizes used in Light Truck/SUV applications have reduced load capacity. This will differ from the maximum load branded on the tire sidewall

XL=Extra Load

130						
5.0						
100						
130	136	143	149			
5.0	5.0	5.0	5.0			
100	97	94	91			
149	155	161	168			
7.5	7.5	7.5	7.5			
100	95	90	85			
149	155	161	168	174	180	186
3.0	4.5	6.0	7.5	7.5	7.5	7.5
100	100	100	100	95	90	85
149	155	161	168	174	180	186
3.0	4.5	6.0	7.5	7.5	7.5	7.5
100	100	100	100	95	90	85



#### **COMPARISON CHARTS**

#### PASSENGER TIRES COMPARISON CHART

UNIROYAL® TIGER PAW® GTZ All Season 2

UNIROYAL® TIGER PAW® Touring A/S

UNIROYAL® TIGER PAW® AWP II

UNIROYAL® TIGER PAW® Ice & Snow™ 3

#### WARRANTY COVERAGE

















#### LIGHT TRUCK/SUV/CROSSOVER & COMMERCIAL TIRES COMPARISON CHART

UNIROYAL® LAREDO® Cross Country Tour

UNIROYAL® LAREDO® Cross Country

UNIROYAL® LAREDO® HD/H™

#### WARRANTY COVERAGE

















1-877-458-5878 | UNIROYAL.COM