



NEXEN

NEXEN TIRE

**PRODUCT
SHOWCASE
2025**

NEXEN



"As a company that has the ability to impress customers with the best quality, we will become something that you can have utmost pride in. We will emerge as the NEXEN TIRE that makes you elated with new products and breakthroughs in technology development. We will move forward to becoming a global leader, looking ahead to the next century. And beyond history, and beyond passion, in the name of trust, we will stand by you as you advance into the future."

Travis Kang - CEO, Nexen Tire

SINCE 2000,
Nexen Tire has produced over

600,000,000

**(over 1/2 billion) tires with absolutely
ZERO recalls in the USA.**



STEADY DRIVING PERFORMANCE IN VARIOUS CONDITIONS

IMPROVED BRAKING ON ANY TYPE OF ROAD CONDITION

Optimized compound hardness and grip resin technology improves braking performance by increasing road contact area.



ENHANCED GRIP & SLIP-RESISTANT ON WET AND SNOWY ROADS

Angled wave shape and micro-thin kerfs deliver outstanding wet and snow performances.



REINFORCED SNOW TRACTION

Jagged patterns on both shoulder blocks effectively generate tractive force on snowy road conditions.



3PMSF CERTIFIED

3PMSF Certified is a severe winter certification to withstand heavy snow, ice, and tough terrain.

COVERAGE FOR PEACE OF MIND

The N'Blue 4 Season 2 is backed by one of the most comprehensive warranties in the industry, delivering extended value and peace of mind throughout the life of the tire.



70K MILE TREAD WARRANTY



ROAD HAZARD PROTECTION* FIRST 3/32" OR 2 YEARS



36 MONTHS ROADSIDE ASSISTANCE



FREE TRIAL 45 DAYS OR 500 MILES



reddot winner 2022



ALL WEATHER TOURING

N'BLUE 4Season2

EXCEPTIONAL ALL-WEATHER PERFORMANCE



HIGHWAY TERRAIN
**ROADIAN
HTX2**


**ALL PERFORMANCE
IN ALL WEATHER**

**LONG MILEAGE PERFORMANCE
DESIGNED INTO EVERY FEATURE.**



3PMSF Certified

3PMSF Certified is a severe winter certification to withstand heavy snow, ice, and tough terrain. (except OE tires)



HIGH-SPEED CONTROL

Cooling pins applied to shoulder of the tire to efficiently dissipate heat for increased durability under high speeds.



New Roadian HTX2



Conventional



REINFORCED SNOW TRACTION

Emerging 3D sipes improve traction in snowy conditions. Changing sipe technology as tire wears provides increased tread contact and overall handling characteristics.

INCREDIBLE DURABILITY

Nexen's proven bead design and construction consists of an optimized profile bead filler and stiffer rim flange for increased overall rigidity and tire durability.

THEY LOOK AS GOOD AS THEY PERFORM.

The Roadian HTX2 is available in two sidewall design options to complement your vehicle and white lettering in limited sizes.



ALL TERRAIN

ROADIAN ATX


PUSHING ALL-TERRAIN PERFORMANCE

TO A NEW LEVEL



3PMSF Certified

as a severe winter certification to withstand heavy snow, ice, and tough terrain.
(Except OE & flotation sizes)




REINFORCED 3-PLY CONSTRUCTION

Nexen's 3-ply sidewall produces an industry-best AT tire with longer life and increased durability that performs under heavier loads and higher pressures. The increased sidewall rigidity enhances stability while cornering under loads and heavy towing.

ENHANCED DURABILITY AND PERFORMANCE

The sidewall design increases puncture resistance both on road and off. Durability is also improved thanks to an aggressive angled pattern.



REINFORCED SNOW TRACTION

Emerging 3D sipes improve traction in snow, mud, and wet conditions. Nexen's changing sipe technology increases tread-to-road contact and overall handling characteristics as the tire wears.

PICK THE SIDEWALL THAT FITS YOU BEST.

The Roadian ATX is available in two dynamic sidewall design options to complement your vehicle and attitude. The dual-sidewall design is more aggressive than the AT Pro predecessor without sacrificing a quiet ride.



DEALER RESOURCES



NEXEN NEXT LEVEL DEALER PROGRAM

Easy to understand, Fast payouts, Dealer Dashboards, Distributor Dashboards, What if? Calculator, Annual True-up, Combine Locations, and much more!



NEXEN NETWORK

CUSTOMIZED IN-STORE TV ENTERTAINMENT

Showcase store promotions, Nexen products, and engaging viral content. Plus live TV and sports!

FINALLY A PROGRAM FOR SPECIALTY SHOPS AND DEALERS!

- Tire Payouts
- Premium Wearables
- And More!

OFF-ROAD GARAGE



NEXENACE

ACCELERATED CERTIFICATION & EDUCATION

ONLINE TIRE TRAINING AND EDUCATION

- Earn points
- Enter sweepstakes
- Order merchandise
- Request POP materials



NEXENACE.COM

NEXENTIREGARAGE.COM



- Next Level
- NexenACE
- Nexen Network
- Nexen App
- Dealer Portal
- Tire Finder
- Brand Resources

ULTRA HIGH PERFORMANCE



N'FERA Sport R
EXTREME ULTRA HIGH PERFORMANCE

The all new Nexen N'Fera Sport R has that same level of intensity designed deep into its DNA. Grip. Control. Cornering. Speed and feedback... Amazing.

SIZES AVAILABLE: 13
SIZE RANGE: 15" - 19"

MILEAGE WARRANTY: N/A
ROAD HAZARD: N/A
ROADSIDE ASSISTANCE: 36 months

UTQG: 200 A A
SPEED RATING: W



16

N'FERA SU1
ULTRA HIGH PERFORMANCE SUMMER

Perfect fit for sports car applications or for the driver who wants a little more performance out of their standard vehicle. Excels at braking and cornering performance.

SIZES AVAILABLE: 68
SIZE RANGE: 16" - 24"

MILEAGE WARRANTY: 25,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles

UTQG: 300 AA A
SPEED RATING: W & Y



17

N'FERA AU7 OE FITMENT
ULTRA HIGH PERFORMANCE ALL SEASON

Designed for the discretionary driver of sports cars, luxury coupes, and performance sedans looking for superior traction in dry and wet conditions.



SIZES AVAILABLE: 51
SIZE RANGE: 16" - 20"

MILEAGE WARRANTY: 50,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles

UTQG: 500 AA A / 500 A A / 560 A A
SPEED RATING: H, V, W, & Y



19

PASSENGER TOURING

N'PRIZ AH8 OE FITMENT
GRAND TOURING ALL SEASON

Designed for family sedans that depend on safety year-round. Ride confidently with excellent traction in dry, wet, and light snow conditions.



SIZES AVAILABLE: 58
SIZE RANGE: 14" - 19"

MILEAGE WARRANTY: 75,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles

UTQG: 440/500/560/600 A A
SPEED RATING: T, H, V, & W



28

N5000 Platinum Exclusive For
GRAND TOURING ALL SEASON

The upgraded Nexen N5000 Platinum combines the look of a performance tire with the comfortable, quiet ride of a passenger tire. Branded with the M+S symbol, this tire provides year-round traction, even in light snow.



SIZES AVAILABLE: 74
SIZE RANGE: 16" - 22"

MILEAGE WARRANTY: 70K(H, V)/55K(W) miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles

UTQG: 580 A A (W), 700 A A (H, V)
SPEED RATING: H, V, W, & Y



25

Aria AH7
PREMIUM STANDARD TOURING ALL SEASON

A long-lasting, premium all-season tire that offers one of the longest mileage warranties in its class.

SIZES AVAILABLE: 25
SIZE RANGE: 15" - 18"

MILEAGE WARRANTY: 80,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles

UTQG: 760 A A
SPEED RATING: T & H



23

N'PRIZ AH5
STANDARD TOURING ALL SEASON

The perfect tire for entry-level sedans, CUVs, and SUVs. This tire offers a great balance of performance, handling, comfort, and wear life at a value price.

SIZES AVAILABLE: 72
SIZE RANGE: 14" - 20"

MILEAGE WARRANTY: 60,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months

UTQG: 460/500 A A
SPEED RATING: S, T, H, & V



30

PASSENGER TOURING (CONT.)



N'BLUE 4Season2
ALL-WEATHER TOURING

The N'BLUE 4 Season 2 is Nexen Tire's most recent all-weather tire designed for various on-road conditions. It not only improves snow performance, but also adds stability to high-speed driving with an all-weather optimized pattern design. In addition, this tire claims to have a longer treadlife.

SIZES AVAILABLE: 60
SIZE RANGE: 15" - 21"

UTQG: 600 A A
SPEED RATING: H, V, W & Y

MILEAGE WARRANTY: 70,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles



21

CUV / SUV / LIGHT TRUCK

ROADIAN ATX OE FITMENT
ALL TERRAIN

Designed for durability and all-around grip performance at any road condition with heavy-duty construction and materials.



SIZES AVAILABLE: 88
SIZE RANGE: 15" - 22"

UTQG: 560/600 A B
SPEED RATING: Q, S, T, H, & V

MILEAGE WARRANTY (P): 70,000 miles
MILEAGE WARRANTY (LT): 60,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles




38

ROADIAN HTX2 OE FITMENT
HIGHWAY TERRAIN

Designed for the long-inspired journey to create a high-mileage SUV and Light Truck tire that also delivers outstanding all-weather driving performance.




SIZES AVAILABLE: 54
SIZE RANGE: 16" - 22"

UTQG: 700 A A/B (P) Metric
SPEED RATING: R, S, T, & H

MILEAGE WARRANTY (P): 70,000 miles
MILEAGE WARRANTY (LT): 50,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles



36

ROADIAN HP
STREET SPORT TRUCK ALL SEASON

A low-profile truck and SUV tire that delivers sporty performance on any road surface.

SIZES AVAILABLE: 22
SIZE RANGE: 17" - 24"

MILEAGE WARRANTY: 40,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months

UTQG: 460 A A
SPEED RATING: H & V



33

ROADIAN GTX OE FITMENT
CUV/SUV TOURING

Drivers can count on the versatility and dependability of the New Roadian GTX, from cross-country road trips to trips to the store.



SIZES AVAILABLE: 67
SIZE RANGE: 16" - 22"

MILEAGE WARRANTY: 70,000 miles
ROAD HAZARD: First 3/32" or 2 years
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles

UTQG: 540/600/680 A A
SPEED RATING: H, V, & W



34

ROADIAN MTX
MUD TERRAIN

The Roadian MTX features an aggressive design that is extremely versatile for on- and off-road driving. Each tire boasts a dual-sidewall design that allows you to customize the look of the tire on your vehicle.

SIZES AVAILABLE: 36
SIZE RANGE: 15" - 22"

MILEAGE WARRANTY: N/A
ROAD HAZARD: N/A
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles

SPEED RATING: Q



41

ROADIAN CT8 HL OE FITMENT
COMMERCIAL VAN/LT

A tire constructed to deliver heavy-duty performance for commercial vehicles.



SIZES AVAILABLE: 14
SIZE RANGE: 15" - 18"

MILEAGE WARRANTY: N/A
ROAD HAZARD: N/A
ROADSIDE ASSISTANCE: 36 months
FREE TRIAL: 45 days or 500 miles

SPEED RATING: R, S, & T



44



A TIRE FOR EVERY SEASON

TABLE OF CONTENTS

HIGH PERFORMANCE

N'FERA SPORT R	16
N'FERA SU1	17
N'FERA AU7	19

PASSENGER

N'BLUE 4 SEASON 2	21
ARIA AH7	23
N5000 PLATINUM	25
N'PRIZ AH8	28
N'PRIZ AH5	30
SB-802	32

CUV/SUV/LIGHT TRUCK

ROADIAN HP	33
ROADIAN GTX.....	34
ROADIAN HTX 2	36
ROADIAN ATX.....	38
ROADIAN MTX	41
ROADIAN MT	43
ROADIAN CT8 HL	44
ROADIAN CT8	45

WINTER

WINGUARD SPORT 2	46
WINGUARD WINSPIKE 3	49

OEM

ORIGINAL EQUIPMENT 2025	52
-------------------------------	----

WARRANTY

NEXEN TOTAL COVERAGE WARRANTY	56
-------------------------------------	----

MINIMUM ADVERTISED PRICING POLICY	60
---	----

N'FERA Sport R

EXTREME ULTRA HIGH PERFORMANCE

The Nexen N'Fera Sport R has that same level of intensity designed deep into its DNA. Grip. Control. Cornering. Speed and feedback... Amazing. The N'Fera Sport R lets you ring out every last cubic inch of your car's capability with the confidence to enter that corner just a little bit later... and exit a lot more happy.



**TOTAL
COVERAGE
WARRANTY**
NEXEN TIRE



TREAD WEAR
WARRANTY
N/A



ROAD HAZARD
WARRANTY
N/A



ROADSIDE
ASSISTANCE
36 MONTHS

Product	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
10224NXX		205/50R15	XL	89	W	4	50	1,279	-	6.5	5.5-7.5	8.2	23.1	7.5	200	A	A	Black
10251NXX		225/45R15		87	W	4	51	1,201	-	7.5	7.0-8.5	8.9	23.0	7.5	200	A	A	Black
10223NXX		245/40R15		88	W	4	51	1,235	-	8.5	8.0-9.5	9.8	22.7	7.5	200	A	A	Black
10211NXX		225/45R17	XL	94	W	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	7.5	200	A	A	Black
10227NXX		245/40R17	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.8	24.7	7.5	200	A	A	Black
10210NXX		255/40R17	XL	98	W	4	50	1,653	-	9.0	8.5-10.0	10.2	25.0	7.5	200	A	A	Black
18120NXX		245/40R18		93	W	4	51	1,433	-	8.5	8.0-9.5	9.8	25.7	7.5	200	A	A	Black
10244NXX		255/35R18	XL	94	W	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	7.5	200	A	A	Black
10213NXX		265/35R18	XL	97	W	4	50	1,609	-	9.5	9.0-10.5	10.7	25.3	7.5	200	A	A	Black
10203NXX		275/35R18		95	W	4	51	1,521	-	9.5	9.0-11.0	10.9	25.6	7.5	200	A	A	Black
10212NXX		295/40R18		103	W	4	51	1,929	-	10.5	10.0-11.5	11.9	27.3	7.5	200	A	A	Black
10199NXX		315/30R18		98	W	4	51	1,653	-	11.0	10.5-11.5	12.6	25.5	7.5	200	A	A	Black
10225NXX		305/30R19	XL	102	W	4	50	1,874	-	11.0	10.5-11.5	12.3	26.3	7.5	200	A	A	Black

Technical data can be changed without further notice.

OFFICIAL SPONSOR SINCE 2016



PERFORMANCE RATINGS



BRAKING
10



COMFORT
5



FUEL EFFICIENCY
5



HANDLING
10



WEAR LIFE
4

N'FERA SU1

ULTRA HIGH PERFORMANCE

The N'Fera SU1 has three main grooves and a semi-groove to maximize wet driving performance and enhance handling. The dry grip technology boosts handling and braking performance, while an optimum surface siping design improves wet/dry traction performance. An equally balanced design and enhanced block rigidity disperse stress evenly during high-speed cornering, boosting cornering and steering stability.



**TOTAL
COVERAGE
WARRANTY**
NEXEN TIRE



TREAD WEAR
WARRANTY
25,000 MILES



ROAD HAZARD
WARRANTY
FIRST 3/32"
OR 2 YEARS



ROADSIDE
ASSISTANCE
36 MONTHS



FREE TRIAL
45 DAYS OR
500 MILES

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
13416NXX		195/45R16	XL	84	W	4	50	1,102	-	6.5	6.0-7.5	7.7	22.9	9.5	300	AA	A	Black
12729NXX		205/40R16		79	W	4	51	963	-	7.5	7.0-8.0	8.3	22.5	9.5	300	AA	A	Black
* 12358NXX		215/55R16	XL	97	W	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	9.5	300	AA	A	Black
12346NXX		205/40R17	XL	84	W	4	50	1,102	-	7.5	7.0-8.0	8.3	23.5	9.5	300	AA	A	Black
12725NXX		205/45R17	XL	88	W	4	50	1,235	-	7.0	6.5-7.5	8.1	24.3	9.5	300	AA	A	Black
* 13053NXX		205/50R17	XL	93	W	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	9.5	300	AA	A	Black
12349NXX		215/40R17	XL	87	W	4	50	1,201	-	7.5	7.0-8.5	8.6	23.8	9.5	300	AA	A	Black
12351NXX		215/45R17	XL	91	W	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	9.5	300	AA	A	Black
12300NXX		225/45R17	XL	94	Y	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	9.5	300	AA	A	Black
12311NXX		235/45R17	XL	97	W	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	9.5	300	AA	A	Black
12722NXX		245/40R17	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.8	24.7	9.5	300	AA	A	Black
13418NXX		245/45R17	XL	99	Y	4	50	1,709	-	8.0	7.5-9.0	9.6	25.7	9.5	300	AA	A	Black
12731NXX		255/40R17		94	W	4	51	1,477	-	9.0	8.5-10.0	10.2	25.0	9.5	300	AA	A	Black
14112NXX		275/40R17		98	W	4	51	1,653	-	9.5	9.0-11.0	10.9	25.7	9.5	300	AA	A	Black
12348NXX		215/35R18	XL	84	Y	4	50	1,102	-	7.5	7.0-8.5	8.6	23.9	9.5	300	AA	A	Black
12350NXX		215/40R18	XL	89	Y	4	50	1,279	-	7.5	7.0-8.5	8.6	24.8	9.5	300	AA	A	Black
14096NXX		215/45R18	XL	93	W	4	50	1,433	-	7.0	7.0-8.0	8.4	25.6	9.5	300	AA	A	Black
11782NXX		225/40R18	XL	92	Y	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	9.5	300	AA	A	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
10



COMFORT
9



FUEL EFFICIENCY
7



HANDLING
10



WEAR LIFE
7



CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
12332NXX		225/45R18	XL	95	Y	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	9.5	300	AA	A	Black
12302NXX		235/40R18	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	9.5	300	AA	A	Black
14013NXX		235/45R18	XL	98	Y	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	9.5	300	AA	A	Black
12345NXX		245/35R18	XL	92	Y	4	50	1,389	-	8.5	8.0-9.5	9.8	24.8	9.5	300	AA	A	Black
12312NXX		245/40R18	XL	97	Y	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	9.5	300	AA	A	Black
12726NXX		245/45R18	XL	100	Y	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	9.5	300	AA	A	Black
12347NXX		255/35R18	XL	94	Y	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	9.5	300	AA	A	Black
12592NXX		255/40R18	XL	99	Y	4	50	1,709	-	9.0	8.5-10.0	10.2	26.0	9.5	300	AA	A	Black
12734NXX		255/45R18	XL	103	Y	4	50	1,929	-	8.5	8.0-9.5	10.0	27.0	9.5	300	AA	A	Black
13516NXX		265/35R18	XL	97	Y	4	50	1,609	-	9.5	9.0-10.5	10.7	25.3	9.5	300	AA	A	Black
14111NXX		265/40R18	XL	101	Y	4	50	1,819	-	9.5	9.0-10.5	10.4	26.3	9.5	300	AA	A	Black
13517NXX		275/35R18	XL	99	W	4	50	1,709	-	9.5	9.0-11.0	10.9	25.6	9.5	300	AA	A	Black
16405NXX		275/40R18	XL	103	Y	4	50	1,929	-	9.5	9.0-11.0	10.9	26.7	9.5	300	AA	A	Black
16402NXX		285/35R18	XL	101	Y	4	50	1,819	-	10.0	9.5-11.0	11.2	25.9	9.5	300	AA	A	Black
12331NXX		225/35R19	XL	88	Y	4	50	1,235	-	8.0	7.5-9.0	9.1	25.2	9.5	300	AA	A	Black
14121NXX		225/40R19	XL	93	Y	4	50	1,433	-	8.0	7.5-9.0	9.1	26.1	9.5	300	AA	A	Black
14099NXX		225/45R19	XL	96	W	4	50	1,565	-	7.5	7.0-8.5	8.9	27.0	9.5	300	AA	A	Black
12315NXX		235/35R19	XL	91	Y	4	50	1,356	-	8.5	8.0-9.5	9.5	25.5	9.5	300	AA	A	Black
15089NXX		235/40R19	XL	96	Y	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	9.5	300	AA	A	Black
13514NXX		245/35R19	XL	93	Y	4	50	1,433	-	8.5	8.0-9.5	9.8	25.8	9.5	300	AA	A	Black
12723NXX		245/40R19	XL	98	Y	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	9.5	300	AA	A	Black
14019NXX		245/45R19	XL	102	Y	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	9.5	300	AA	A	Black
14108NXX		255/30R19	XL	91	Y	4	50	1,356	-	9.0	8.5-9.5	10.2	25.1	9.5	300	AA	A	Black
12338NXX		255/35R19	XL	96	W	4	50	1,565	-	9.0	8.5-10.0	10.2	26.0	9.5	300	AA	A	Black
13519NXX		255/40R19	XL	100	Y	4	50	1,764	-	9.0	8.5-10.0	10.2	27.0	9.5	300	AA	A	Black
13524NXX		255/45R19	XL	104	Y	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	9.5	300	AA	A	Black
13512NXX		265/30R19	XL	93	Y	4	50	1,433	-	9.5	9.0-10.0	10.7	25.3	9.5	300	AA	A	Black
12717NXX		275/30R19	XL	96	Y	4	50	1,565	-	9.5	9.0-10.0	10.9	25.6	9.5	300	AA	A	Black
14026NXX		275/35R19	XL	100	Y	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	9.5	300	AA	A	Black
13518NXX		275/35R19	XL	100	Y	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	9.5	300	AA	A	Black
13520NXX		275/40R19	XL	105	Y	4	50	2,039	-	9.5	9.0-11.0	10.9	27.7	9.5	300	AA	A	Black
14639NXX		225/30R20	XL	85	Y	4	50	1,135	-	8.0	8.0	9.1	25.4	9.0	300	AA	A	Black
14101NXX		225/35R20	XL	90	Y	4	50	1,323	-	8.0	7.5-9.0	9.1	26.2	9.5	300	AA	A	Black
14758NXX		235/30R20	XL	88	Y	4	50	1,235	-	8.5	8.5	9.5	25.6	10.0	300	AA	A	Black
13511NXX		245/30R20	XL	90	Y	4	50	1,323	-	8.5	8.0-8.5	9.8	25.8	9.5	300	AA	A	Black
13515NXX		245/35R20	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.8	26.8	9.5	300	AA	A	Black
14031NXX		245/40R20	XL	99	Y	4	50	1,709	-	8.5	8.0-9.5	9.8	27.7	9.5	300	AA	A	Black
15090NXX		245/45R20	XL	103	Y	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	9.0	300	AA	A	Black
14110NXX		255/35R20	XL	97	Y	4	50	1,609	-	9.0	8.5-10.0	10.2	27.0	9.5	300	AA	A	Black
12716NXX		275/30R20	XL	97	Y	4	50	1,609	-	9.5	9.0-10.0	10.9	26.5	9.5	300	AA	A	Black
14113NXX		275/35R20	XL	102	Y	4	50	1,874	-	9.5	9.0-11.0	10.9	27.6	9.5	300	AA	A	Black
14114NXX		275/40R20	XL	106	Y	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	9.5	300	AA	A	Black
13513NXX		285/30R20	XL	99	Y	4	50	1,709	-	10.0	9.5-10.5	11.4	26.8	9.5	300	AA	A	Black
14757NXX		235/30R22	XL	90	Y	4	50	1,323	-	8.5	8.5	9.5	27.6	10.0	300	AA	A	Black
14647NXX		245/30R22	XL	92	Y	4	50	1,389	-	8.5	8.0-8.5	9.8	27.8	9.0	300	AA	A	Black
14648NXX		265/30R22	XL	97	Y	4	50	1,609	-	9.5	9.0-10.0	10.7	28.3	9.0	300	AA	A	Black
14646NXX		295/25R22	XL	97	Y	4	50	1,609	-	10.5	10.0-11.0	11.9	27.8	9.0	300	AA	A	Black
14756NXX		255/30R24	XL	97	Y	4	50	1,609	-	9.0	8.5-9.5	10.2	30.1	10.0	300	AA	A	Black
14754NXX		275/25R24	XL	96	Y	4	50	1,565	-	10.0	10.0-10.5	11.1	29.4	10.0	300	AA	A	Black
14755NXX		275/30R24	XL	101	Y	4	50	1,819	-	9.5	9.0-10.0	10.9	30.6	10.0	300	AA	A	Black

Technical data can be changed without further notice
* While supplies last.




ULTRA HIGH PERFORMANCE ALL SEASON

The N'Fera AU7 is designed for the discretionary driver of sports cars, luxury coupes, and performance sedans looking for superior traction in dry and wet conditions.

The N'Fera AU7 stands out against the competition, especially in wet conditions.



OE FITMENT ON



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
14208NXX		205/55R16		91	W	4	51	1,356	-	6.5	5.5-7.5	8.4	24.9	9.0	500	AA	A	Black	
16643NXX		205/60R16		92	H	4	51	1,389	-	6.0	5.5-7.5	8.2	25.7	9.0	500	A	A	Black	VW
15625NXX		205/45R17	XL	88	W	4	50	1,235	-	7.0	6.5-7.5	8.1	24.3	9.0	500	AA	A	Black	
14404NXX		205/50R17	XL	93	W	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	9.0	500	AA	A	Black	
16694NXX		205/55R17		91	H	4	51	1,356	-	6.5	5.5-7.5	8.7	25.9	9.0	500	A	A	Black	VW
14403NXX		215/45R17	XL	91	W	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	9.0	500	AA	A	Black	
15227NXX		215/50R17	XL	95	W	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	9.0	500	AA	A	Black	
14401NXX		215/55R17		94	W	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	500	AA	A	Black	
16313NXX		215/55R17		94	H	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	560	A	A	Black	VW
15113NXX		225/45R17	XL	94	W	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	9.0	500	AA	A	Black	
17577NXX		225/45R17		91	H	4	51	1,356	-	7.5	7.0-8.5	8.9	25.0	9.5	500	A	A	Black	Audi
14400NXX		225/50R17	XL	98	W	4	50	1,653	-	7.0	6.0-8.0	9.2	25.9	9.0	500	AA	A	Black	
14402NXX		225/55R17		97	W	4	51	1,609	-	7.0	6.0-8.0	9.2	26.8	9.0	500	AA	A	Black	
15228NXX		235/45R17	XL	97	W	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	9.0	500	AA	A	Black	
15626NXX		235/55R17		99	W	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	9.0	500	AA	A	Black	
14419NXX		245/40R17		91	W	4	51	1,356	-	8.5	8.0-9.5	9.8	24.7	9.0	500	AA	A	Black	
15229NXX		245/45R17	XL	99	W	4	50	1,709	-	8.0	7.5-9.0	9.6	25.7	9.0	500	AA	A	Black	

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING 10



COMFORT 9



FUEL EFFICIENCY 8



HANDLING 9



WEAR LIFE 8



CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
15627NXX		215/40R18		85	W	4	51	1,135	-	7.5	7.0-8.5	8.6	24.8	9.0	500	AA	A	Black	
14416NXX		215/45R18		89	W	4	51	1,279	-	7.0	7.0-8.0	8.4	25.6	9.0	500	AA	A	Black	
14422NXX		225/40R18	XL	92	W	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	9.0	500	AA	A	Black	
14412NXX		225/45R18	XL	95	Y	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	9.0	500	AA	A	Black	
14406NXX		225/50R18	XL	99	W	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	9.0	500	AA	A	Black	
15231NXX		235/40R18	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	9.0	500	AA	A	Black	
15230NXX		235/45R18	XL	98	W	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	9.0	500	AA	A	Black	
15114NXX		235/50R18		97	W	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.0	500	AA	A	Black	
14411NXX		245/40R18	XL	97	W	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	9.0	500	AA	A	Black	
14410NXX		245/45R18	XL	100	W	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	9.0	500	AA	A	Black	
15628NXX		245/50R18		100	W	4	51	1,764	-	7.5	7.0-8.5	10.0	27.7	9.0	500	AA	A	Black	
NEW 17589NXX		245/55R18		103	Y	4	51	1,929	-	7.5	7.0-8.5	10.0	28.6	11.0	500	AA	A	Black	Dodge
15232NXX		255/35R18	XL	94	W	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	9.0	500	AA	A	Black	
14421NXX		255/40R18		95	Y	4	51	1,521	-	9.0	8.5-10.0	10.2	26.0	9.0	500	AA	A	Black	
14414NXX		255/45R18		99	W	4	51	1,709	-	8.5	8.0-9.5	10.0	27.0	9.0	500	AA	A	Black	
15636NXX		275/35R18		95	Y	4	51	1,521	-	9.5	9.0-11.0	10.9	25.6	9.0	500	AA	A	Black	
17464NXX		225/40R19	XL	93	Y	4	50	1,433	-	8.0	7.5-9.0	9.1	26.1	9.0	500	AA	A	Black	
14418NXX		225/45R19	XL	96	W	4	50	1,565	-	7.5	7.0-8.5	8.9	27.0	9.0	500	AA	A	Black	
15234NXX		235/40R19	XL	96	W	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	9.0	500	AA	A	Black	
15629NXX		235/45R19		95	W	4	51	1,521	-	8.0	7.5-9.0	9.3	27.4	9.0	500	AA	A	Black	
14420NXX		245/40R19	XL	98	Y	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	9.0	500	AA	A	Black	
14415NXX		245/45R19	XL	102	W	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	9.0	500	AA	A	Black	
15630NXX		255/35R19	XL	96	Y	4	50	1,565	-	9.0	8.5-10.0	10.2	26.0	9.0	500	AA	A	Black	
14423NXX		255/40R19	XL	100	Y	4	50	1,764	-	9.0	8.5-10.0	10.2	27.0	9.0	500	AA	A	Black	
15233NXX		255/45R19		100	W	4	51	1,764	-	8.5	8.0-9.5	10.0	28.1	9.0	500	AA	A	Black	
15631NXX		275/35R19		96	Y	4	51	1,565	-	9.5	9.0-11.0	10.9	26.6	9.0	500	AA	A	Black	
15633NXX		275/40R19		101	Y	4	51	1,819	-	9.5	9.0-11.0	10.9	27.7	9.0	500	AA	A	Black	
15637NXX		225/35R20	XL	90	W	4	50	1,323	-	8.0	7.5-9.0	9.1	26.2	9.0	500	AA	A	Black	
15638NXX		245/35R20	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.8	26.8	9.0	500	AA	A	Black	
15624NXX		245/40R20	XL	99	Y	4	50	1,709	-	8.5	8.0-9.5	9.8	27.7	9.0	500	AA	A	Black	
14413NXX		245/45R20	XL	103	W	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	9.0	500	AA	A	Black	
15634NXX		255/35R20	XL	97	Y	4	50	1,609	-	9.0	8.5-10.0	10.2	27.0	9.0	500	AA	A	Black	
NEW 17590NXX		255/45R20	XL	105	V	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	9.0	500	A	A	Black	Dodge
15635NXX		275/35R20	XL	102	Y	4	50	1,874	-	9.5	9.0-11.0	10.9	27.6	9.0	500	AA	A	Black	

Technical data can be changed without further notice. For more detailed OE application information, please refer to "Original Equipment 2025" page.



ALL-WEATHER TOURING

The N'BLUE 4 Season 2 is Nexen Tire's most recent all-weather tire designed for various on-road conditions. It not only improves snow performance, but also adds stability to high-speed driving with an all-weather optimized pattern design. In addition, this tire claims to have a longer treadlife.



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
16096NXX		195/65R15	XL	95	V	4	50	1,521	-	6.0	5.5-7.0	7.9	25.0	10.0	600	A	A	Black
16099NXX		205/55R16	XL	94	V	4	50	1,356	-	6.5	5.5-7.5	8.4	24.9	10.0	600	A	A	Black
16090NXX		205/60R16	XL	96	V	4	50	1,389	-	6.0	5.5-7.5	8.2	25.7	10.0	600	A	A	Black
19174NXX		205/65R16		95	H	4	51	1,521	-	6.0	5.5-7.5	8.2	26.5	10.0	600	A	A	Black
19175NXX		215/55R16	XL	97	V	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	10.0	600	A	A	Black
19162NXX		215/60R16		95	V	4	51	1,521	-	6.5	6.0-7.5	8.7	26.1	10.0	600	A	A	Black
19179NXX		215/65R16	XL	102	V	4	50	1,874	-	6.5	6.0-7.5	8.7	27.0	10.0	600	A	A	Black
** 1A003NXX		215/70R16		100	H	4	51	1,764	-	6.5	5.5-7.0	8.7	27.9	10.0	600	A	A	Black
** 1A010NXX		225/60R16		98	V	4	51	1,653	-	6.5	6.0-8.0	9.0	26.6	10.0	600	A	A	Black
** 1A043NXX		195/60R17		90	V	4	51	1,323	-	6.0	5.5-7.0	7.9	26.2	10.0	600	A	A	Black
19160NXX		205/50R17	XL	93	V	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	10.0	600	A	A	Black
** 1A008NXX		205/55R17	XL	95	V	4	50	1,521	-	6.5	5.5-7.5	8.4	25.9	10.0	600	A	A	Black
16095NXX		215/45R17	XL	91	W	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	10.0	600	A	A	Black
19165NXX		215/50R17	XL	95	W	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	10.0	600	A	A	Black
16191NXX		215/55R17	XL	98	W	4	50	1,477	-	7.0	6.0-7.5	8.9	26.3	10.0	600	A	A	Black
19184NXX		215/60R17	XL	100	V	4	50	1,764	-	6.5	6.0-7.5	8.7	27.2	10.0	600	A	A	Black
19185NXX		215/65R17		99	H	4	51	1,709	-	6.5	6.0-7.5	8.7	28.0	10.0	600	A	A	Black
16105NXX		225/45R17	XL	94	W	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	10.0	600	A	A	Black
19166NXX		225/50R17	XL	98	W	4	50	1,653	-	7.0	6.0-8.0	9.2	25.9	10.0	600	A	A	Black
19181NXX		225/55R17	XL	101	W	4	50	1,819	-	7.0	6.0-8.0	9.2	26.8	10.0	600	A	A	Black
16100NXX		225/60R17	XL	103	V	4	50	1,709	-	6.5	6.0-8.0	9.0	27.6	10.0	600	A	A	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING 9



COMFORT 8



FUEL EFFICIENCY 8



HANDLING 9



WEAR LIFE 9



3 Peak Mountain Snowflake Certified



CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
16093NXX		225/65R17	XL	106	V	4	50	1,874	-	6.5	6.0-8.0	9.0	28.5	10.0	600	A	A	Black
19177NXX		235/55R17		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	10.0	600	A	A	Black
19169NXX		235/60R17		102	H	4	51	1,874	-	7.0	6.5-8.5	9.4	28.1	10.0	600	A	A	Black
16197NXX		235/65R17	XL	108	W	4	50	1,984	-	7.0	6.5-8.5	9.4	29.1	10.0	600	A	A	Black
19167NXX		215/55R18	XL	99	V	4	50	1,709	-	7.0	6.0-7.5	8.9	27.3	10.0	600	A	A	Black
16092NXX		225/40R18	XL	92	Y	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	10.0	600	A	A	Black
16189NXX		225/45R18	XL	95	Y	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	10.0	600	A	A	Black
19170NXX		225/50R18	XL	99	W	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	10.0	600	A	A	Black
19171NXX		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	10.0	600	A	A	Black
19182NXX		225/60R18	XL	104	V	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	10.0	600	A	A	Black
16192NXX		235/40R18	XL	95	Y	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	10.0	600	A	A	Black
16193NXX		235/45R18	XL	98	Y	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	10.0	600	A	A	Black
19158NXX		235/50R18		97	W	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	10.0	600	A	A	Black
19172NXX		235/55R18		100	V	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	10.0	600	A	A	Black
16188NXX		235/60R18	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	10.0	600	A	A	Black
19178NXX		235/65R18		106	V	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	10.0	600	A	A	Black
19161NXX		245/40R18	XL	97	W	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	10.0	600	A	A	Black
19176NXX		245/45R18	XL	100	W	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	10.0	600	A	A	Black
16107NXX		245/60R18		105	V	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	10.0	600	A	A	Black
** 1A019NXX		255/60R18	XL	112	V	4	50	2,469	-	7.5	7.0-9.0	10.2	30.0	10.0	600	A	A	Black
19159NXX		225/55R19	XL	103	V	4	50	1,929	-	7.0	6.0-8.0	9.2	28.8	10.0	600	A	A	Black
19164NXX		235/40R19	XL	96	W	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	10.0	600	A	A	Black
16104NXX		235/45R19	XL	99	W	4	50	1,709	-	8.0	7.5-9.0	9.3	27.4	10.0	600	A	A	Black
19183NXX		235/50R19	XL	103	V	4	50	1,929	-	7.5	6.5-8.5	9.6	28.3	10.0	600	A	A	Black
16089NXX		235/55R19	XL	105	W	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	10.0	600	A	A	Black
16106NXX		245/40R19	XL	98	Y	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	10.0	600	A	A	Black
19168NXX		245/45R19	XL	102	W	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	10.0	600	A	A	Black
19180NXX		245/55R19		103	V	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	10.0	600	A	A	Black
** 1A013NXX		255/45R19	XL	104	W	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	10.0	600	A	A	Black
** 1A012NXX		235/50R20	XL	104	W	4	50	1,984	-	7.5	6.5-8.5	9.6	29.3	10.0	600	A	A	Black
19173NXX		235/55R20		102	V	4	51	1,874	-	7.5	6.5-8.5	9.6	30.2	10.0	600	A	A	Black
** 1A021NXX		245/45R20	XL	103	W	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	10.0	600	A	A	Black
16108NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	10.0	600	A	A	Black
** 1A005NXX		255/45R20	XL	105	W	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	10.0	600	A	A	Black
16190NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	10.0	600	A	A	Black
19163NXX		255/55R20	XL	110	V	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	10.0	600	A	A	Black
** 1A017NXX		265/45R20	XL	108	W	4	50	2,205	-	9.0	8.5-10.0	10.5	29.4	10.0	600	A	A	Black
** 1A006NXX		265/45R21	XL	108	W	4	50	2,205	-	9.0	8.5-10.0	10.5	30.4	10.0	600	A	A	Black
** 1A011NXX		275/45R21	XL	110	W	4	50	2,337	-	9.0	8.5-10.5	10.7	30.7	10.0	600	A	A	Black

Technical data can be changed without further notice.
** 2025.2Q

Aria AH7

PREMIUM STANDARD TOURING ALL SEASON

The Aria AH7 includes a four-groove design, which leverages optimal driving performance on wet roads in all four seasons. This tire has a uniformly designed center, which evenly distributes external pressure when contacting the road surface and prevents one-sided wear. The five random pitch variation design reduces pattern noise, and the increased block stiffness and uniform block distribution deliver maximum grip during high-speed cornering.



TOTAL COVERAGE WARRANTY
NEXEN TIRE



TREAD WEAR WARRANTY
80,000 MILES



ROAD HAZARD WARRANTY
FIRST 3/32" OR 2 YEARS



ROADSIDE ASSISTANCE
36 MONTHS



FREE TRIAL
45 DAYS OR 500 MILES

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
15190NXX		195/65R15		91	H	4	44	1,356	-	6.0	5.5-7.0	7.9	25.0	10.5	760	A	A	Black
15194NXX		205/55R16		91	H	4	51	1,356	-	6.5	5.5-7.5	8.4	24.9	10.5	760	A	A	Black
15193NXX		205/60R16		92	H	4	44	1,389	-	6.0	5.5-7.5	8.2	25.7	10.5	760	A	A	Black
15191NXX		205/65R16		95	H	4	44	1,521	-	6.0	5.5-7.5	8.2	26.5	10.5	760	A	A	Black
14501NXX		215/60R16		95	T	4	44	1,521	-	6.5	6.0-7.5	8.7	26.1	10.5	760	A	A	Black
15192NXX		215/65R16		98	T	4	44	1,653	-	6.5	6.0-7.5	8.7	27.0	10.5	760	A	A	Black
15693NXX		215/70R16		100	H	4	44	1,764	-	6.5	5.5-7.0	8.7	27.9	10.5	760	A	A	Black
14311NXX		225/60R16		98	H	4	44	1,653	-	6.5	6.0-8.0	9.0	26.6	10.5	760	A	A	Black
13044NXX		225/65R16		100	T	4	44	1,764	-	6.5	6.0-8.0	9.0	27.5	10.5	760	A	A	Black
* 13046NXX		235/65R16		103	T	4	44	1,929	-	7.0	6.5-8.5	9.4	28.0	10.5	760	A	A	Black
15195NXX		215/55R17		94	H	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	10.5	760	A	A	Black
15155NXX		215/60R17		96	H	4	44	1,565	-	6.5	6.0-7.5	8.7	27.2	10.5	760	A	A	Black
13043NXX		215/65R17		99	T	4	44	1,709	-	6.5	6.0-7.5	8.7	28.0	10.5	760	A	A	Black
15198NXX		225/50R17		94	H	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	10.5	760	A	A	Black
13049NXX		225/55R17		97	H	4	51	1,609	-	7.0	6.0-8.0	9.2	26.8	10.5	760	A	A	Black
13041NXX		225/60R17		99	T	4	44	1,709	-	6.5	6.0-8.0	9.0	27.6	10.5	760	A	A	Black
15157NXX		225/65R17		102	H	4	44	1,874	-	6.5	6.0-8.0	9.0	28.5	10.5	760	A	A	Black
13042NXX		235/60R17		102	H	4	44	1,874	-	7.0	6.5-8.5	9.4	28.1	10.5	760	A	A	Black
13047NXX		235/65R17		104	T	4	44	1,984	-	7.0	6.5-8.5	9.4	29.1	10.5	760	A	A	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
7



COMFORT
8



FUEL EFFICIENCY
8



HANDLING
8



WEAR LIFE
10

Aria AH7

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
15196NXX		215/55R18		95	T	4	51	1,521	-	7.0	6.0-7.5	8.9	27.3	10.5	760	A	A	Black
15199NXX		225/50R18		95	T	4	51	1,521	-	7.0	6.0-8.0	9.2	26.9	10.5	760	A	A	Black
15197NXX		225/55R18		98	T	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	10.5	760	A	A	Black
13312NXX		235/55R18		100	H	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	10.5	760	A	A	Black
13313NXX		235/60R18		103	H	4	44	1,929	-	7.0	6.5-8.5	9.4	29.1	10.5	760	A	A	Black
13048NXX		235/65R18		106	H	4	44	2,094	-	7.0	6.5-8.5	9.4	30.0	10.5	760	A	A	Black

Technical data can be changed without further notice.
* While supplies last.

N5000 Platinum

GRAND TOURING ALL SEASON

Enjoy a smooth ride, all year long. The upgraded Nexen N5000 Platinum combines the look of a performance tire with the comfortable, quiet ride of a passenger tire. Branded with the M+S symbol, this tire provides year-round traction, even in light snow. And with its long tread life, the Nexen N5000 Platinum can handle some serious mileage. Try the tire that looks great and performs even better.



TOTAL COVERAGE WARRANTY



TREAD WEAR WARRANTY
70K MILES (H,V Rated)
55K MILES (W Rated)



ROAD HAZARD WARRANTY
FIRST 3/32" OR 2 YEARS



ROADSIDE ASSISTANCE
36 MONTHS



FREE TRIAL
45 DAYS OR 500 MILES

* Only available to American Tire Distributors





NEXEN TIRE

OFFICIAL PARTNER OF
MANCHESTER CITY FOOTBALL CLUB



**OFFICIAL SPONSOR
SINCE 2017**

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
18212NXX		195/50R16		84	V	4	51	1,102	-	6.0	5.5-7.0	7.9	23.7	9.5	700	A	A	Black
18175NXX		205/55R16		91	V	4	51	1,356	-	6.5	5.5-7.5	8.4	24.9	9.5	700	A	A	Black
18164NXX		215/55R16	XL	97	H	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	9.5	700	A	A	Black
18213NXX		205/50R17	XL	93	V	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	9.5	700	A	A	Black
18162NXX		215/45R17		87	W	4	51	1,201	-	7.0	7.0-8.0	8.4	24.6	9.5	580	A	A	Black
18160NXX		215/50R17	XL	95	W	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	9.5	580	A	A	Black
17422NXX		215/55R17		94	V	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	10.0	700	A	A	Black
18151NXX		215/60R17		96	H	4	51	1,565	-	6.5	6.0-7.5	8.7	27.2	10.0	700	A	A	Black
18177NXX		215/65R17		99	H	4	51	1,709	-	6.5	6.0-7.5	8.7	28.0	10.0	700	A	A	Black
18173NXX		225/45R17		91	W	4	51	1,356	-	7.5	7.0-8.5	8.9	25.0	9.5	580	A	A	Black
18166NXX		225/50R17		94	W	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	9.5	580	A	A	Black
18182NXX		225/55R17		97	W	4	51	1,609	-	7.0	6.0-8.0	9.2	26.8	9.5	580	A	A	Black
18167NXX		225/60R17		99	H	4	51	1,709	-	6.5	6.0-8.0	9.0	27.6	10.0	700	A	A	Black
18196NXX		225/65R17		102	H	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	10.0	700	A	A	Black
18191NXX		235/45R17	XL	97	W	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	9.5	580	A	A	Black
18155NXX		235/50R17		96	V	4	51	1,565	-	7.5	6.5-8.5	9.6	26.3	9.5	700	A	A	Black
18158NXX		235/55R17		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	10.0	700	A	A	Black
18180NXX		235/60R17		102	H	4	51	1,874	-	7.0	6.5-8.5	9.4	28.1	10.0	700	A	A	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
8



COMFORT
10



FUEL EFFICIENCY
8



HANDLING
8



WEAR LIFE
10

N5000 Platinum

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
								18194NXX		235/65R17					104	H	4	
18179NXX		245/40R17		91	W	4	51	1,356	-	8.5	8.0-9.5	9.8	24.7	9.5	580	A	A	Black
18183NXX		245/65R17		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	10.0	700	A	A	Black
18185NXX		245/70R17		110	H	4	51	2,337	-	7.0	6.5-8.0	9.8	30.6	10.0	700	A	A	Black
18170NXX		265/65R17		112	H	4	51	2,469	-	8.0	7.5-9.5	10.7	30.6	10.0	700	A	A	Black
18176NXX		215/45R18	XL	93	W	4	50	1,433	-	7.0	7.0-8.0	8.4	25.6	9.5	580	A	A	Black
18150NXX		215/55R18		95	H	4	51	1,521	-	7.0	6.0-7.5	8.9	27.3	9.5	700	A	A	Black
17272NXX		225/40R18	XL	92	W	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	10.0	580	A	A	Black
18156NXX		225/45R18	XL	95	W	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	9.5	580	A	A	Black
18205NXX		225/50R18	XL	99	W	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	9.5	580	A	A	Black
18216NXX		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	10.0	700	A	A	Black
18149NXX		225/60R18	XL	104	H	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	10.0	700	A	A	Black
18209NXX		235/40R18	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	9.5	580	A	A	Black
18210NXX		235/45R18	XL	98	W	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	9.5	580	A	A	Black
18187NXX		235/50R18		97	W	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.5	580	A	A	Black
18181NXX		235/55R18		100	V	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	10.0	700	A	A	Black
18204NXX		235/60R18	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	10.0	700	A	A	Black
18152NXX		235/65R18		106	V	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	10.0	700	A	A	Black
18192NXX		245/40R18	XL	97	W	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	9.5	580	A	A	Black
18184NXX		245/45R18	XL	100	W	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	9.5	580	A	A	Black
18174NXX		245/50R18		100	W	4	51	1,764	-	7.5	7.0-8.5	10.0	27.7	9.5	580	A	A	Black
18190NXX		245/60R18		105	V	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	10.0	700	A	A	Black
18217NXX		255/35R18	XL	94	W	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	9.5	580	A	A	Black
18154NXX		255/55R18	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	29.0	10.0	700	A	A	Black
18215NXX		255/65R18		111	H	4	51	2,403	-	7.5	7.0-9.0	10.2	31.1	10.0	700	A	A	Black
18159NXX		265/60R18		110	V	4	51	2,337	-	8.0	7.5-9.5	10.7	30.5	10.0	700	A	A	Black
18208NXX		225/55R19		99	V	4	51	1,709	-	7.0	6.0-8.0	9.2	28.8	10.0	700	A	A	Black
18211NXX		235/40R19	XL	96	W	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	9.5	580	A	A	Black
18201NXX		235/45R19	XL	99	W	4	50	1,709	-	8.0	7.5-9.0	9.3	27.4	9.5	580	A	A	Black
18168NXX		235/50R19	XL	103	V	4	50	1,929	-	7.5	6.5-8.5	9.6	28.3	10.0	700	A	A	Black
18202NXX		235/55R19	XL	105	V	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	10.0	700	A	A	Black
18197NXX		245/40R19	XL	98	W	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	9.5	580	A	A	Black
18200NXX		245/55R19		103	V	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	10.0	700	A	A	Black
18161NXX		255/40R19	XL	100	W	4	50	1,764	-	9.0	8.5-10.0	10.2	27.0	9.5	580	A	A	Black
18178NXX		255/45R19	XL	104	V	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	9.5	700	A	A	Black
18172NXX		255/60R19		109	H	4	51	2,271	-	7.5	7.0-9.0	10.2	31.1	10.0	700	A	A	Black
16692NXX		265/50R19	XL	110	W	4	50	2,337	-	8.5	7.5-9.5	10.9	29.5	9.5	580	A	A	Black
18195NXX		275/35R19	XL	100	W	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	9.5	580	A	A	Black

N5000 Platinum

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
								18198NXX		235/55R20					102	V	4	
18189NXX		245/35R20	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.8	26.8	9.5	580	A	A	Black
18218NXX		245/40R20	XL	99	W	4	50	1,709	-	8.5	8.0-9.5	9.8	27.7	9.5	580	A	A	Black
18163NXX		245/45R20	XL	103	W	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	9.5	580	A	A	Black
18294NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	10.0	700	A	A	Black
18206NXX		255/35R20	XL	97	W	4	50	1,609	-	9.0	8.5-10.0	10.2	27.0	9.5	580	A	A	Black
16872NXX		255/40R20	XL	101	Y	4	50	1,819	-	9.0	8.5-10.0	10.2	28.0	9.5	580	A	A	Black
18165NXX		255/45R20	XL	105	W	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	9.5	580	A	A	Black
18186NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	10.0	700	A	A	Black
18153NXX		255/55R20	XL	110	V	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	10.0	700	A	A	Black
18214NXX		265/45R20	XL	108	V	4	50	2,205	-	9.0	8.5-10.0	10.5	29.4	10.0	700	A	A	Black
18199NXX		265/50R20		107	V	4	51	2,149	-	8.5	7.5-9.5	10.9	30.5	10.0	700	A	A	Black
18207NXX		275/40R20	XL	106	W	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	9.5	580	A	A	Black
18219NXX		275/45R20	XL	110	V	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	10.0	700	A	A	Black
16523NXX		275/50R20	XL	113	W	4	50	2,535	-	8.5	7.5-9.5	11.2	30.9	9.5	580	A	A	Black
16687NXX		245/35R21	XL	96	W	4	50	1,565	-	8.5	8.0-9.5	9.8	27.8	9.5	580	A	A	Black
16574NXX		255/40R21	XL	102	W	4	50	1,874	-	9.0	8.5-10.0	10.2	29.0	9.5	580	A	A	Black
16522NXX		275/40R22	XL	107	W	4	50	2,149	-	9.5	9.0-11.0	10.9	30.7	9.5	580	A	A	Black

Technical data can be changed without further notice.

N'PRIZ AH8

GRAND TOURING ALL SEASON

The N'Priz AH8 is designed for family sedans that require all-year traction in dry, wet, and light snow conditions. Performance in light snow conditions is superior to its predecessor, the CP672.



**TOTAL
COVERAGE
WARRANTY**
NEXEN TIRE

**TREAD WEAR
WARRANTY**
75,000 MILES

**ROAD HAZARD
WARRANTY**
FIRST 3/32"
OR 2 YEARS

**ROADSIDE
ASSISTANCE**
36 MONTHS

FREE TRIAL
45 DAYS OR
500 MILES

OE FITMENT ON



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
14699NXX		185/65R14		86	H	4	44	1,168	-	5.5	5.0-6.5	7.4	23.5	9.0	600	A	A	Black	
17612NXX	P	185/60R15		84	H	4	44	1,102	-	5.5	5.0-6.5	7.4	23.7	9.0	440	A	A	Black	
14979NXX		185/65R15		88	H	4	44	1,235	-	5.5	5.0-6.5	7.4	24.4	9.0	500	A	A	Black	
15120NXX		195/60R15		88	H	4	44	1,235	-	6.0	5.5-7.0	7.9	24.2	9.0	600	A	A	Black	
13466NXX		195/65R15		91	T	4	44	1,356	-	6.0	5.5-7.0	7.9	25.0	9.0	500	A	A	Black	Kia
14386NXX		195/65R15		91	T	4	44	1,356	-	6.0	5.5-7.0	7.9	25.0	9.0	500	A	A	Black	Hyundai
15711NXX		195/65R15		91	H	4	44	1,356	-	6.0	5.5-7.0	7.9	25.0	9.0	500	A	A	Black	
15117NXX		205/65R15		94	H	4	44	1,477	-	6.0	5.5-7.5	8.2	25.5	9.0	600	A	A	Black	
15521NXX		185/55R16		83	H	4	51	1,074	-	6.0	5.0-6.5	7.6	24.0	9.0	600	A	A	Black	
16407NXX		185/60R16		86	H	4	51	1,168	-	5.5	5.0-6.5	7.4	24.7	9.0	600	A	A	Black	
15517NXX		195/50R16		84	V	4	51	1,102	-	6.0	5.5-7.0	7.9	23.7	9.0	600	A	A	Black	
15523NXX		195/55R16		87	V	4	51	1,201	-	6.0	5.5-7.0	7.9	24.4	9.0	600	A	A	Black	
15518NXX		205/50R16		87	V	4	51	1,201	-	6.5	5.5-7.5	8.4	24.1	9.0	600	A	A	Black	
14194NXX		205/55R16		91	H	4	44	1,356	-	6.5	5.5-7.5	8.4	24.9	10.0	560	A	A	Black	Hyundai
15710NXX		205/55R16		91	V	4	44	1,356	-	6.5	5.5-7.5	8.4	24.9	10.0	560	A	A	Black	
15605NXX		205/60R16		92	H	4	44	1,389	-	6.0	5.5-7.5	8.2	25.7	9.0	500	A	A	Black	Hyundai
13904NXX		205/65R16		95	H	4	44	1,521	-	6.0	5.5-7.5	8.2	26.5	10.0	440	A	A	Black	Kia
15677NXX	P	205/70R16		96	H	4	44	1,565	-	6.0	5.0-7.0	8.2	27.3	9.0	600	A	A	Black	
14369NXX		215/55R16	XL	97	H	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	10.0	440	A	A	Black	Ram
14691NXX		215/60R16		95	V	4	44	1,521	-	6.5	6.0-7.5	8.7	26.1	9.0	600	A	A	Black	

CONTINUED ON NEXT PAGE...

N'PRIZ AH8

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
14693NXX		215/65R16		98	V	4	44	1,653	-	6.5	6.0-7.5	8.7	27.0	9.0	600	A	A	Black	
14705NXX		225/55R16		95	V	4	51	1,521	-	7.0	6.0-8.0	9.2	25.7	9.0	600	A	A	Black	
14702NXX		225/60R16		98	V	4	44	1,653	-	6.5	6.0-8.0	9.0	26.6	9.0	600	A	A	Black	
15118NXX		225/65R16		100	H	4	44	1,764	-	6.5	6.0-8.0	9.0	27.5	9.0	600	A	A	Black	
15123NXX		235/60R16		100	H	4	44	1,764	-	7.0	6.5-8.5	9.4	27.1	9.0	600	A	A	Black	
15119NXX		235/65R16		103	H	4	44	1,929	-	7.0	6.5-8.5	9.4	28.0	9.0	600	A	A	Black	
15712NXX		205/50R17	XL	93	V	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	9.0	600	A	A	Black	
15530NXX		205/55R17		91	H	4	51	1,356	-	6.5	5.5-7.5	8.4	25.9	9.0	500	A	A	Black	VW
16094NXX		205/55R17		91	H	4	51	1,356	-	6.5	5.5-7.5	8.4	25.9	9.0	500	A	A	Black	Hyundai
14749NXX		215/45R17		87	H	4	44	1,201	-	7.0	7.0-8.0	8.4	24.6	9.0	500	A	A	Black	Hyundai
14697NXX		215/50R17		91	V	4	51	1,356	-	7.0	6.0-7.5	8.9	25.5	9.0	600	A	A	Black	
16383NXX		215/55R17		94	V	4	44	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	500	A	A	Black	Hyundai
14698NXX		215/60R17		96	V	4	44	1,565	-	6.5	6.0-7.5	8.7	27.2	9.0	600	A	A	Black	
14198NXX		225/45R17		91	W	4	44	1,356	-	7.5	7.0-8.5	8.9	25.0	9.0	500	A	A	Black	Hyundai
14701NXX		225/50R17		94	V	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	9.0	600	A	A	Black	
14694NXX		225/55R17		97	V	4	51	1,609	-	7.0	6.0-8.0	9.2	26.8	9.0	600	A	A	Black	
15121NXX		225/60R17		99	H	4	44	1,709	-	6.5	6.0-8.0	9.0	27.6	9.0	600	A	A	Black	
14753NXX		235/45R17		94	V	4	51	1,477	-	8.0	7.5-9.0	9.3	25.4	9.0	600	A	A	Black	
15353NXX		235/50R17		96	H	4	51	1,565	-	7.5	6.5-8.5	9.6	26.3	9.0	600	A	A	Black	
14704NXX		235/55R17		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	9.0	600	A	A	Black	
14712NXX		245/45R17		95	V	4	51	1,521	-	8.0	7.5-9.0	9.6	25.7	9.0	600	A	A	Black	
15520NXX	P	245/50R17		98	V	4	51	1,653	-	7.5	7.0-8.5	10.0	26.7	9.0	600	A	A	Black	
17613NXX		215/45R18		89	V	4	44	1,279	-	7.0	7.0-8.0	8.4	25.6	9.0	440	A	A	Black	
15359NXX		215/55R18		95	H	4	51	1,521	-	7.0	6.0-7.5	8.9	27.3	9.0	600	A	A	Black	
14708NXX		225/40R18		88	W	4	51	1,235	-	8.0	7.5-9.0	9.1	25.1	9.0	500	A	A	Black	Hyundai
15348NXX		225/45R18		91	H	4	51	1,356	-	7.5	7.0-8.5	8.9	25.9	9.0	600	A	A	Black	
14706NXX		225/50R18		95	V	4	51	1,521	-	7.0	6.0-8.0	9.2	26.9	9.0	600	A	A	Black	
14710NXX		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	9.0	600	A	A	Black	
15122NXX		225/60R18		100	H	4	44	1,764	-	6.5	6.0-8.0	9.0	28.6	9.0	600	A	A	Black	
15346NXX		235/40R18		91	H	4	51	1,356	-	8.5	8.0-9.5	9.5	25.4	9.0	600	A	A	Black	
15349NXX		235/45R18		94	H	4	51	1,477	-	8.0	7.5-9.0	9.3	26.3	9.0	600	A	A	Black	
15356NXX		235/50R18		97	H	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.0	600	A	A	Black	
15524NXX		235/55R18		100	H	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	9.0	600	A	A	Black	
14714NXX		245/40R18		93	V	4	51	1,433	-	8.5	8.0-9.5	9.8	25.7	9.0	600	A	A	Black	
15351NXX		245/45R18		96	H	4	51	1,565	-	8.0	7.5-9.0	9.6	26.7	9.0	600	A	A	Black	
15357NXX		245/50R18		100	H	4	51	1,764	-	7.5	7.0-8.5	10.0	27.7	9.0	600	A	A	Black	
15525NXX	P	245/55R18		102	H	4	51	1,874	-	7.5	7.0-8.5	10.0	28.6	9.0	600	A	A	Black	
15360NXX		225/55R19		99	H	4	51	1,709	-	7.0	6.0-8.0	9.2	28.8	9.0	600	A	A	Black	

Technical data can be changed without further notice. For more detailed OE application information, please refer to "Original Equipment 2025" page.

PERFORMANCE RATINGS



N'PRIZ AH5

STANDARD TOURING ALL SEASON

The N'Priz AH5 has four wide longitudinal grooves that improve drainage performance; a rigid shoulder block design to enhance cornering, handling, and a quiet, comfortable ride; and a dual-kerf design to enhance block stiffness and mileage.



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
16406NXX		165/65R14		79	S	4	51	963	-	5.0	4.5-6.0	6.7	22.4	9.0	460	A	A	Black
15011NXX		175/65R14	XL	86	T	4	50	1,168	-	5.0	5.0-6.0	7.0	23.0	9.0	460	A	A	Black
15129NXX		175/70R14		84	T	4	44	1,102	-	5.0	4.5-6.0	7.0	23.7	9.0	460	A	A	Black
12561NXX	P	185/60R14		82	H	4	44	1,047	-	5.5	5.0-6.5	7.4	22.8	9.0	460	A	A	Black
15139NXX	P	185/65R14		85	T	4	44	1,124	-	5.5	5.0-6.5	7.4	23.5	9.0	460	A	A	Black
15399NXX		185/70R14		88	T	4	44	1,235	-	5.5	4.5-6.0	7.4	24.3	9.0	460	A	A	Black
12562NXX	P	195/60R14		85	H	4	44	1,135	-	6.0	5.5-7.0	7.9	23.2	9.0	460	A	A	Black
15400NXX		195/70R14		91	T	4	44	1,356	-	6.0	5.0-6.5	7.9	24.8	9.0	460	A	A	Black
15403NXX		195/75R14		92	S	4	44	1,389	-	5.5	5.0-6.5	7.7	25.5	9.0	460	A	A	White
15404NXX		205/75R14		95	S	4	44	1,521	-	5.5	5.0-7.0	8.0	26.1	9.0	460	A	A	White
15401NXX		215/70R14		96	T	4	44	1,565	-	6.5	5.5-7.0	8.7	25.9	9.0	460	A	A	White
15130NXX		175/65R15		84	H	4	44	1,102	-	5.0	5.0-6.0	7.0	24.0	9.0	460	A	A	Black
15138NXX		185/55R15		82	H	4	51	1,047	-	6.0	5.0-6.5	7.6	23.0	9.0	460	A	A	Black
15134NXX		185/60R15		84	T	4	44	1,102	-	5.5	5.0-6.5	7.4	23.7	9.0	460	A	A	Black
14658NXX		185/65R15		88	H	4	44	1,235	-	5.5	5.0-6.5	7.4	24.4	9.0	460	A	A	Black
12558NXX	P	195/55R15	XL	87	V	4	50	1,201	-	6.0	5.5-7.0	7.9	23.4	9.0	460	A	A	Black
15145NXX	P	195/60R15		87	T	4	44	1,190	-	6.0	5.5-7.0	7.9	24.2	9.0	460	A	A	Black
15140NXX	P	195/65R15		89	T	4	44	1,279	-	6.0	5.5-7.0	7.9	25.0	10.0	460	A	A	Black
12564NXX	P	205/60R15		90	H	4	44	1,301	-	6.0	5.5-7.5	8.2	24.7	9.0	460	A	A	Black
15141NXX	P	205/65R15		92	T	4	44	1,400	-	6.0	5.5-7.5	8.2	25.5	9.0	460	A	A	Black
14661NXX		205/70R15		96	T	4	44	1,565	-	6.0	5.0-7.0	8.2	26.3	9.0	460	A	A	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
7



COMFORT
8



FUEL EFFICIENCY
6



HANDLING
7



WEAR LIFE
7

N'PRIZ AH5

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
15405NXX		205/75R15		97	S	4	44	1,609	-	5.5	5.0-7.0	8.0	27.1	9.0	460	A	A	White
15142NXX	P	215/65R15		95	T	4	44	1,510	-	6.5	6.0-7.5	8.7	26.0	9.0	460	A	A	Black
14662NXX		215/70R15		98	T	4	44	1,653	-	6.5	5.5-7.0	8.7	26.9	9.0	460	A	A	Black
15406NXX		215/75R15		100	S	4	44	1,764	-	6.0	5.5-7.0	8.5	27.7	9.0	460	A	A	White
15402NXX		225/70R15		100	T	4	44	1,764	-	6.5	6.0-7.5	9.0	27.4	9.0	460	A	A	White
15407NXX		225/75R15		102	S	4	44	1,874	-	6.0	6.0-7.5	8.8	28.3	9.0	460	A	A	White
15408NXX		235/75R15	XL	109	S	4	50	2,271	-	6.5	6.0-8.0	9.3	28.9	9.0	460	A	A	White
15148NXX	P	205/55R16		89	T	4	44	1,279	-	6.5	5.5-7.5	8.4	24.9	10.0	460	A	A	Black
15146NXX	P	205/60R16		91	T	4	44	1,356	-	6.0	5.5-7.5	8.2	25.7	9.0	460	A	A	Black
15131NXX		205/65R16		95	T	4	44	1,521	-	6.0	5.5-7.5	8.2	26.5	9.0	460	A	A	Black
15147NXX		215/60R16		95	T	4	44	1,521	-	6.5	6.0-7.5	8.7	26.1	9.0	460	A	A	Black
15143NXX		215/65R16		98	T	4	44	1,653	-	6.5	6.0-7.5	8.7	27.0	9.0	460	A	A	Black
15136NXX		225/60R16		98	T	4	44	1,653	-	6.5	6.0-8.0	9.0	26.6	9.0	460	A	A	Black
15137NXX		235/60R16		100	T	4	44	1,764	-	7.0	6.5-8.5	9.4	27.1	9.0	460	A	A	Black
15144NXX		235/65R16		103	T	4	44	1,929	-	7.0	6.5-8.5	9.4	28.0	9.0	460	A	A	Black
15152NXX		215/50R17		91	H	4	51	1,356	-	7.0	6.0-7.5	8.9	25.5	9.0	460	A	A	Black
15149NXX		215/55R17		94	H	4	51	1,477	-	7.0	6.0-7.5	8.9	26.3	9.0	460	A	A	Black
* 13022NXX		215/60R17		96	T	4	44	1,565	-	6.5	6.0-7.5	8.7	27.2	9.0	460	A	A	Black
18987NXX		215/60R17		96	H	4	44	1,565	-	6.5	6.0-7.5	8.7	27.2	9.0	460	A	A	Black
* 15132NXX		215/65R17		99	T	4	44	1,709	-	6.5	6.0-7.5	8.7	28.0	9.0	460	A	A	Black
18986NXX		215/65R17		99	H	4	44	1,709	-	6.5	6.0-7.5	8.7	28.0	9.0	460	A	A	Black
14653NXX		225/50R17		94	V	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	9.0	460	A	A	Black
* 15153NXX		225/50R17		94	T	4	51	1,477	-	7.0	6.0-8.0	9.2	25.9	9.0	460	A	A	Black
15007NXX		225/55R17		97	H	4	36	1,609	-	7.0	6.0-8.0	9.2	26.8	9.0	460	A	A	Black
* 15150NXX		225/55R17		97	T	4	36	1,609	-	7.0	6.0-8.0	9.2	26.8	9.0	460	A	A	Black
14907NXX		225/60R17		99	H	4	44	1,709	-	6.5	6.0-8.0	9.0	27.6	9.0	460	A	A	Black
* 15135NXX		225/60R17		99	T	4	44	1,709	-	6.5	6.0-8.0	9.0	27.6	9.0	460	A	A	Black
15124NXX		225/65R17		102	H	4	44	1,874	-	6.5	6.0-8.0	9.0	28.5	9.0	460	A	A	Black
* 15133NXX		225/65R17		102	T	4	44	1,874	-	6.5	6.0-8.0	9.0	28.5	9.0	460	A	A	Black
15151NXX		235/55R17		99	H	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	9.0	460	A	A	Black
14976NXX		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	9.0	500	A	A	Black
15207NXX		225/45R18	XL	95	V	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	9.0	500	A	A	Black
15001NXX		225/50R18		95	V	4	51	1,521	-	7.0	6.0-8.0	9.2	26.9	9.0	500	A	A	Black
14927NXX		225/55R18		98	H	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	9.0	500	A	A	Black
15014NXX		225/60R18		100	H	4	51	1,764	-	6.5	6.0-8.0	9.0	28.6	9.0	500	A	A	Black
14908NXX		235/45R18		94	V	4	51	1,477	-	8.0	7.5-9.0	9.3	26.3	9.0	500	A	A	Black
15037NXX		235/50R18		97	H	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.0	500	A	A	Black
14910NXX		235/55R18		100	H	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	9.0	500	A	A	Black
14911NXX		235/60R18	XL	107	H	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	9.0	500	A	A	Black
14941NXX		235/65R18		106	H	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	9.0	500	A	A	Black
15038NXX		245/45R18	XL	100	V	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	9.0	500	A	A	Black
14904NXX		245/60R18		105	H	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	9.0	500	A	A	Black
14938NXX		225/55R19		99	H	4	51	1,709	-	7.0	6.0-8.0	9.2	28.8	9.0	500	A	A	Black
15206NXX		235/40R19	XL	96	V	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	9.0	500	A	A	Black
15044NXX		235/45R19		95	H	4	51	1,521	-	8.0	7.5-9.0	9.3	27.4	9.0	500	A	A	Black
15079NXX		235/50R19		99	H	4	51	1,709	-	7.5	6.5-8.5	9.6	28.3	9.0	500	A	A	Black
14971NXX		235/55R19		101	H	4	51	1,819	-	7.5	6.5-8.5	9.6	29.2	9.0	500	A	A	Black
15043NXX		235/55R20		102	H	4	51	1,874	-	7.5	6.5-8.5	9.6	30.2	9.0	500	A	A	Black
15219NXX		245/50R20		102	H	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	9.0	500	A	A	Black
15010NXX		255/50R20		105	H	4	51	2,039	-	8.0	7.0-9.0	10.4	30.1	9.0	500	A	A	Black
14985NXX		255/55R20		107	H	4	51	2,149	-	8.0	7.0-9.0	10.4	31.0	9.0	500	A	A	Black

SB-802

STANDARD TOURING ALL SEASON



**TOTAL
COVERAGE
WARRANTY**
NEXEN TIRE



TREAD WEAR
WARRANTY
N/A




ROAD HAZARD
WARRANTY
N/A



ROADSIDE
ASSISTANCE
36 MONTHS

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
11766NXX		165/80R15		87	T	4	36	1,201	-	4.5	4.0-5.5	6.5	25.4	10.0	320	A	B	Black

Technical data can be changed without further notice.

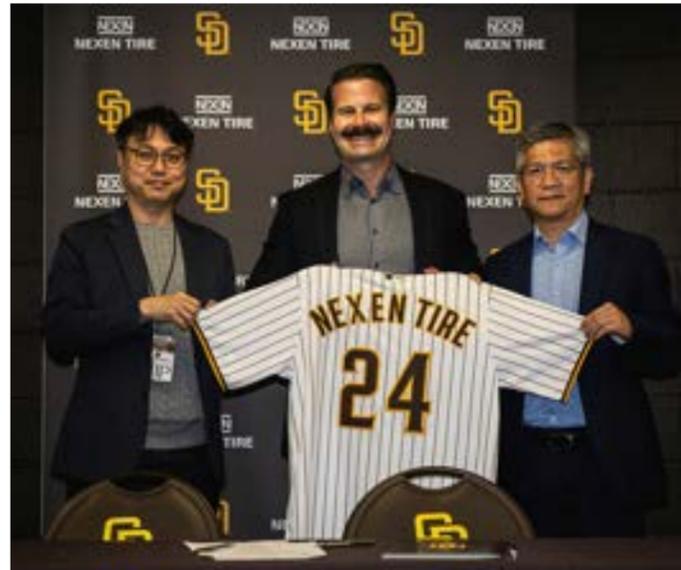

NEXEN NEXEN TIRE | 
we got you

EXCLUSIVE TIRE PARTNER OF THE SAN DIEGO PADRES

"We are thrilled to embark on this partnership with the San Diego Padres. This is a very exciting milestone for NEXEN TIRE as we look forward to unlocking new levels of sports marketing experience. We are excited to engage with the community and the team's devoted fan base."

Brian YoonSeok Han,
CEO of Nexen Tire America, Inc.

ROADIAN HP

STREET SPORT TRUCK ALL SEASON

The Roadian HP includes a V-shaped directional pattern design, which provides high-performance grip on any road surface. This tire also features a five random pitch variation design that reduces pattern noise, and wide and deep directional grooves to provide excellent drainage and braking performance, while the large shoulder blocks maximize cornering grip.



**TOTAL
COVERAGE
WARRANTY**
NEXEN TIRE



TREAD WEAR
WARRANTY
40,000 MILES



ROAD HAZARD
WARRANTY
FIRST 3/32"
OR 2 YEARS



ROADSIDE
ASSISTANCE
36 MONTHS

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
11006NXX		255/60R17		106	V	4	44	2,094	-	7.5	7.0-9.0	10.2	29.1	11.0	460	A	A	Black
15451NXX		265/60R17		108	V	4	44	2,205	-	8.0	7.5-9.5	10.7	29.5	11.0	460	A	A	Black
15453NXX		275/60R17		110	V	4	44	2,337	-	8.0	7.5-9.5	11.0	30.0	11.0	460	A	A	Black
15608NXX		265/60R18		110	H	4	44	2,337	-	8.0	7.5-9.5	10.7	30.5	11.0	460	A	A	Black
15455NXX		285/60R18		116	V	4	44	2,756	-	8.5	8.0-10.0	11.5	31.5	11.0	460	A	A	Black
15467NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	11.0	460	A	A	Black
15469NXX		265/50R20	XL	111	V	4	50	2,403	-	8.5	7.5-9.5	10.9	30.5	11.0	460	A	A	Black
15470NXX		275/40R20	XL	106	V	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	11.0	460	A	A	Black
15454NXX		275/45R20	XL	110	V	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	11.0	460	A	A	Black
15471NXX		275/55R20	XL	117	V	4	50	2,833	-	8.5	7.5-9.5	11.2	31.9	11.0	460	A	A	Black
15473NXX		285/50R20	XL	116	V	4	50	2,756	-	9.0	8.0-10.0	11.7	31.3	11.0	460	A	A	Black
15463NXX		295/40R20		106	V	4	44	2,094	-	10.5	10.0-11.5	11.9	29.3	11.0	460	A	A	Black
15459NXX		295/45R20	XL	114	V	4	50	2,601	-	10.0	9.5-11.0	11.7	30.5	11.0	460	A	A	Black
15464NXX		255/30R22	XL	95	V	4	50	1,521	-	9.0	8.5-9.5	10.2	28.1	11.0	460	A	A	Black
15456NXX		265/35R22	XL	102	V	4	50	1,874	-	9.5	9.0-10.5	10.7	29.3	11.0	460	A	A	Black
15472NXX		285/35R22	XL	106	V	4	50	2,094	-	10.0	9.5-11.0	11.4	29.9	11.0	460	A	A	Black
15466NXX		285/45R22	XL	114	V	4	50	2,601	-	9.5	9.0-10.5	11.2	32.1	11.0	460	A	A	Black
15457NXX		295/30R22	XL	103	V	4	50	1,929	-	10.5	10.0-11.0	11.9	29.0	11.0	460	A	A	Black
15460NXX		305/40R22	XL	114	V	4	50	2,601	-	11.0	10.0-12.0	12.3	31.6	11.0	460	A	A	Black
15452NXX		305/45R22	XL	118	V	4	50	2,910	-	10.0	9.5-11.5	11.9	32.8	11.0	460	A	A	Black
15474NXX		295/35R24	XL	110	V	4	50	2,337	-	10.5	10.0-11.5	11.9	32.1	11.0	460	A	A	Black
15354NXX		305/35R24	XL	112	V	4	50	2,469	-	11.0	10.0-12.0	12.3	32.4	11.0	460	A	A	Black

Technical data can be changed without further notice.

PERFORMANCE RATINGS



BRAKING
8



COMFORT
7



FUEL EFFICIENCY
8



HANDLING
9



WEAR LIFE
8

ROADIAN GTX

CUV/SUV TOURING

The Roadian GTX delivers on every count. Crossovers and SUVs are more popular than ever, and their segment of the market is only increasing. Drivers count on their versatility and dependability, from cross-country road trips to trips to the store. They need a tire with a long tread life, all-season traction, the best mileage, and a comfortable ride. The Nexen Roadian GTX touring tire meets these needs and exceeds expectations.



TREAD WEAR WARRANTY
70,000 MILES



ROAD HAZARD WARRANTY
FIRST 3/32" OR 2 YEARS



ROADSIDE ASSISTANCE
36 MONTHS



FREE TRIAL
45 DAYS OR 500 MILES

OE FITMENT ON



Product Code	P/LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG		Sidewall	OE	
								S	D	Measuring	Approved				Tread-wear	Trac. Temp.			
17063NXX		205/70R16		97	H	4	51	1,609	-	6.0	5.0-7.0	8.2	27.3	9.5	680	A	A	Black	
17058NXX		215/65R16		98	V	4	51	1,653	-	6.5	6.0-7.5	8.7	27.0	9.5	680	A	A	Black	
17064NXX		215/70R16		100	H	4	51	1,764	-	6.5	5.5-7.0	8.7	27.9	9.5	680	A	A	Black	
17065NXX		235/70R16		106	H	4	51	2,094	-	7.0	6.0-8.0	9.4	29.0	9.5	680	A	A	Black	
17050NXX		215/60R17		96	H	4	51	1,565	-	6.5	6.0-7.5	8.7	27.2	9.5	680	A	A	Black	
17076NXX		215/65R17		99	H	4	51	1,709	-	6.5	6.0-7.5	8.7	28.0	9.5	600	A	A	Black	
14084NXX		225/60R17		99	H	4	51	1,709	-	6.5	6.0-8.0	9.0	27.6	9.5	680	A	A	Black	
17060NXX		225/65R17		102	V	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	9.5	680	A	A	Black	
17044NXX		235/55R17		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	27.2	9.5	680	A	A	Black	
17054NXX		235/60R17		102	H	4	51	1,874	-	7.0	6.5-8.5	9.4	28.1	9.5	680	A	A	Black	
16581NXX		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	9.5	600	A	A	Black	Hyundai
17136NXX		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	9.5	600	A	A	Black	Kia
17061NXX		245/65R17		107	V	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	9.5	680	A	A	Black	
17041NXX		215/55R18	XL	99	V	4	50	1,709	-	7.0	6.0-7.5	8.9	27.3	9.5	680	A	A	Black	
14120NXX		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	9.5	680	A	A	Black	
17052NXX		225/60R18	XL	104	H	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	9.5	680	A	A	Black	

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
8



COMFORT
10



FUEL EFFICIENCY
9



HANDLING
10



WEAR LIFE
10



SNOW TRACTION
6

ROADIAN GTX

CONTINUED FROM PREVIOUS PAGE

Product Code	P/LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG		Sidewall	OE	
								S	D	Measuring	Approved				Tread-wear	Trac. Temp.			
17036NXX		235/50R18		97	V	4	51	1,609	-	7.5	6.5-8.5	9.6	27.3	9.5	680	A	A	Black	
14081NXX		235/55R18	XL	104	V	4	50	1,984	-	7.5	6.5-8.5	9.6	28.1	9.5	680	A	A	Black	
10398NXX		235/60R18	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	9.5	680	A	A	Black	
NEW 10281NXX		235/60R18		103	H	4	51	1,929	-	7.0	6.5-8.5	9.4	29.1	9.5	600	A	A	Black	Hyundai
10408NXX		235/65R18		106	V	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	9.5	600	A	A	Black	
10416NXX		245/60R18		105	V	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	9.5	680	A	A	Black	
17048NXX		255/55R18	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	29.0	9.5	680	A	A	Black	
17056NXX		255/60R18		108	H	4	51	2,205	-	7.5	7.0-9.0	10.2	30.0	9.5	680	A	A	Black	
10400NXX		255/65R18		111	H	4	51	2,403	-	7.5	7.0-9.0	10.2	31.1	9.5	680	A	A	Black	
17057NXX		265/60R18		110	H	4	51	2,337	-	8.0	7.5-9.5	10.7	30.5	9.5	680	A	A	Black	
17043NXX		225/55R19	XL	103	V	4	50	1,929	-	7.0	6.0-8.0	9.2	28.8	9.5	680	A	A	Black	
17033NXX		235/45R19		95	H	4	51	1,521	-	8.0	7.5-9.0	9.3	27.4	9.5	680	A	A	Black	
10405NXX		235/50R19		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	28.3	9.5	680	A	A	Black	
* 16583NXX		235/55R19		101	H	4	51	1,819	-	7.5	6.5-8.5	9.6	29.2	9.5	680	A	A	Black	
15506NXX		235/55R19	XL	105	V	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	9.5	680	A	A	Black	
** 19812NXX		235/60R19	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	30.1	9.5	680	A	A	Black	
17034NXX		245/45R19	XL	102	V	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	9.5	680	A	A	Black	
10403NXX		245/50R19	XL	105	W	4	50	2,039	-	7.5	7.0-8.5	10.0	28.7	9.5	680	A	A	Black	
17047NXX		245/55R19		103	V	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	9.5	680	A	A	Black	
17407NXX		255/50R19	XL	107	H	4	50	2,149	-	8.0	7.0-9.0	10.4	29.1	9.5	680	A	A	Black	
17414NXX		255/55R19	XL	111	V	4	50	2,403	-	8.0	7.0-9.0	10.4	30.0	9.5	680	A	A	Black	
17566NXX		255/60R19		109	H	4	51	2,271	-	7.5	7.0-9.0	10.2	31.1	9.5	680	A	A	Black	
15221NXX		265/55R19	XL	113	W	4	50	2,535	-	8.5	7.5-9.5	10.9	30.5	9.5	680	A	A	Black	
17413NXX		275/55R19		111	V	4	51	2,403	-	8.5	7.5-9.5	11.2	30.9	9.5	680	A	A	Black	
** 19805NXX		235/50R20	XL	104	W	4	50	1,984	-	7.5	6.5-8.5	9.6	29.3	9.5	680	A	A	Black	
14156NXX		235/55R20		102	V	4	51	1,874	-	7.5	6.5-8.5	9.6	30.2	9.5	680	A	A	Black	
17035NXX		245/45R20	XL	103	V	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	9.5	680	A	A	Black	
14079NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	9.5	680	A	A	Black	
NEW 19024NXX		255/40R20	XL	101	W	4	50	1,819	-	9.0	8.5-10.0	10.2	29.0	9.5	680	A	A	Black	
NEW 16640NXX	P	255/45R20		101	W	4	51	1,819	-	8.5	8.0-9.5	10.0	29.1	9.5	680	A	A	Black	Mitsubishi
NEW 17001NXX	P	255/45R20		101	W	4	51	1,819	-	8.5	8.0-9.5	10.0	29.1	9.5	680	A	A	Black	Mitsubishi
17039NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	9.5	680	A	A	Black	
18071NXX		255/50R20		105	T	4	51	2,039	-	8.0	7.0-9.0	10.4	30.1	9.5	680	A	A	Black	VW
10406NXX		255/55R20	XL	110	V	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	9.5	680	A	A	Black	
10404NXX		265/45R20	XL	108	V	4	50	2,205	-	9.0	8.5-10.0	10.5	29.4	9.5	680	A	A	Black	
17040NXX		265/50R20	XL	111	V	4	50	2,403	-	8.5	7.5-9.5	10.9	30.5	9.5	680	A	A	Black	
17406NXX		275/40R20	XL	106	W	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	9.5	680	A	A	Black	
17408NXX		275/45R20	XL	110	V	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	9.5	680	A	A	Black	
10407NXX		275/50R20	XL	113	W	4	50	2,535	-	8.5	7.5-9.5	11.2	30.9	9.5	680	A	A	Black	
17409NXX		275/55R20		113	H	4	51	2,535	-	8.5	7.5-9.5	11.2	31.9	9.5	680	A	A	Black	
10382NXX		285/50R20		112	V	4	51	2,469	-	9.0	8.0-10.0	11.2	31.2	9.5	680	A	A	Black	
** 1A070NXX		235/50R21		101	W	4	51	1,819	-	7.5	6.5-8.5	9.6	30.3	9.5	680	A	A	Black	
NEW 19023NXX		265/40R21	XL	105	V	4	50	2,039	-	9.5	9.0-10.5	10.4	29.3	9.5	680	A	A	Black	
NEW 19026NXX		265/45R21	XL	108	W	4	50	2,205	-	9.0	8.5-10.0	10.5	30.4	9.5	680	A	A	Black	
NEW 19032NXX		275/40R21	XL	107	V	4	50	2,149	-	9.5	9.0-11.0	10.9	29.7	9.5	680	A	A	Black	
NEW 19030NXX		275/45R21	XL	110	W	4	50	2,337	-	9.0	8.5-10.5	10.7	30.7	9.5	680	A	A	Black	
15225NXX		265/40R22	XL	106	W	4	50	2,094	-	9.5	9.0-10.5	10.7	30.4	9.5	680	A	A	Black	
10436NXX		275/40R22	XL	108	V	4	50	2,205	-	9.5	9.0-11.0	10.9	30.7	9.5	680	A	A	Black	
15495NXX		275/45R22	XL	112	W	4	50	2,469	-	9.0	8.5-10.5	10.7	31.8	9.5	680	A	A	Black	
10383NXX		2																	

ROADIAN HTX2

HIGHWAY TERRAIN

Designed for the long-inspired journey to create a high-mileage SUV and Light Truck tire that also delivers outstanding all-weather driving performance. Designed, engineered, and constructed with technical features only found in the Roadian HTX2, compromise is no longer a part of your tire-buying equation.



OE FITMENT ON **Jeep**

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG		Sidewall	OE	
								S	D	Measuring	Approved				Tread-wear	Trac. Temp.			
17990NXX		225/70R16		103	T	4	51	1,929	-	6.5	6.0-7.5	9.0	28.4	11.0	700	A	B	White	
17984NXX		225/75R16	XL	108	T	4	50	2,205	-	6.0	6.0-7.5	8.8	29.3	11.0	700	A	B	White	
17980NXX		235/70R16	XL	109	T	4	50	2,271	-	7.0	6.0-8.0	9.4	29.0	11.0	700	A	B	White	
17976NXX		235/75R16		108	T	4	51	2,205	-	6.5	6.0-8.0	9.3	29.8	11.0	700	A	B	White	
17977NXX		245/70R16		107	T	4	51	2,149	-	7.0	6.5-8.0	9.8	29.5	11.0	700	A	B	White	
17988NXX		245/75R16		111	T	4	51	2,403	-	7.0	6.5-8.0	9.8	30.5	11.0	700	A	B	White	
17993NXX		255/65R16		109	T	4	51	2,271	-	7.5	7.0-9.0	10.2	29.1	11.0	700	A	B	White	
17992NXX		255/70R16		111	T	4	51	2,403	-	7.5	6.5-8.5	10.2	30.1	11.0	700	A	B	White	
17989NXX		265/70R16		112	T	4	51	2,469	-	8.0	7.0-9.0	10.7	30.6	12.0	700	A	B	White	
17978NXX		265/75R16		116	T	4	51	2,756	-	7.5	7.0-9.0	10.5	31.7	12.0	700	A	B	White	
17970NXX		225/65R17		102	H	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	11.0	700	A	A	Black	
17960NXX		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	11.0	700	A	A	Black	
17982NXX		245/65R17		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	11.0	700	A	B	White	
17983NXX		245/70R17		110	T	4	51	2,337	-	7.0	6.5-8.0	9.8	30.6	11.0	700	A	B	White	
11717NXX		245/75R17		112	S	4	51	2,469	-	7.0	6.5-7.5	9.8	31.5	11.0	700	A	A	Black	Jeep
17991NXX		255/65R17		110	T	4	51	2,337	-	7.5	7.0-9.0	10.2	30.1	11.0	700	A	B	White	

No Road Hazard & Mileage Warranty on commercial delivery van sizes (LT225/75R16 & 235/65R16C). Warranty limited to manufacture defects only.

CONTINUED ON NEXT PAGE...

ROADIAN HTX2

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG		Sidewall	OE	
								S	D	Measuring	Approved				Tread-wear	Trac. Temp.			
17994NXX		255/70R17		112	T	4	51	2,469	-	7.5	6.5-8.5	10.2	31.1	11.0	700	A	B	White	
17987NXX		265/65R17		112	T	4	51	2,469	-	8.0	7.5-9.5	10.7	30.6	12.0	700	A	B	White	
17103NXX		265/70R17		115	T	4	51	2,679	-	8.0	7.0-9.0	10.7	31.7	12.0	700	A	B	White	
17955NXX		235/60R18		103	H	4	51	1,929	-	7.0	6.5-8.5	9.4	29.1	11.0	700	A	A	Black	
17963NXX		235/65R18		106	H	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	11.0	700	A	A	Black	
17966NXX		245/60R18		105	H	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	11.0	700	A	A	Black	
17949NXX		255/65R18		111	T	4	51	2,403	-	7.5	7.0-9.0	10.2	31.1	11.0	700	A	A	Black	
17975NXX		255/70R18		113	T	4	51	2,535	-	7.5	6.5-8.5	10.2	32.1	11.0	700	A	A	Black	
17962NXX		265/60R18		110	H	4	51	2,337	-	8.0	7.5-9.5	10.7	30.5	12.0	700	A	A	Black	
17967NXX		265/65R18		114	T	4	51	2,601	-	8.0	7.5-9.5	10.7	31.5	12.0	700	A	A	Black	
17968NXX		265/70R18		116	T	4	51	2,756	-	8.0	7.0-9.0	10.7	32.6	12.0	700	A	A	Black	
17972NXX		275/65R18		116	T	4	51	2,756	-	8.0	7.5-9.5	11.0	32.1	12.0	700	A	A	Black	
17965NXX		245/55R19		103	T	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	11.0	700	A	A	Black	
17956NXX		255/60R19		109	H	4	51	2,271	-	7.5	7.0-9.0	10.2	31.1	11.0	700	A	A	Black	
17974NXX		245/60R20		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	31.6	11.0	700	A	A	Black	
17948NXX		255/50R20		105	H	4	51	2,039	-	8.0	7.0-9.0	10.4	30.1	11.0	700	A	A	Black	
17969NXX		255/55R20		107	H	4	51	2,149	-	8.0	7.0-9.0	10.4	31.0	11.0	700	A	A	Black	
11696NXX		255/60R20	XL	113	T	4	50	2,535	-	7.5	7.0-9.0	10.0	32.0	11.0	700	A	A	Black	Jeep
17950NXX		265/50R20		107	T	4	51	2,149	-	8.5	7.5-9.5	10.9	30.5	12.0	700	A	A	Black	
NEW 19194NXX		265/60R20		112	H	4	51	2,469	-	8.0	7.5-9.5	10.7	32.5	12.0	700	A	A	Black	
17964NXX		275/55R20		113	H	4	51	2,535	-	8.5	7.5-9.5	11.2	31.9	12.0	700	A	A	Black	
17957NXX		275/60R20		115	H	4	51	2,679	-	8.0	7.5-9.5	11.0	33.0	12.0	700	A	A	Black	
17973NXX		285/45R22	XL	114	H	4	50	2,601	-	9.5	9.0-10.5	11.2	32.1	11.0	700	A	A	Black	
17954NXX	LT	215/85R16		115/112	R	10	80	2,680	2,470	6.0	5.5-7.0	8.5	30.4	14.5	-	-	-	Black	
17417NXX	LT	225/75R16		115/112	R	10	80	2,680	2,470	6.0	6.0-7.5	8.8	29.3	14.5	-	-	-	Black	
18064NXX		235/65R16		121/119	R	10	83	3,197	2,998	7.0	6.5-7.5	9.4	28.0	12.5	-	-	-	Black	
17958NXX	LT	235/85R16		120/116	S	10	80	3,042	2,778	6.5	6.0-7.5	9.3	31.7	14.5	-	-	-	Black	
17959NXX	LT	245/75R16		120/116	S	10	80	3,042	2,778	7.0	6.5-8.0	9.8	30.5	14.5	-	-	-	Black	
17981NXX	LT	265/75R16		123/120	S	10	80	3,415	3,085	7.5	7.0-9.0	10.5	31.7	14.5	-	-	-	White	
17971NXX	LT	235/80R17		120/117	S	10	80	3,085	2,835	6.5	6.0-8.0	9.3	31.8	14.5	-	-	-	Black	
17985NXX	LT	245/70R17		119/116	S	10	80	3,000	2,755	7.0	6.5-8.0	9.8	30.6	14.5	-	-	-	White	
17986NXX	LT	245/75R17		121/118	S	10	80	3,195	2,910	7.0	6.5-8.0	9.8	31.5	14.5	-	-	-	White	
18830NXX	LT	265/70R17		123/120	S	10	80	3,415	3,085	8.0	7.0-9.0	10.7	31.7	14.5	-	-	-	White	
17953NXX	LT	275/65R18		123/120	S	10	80	3,415	3,085	8.0	8.0-9.5	11.0	32.1	14.5	-	-	-	Black	
17951NXX	LT	275/70R18		125/122	S	10	80	3,640	3,305	8.0	7.0-9.0	11.0	33.2	14.5	-	-	-	Black	
17961NXX	LT	265/60R20		121/118	S	10	80	3,195	2,910	8.0	8.0-9.5	10.7	32.5	14.5	-	-	-	Black	
17947NXX	LT	275/65R20		126/123	S	10	80	3,750	3,415	8.0	8.0-9.5	11.0	34.1	14.5	-	-	-	Black	
17952NXX	LT	285/60R20		125/122	S	10	80	3,640	3,305	8.5	8.5-10.0	11.5	33.5	14.5	-	-	-	Black	

Technical data can be changed without further notice. For more detailed OE application information, please refer to "Original Equipment 2025" page.

DUAL SIDEWALL OPTIONS ▾

WHITE SIDEWALL OPTION ▾



PERFORMANCE RATINGS



BRAKING
8



COMFORT
9



FUEL EFFICIENCY
8



HANDLING
8



WEAR LIFE
10



3 Peak Mountain Snowflake Certified
(except OEM sizes)

ROADIAN ATX

ALL-TERRAIN

Designed for durability and all-around grip performance in any road condition with heavy-duty construction and materials. New tread technology provides a better grip as it wears, and sidewall lugs and deep grooves produce outstanding handling and control off-road and on-road. Mount a set on your CUV, SUV, or Light Truck to experience Nexen's unwavering commitment to do it all, and do it well. Dry or wet, muddy and slippery... go where you want in confidence with the Nexen Roadian ATX.



3 PLY

OE FITMENT ON Jeep

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
18788NXX		235/75R15	XL	109	T	4	50	2,271	-	6.5	6.0-8.0	9.3	28.9	12.5	600	A	B	Black	
10488NXX		205/70R16		97	H	4	51	1,609	-	6.0	5.0-7.0	8.2	27.3	12.5	600	A	B	Black	
10483NXX		215/65R16	XL	102	H	4	50	1,874	-	6.5	6.0-7.5	8.7	27.0	12.5	600	A	B	Black	
10525NXX		215/70R16		100	H	4	51	1,764	-	6.5	5.5-7.0	8.7	27.9	12.5	600	A	B	Black	
18783NXX		245/75R16		111	T	4	51	2,403	-	7.0	6.5-8.0	9.8	30.5	12.5	600	A	B	Black	
18785NXX		265/70R16		112	T	4	51	2,469	-	8.0	7.0-9.0	10.7	30.6	12.5	600	A	B	Black	
18784NXX		265/75R16		116	T	4	51	2,756	-	7.5	7.0-9.0	10.5	31.7	12.5	600	A	B	Black	
10620NXX		215/60R17		96	H	4	51	1,565	-	6.5	6.0-7.5	8.7	27.2	12.5	600	A	B	Black	
10446NXX		215/65R17	XL	103	H	4	50	1,929	-	6.5	6.0-7.5	8.7	28.0	12.5	600	A	B	Black	
10448NXX		225/55R17	XL	101	V	4	50	1,819	-	7.0	6.0-8.0	9.2	26.8	12.5	600	A	B	Black	
10456NXX		225/60R17		99	V	4	51	1,709	-	6.5	6.0-8.0	9.0	27.6	12.5	600	A	B	Black	
10459NXX		225/65R17		102	H	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	12.5	600	A	B	Black	
10487NXX		235/65R17		104	H	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	12.5	600	A	B	Black	
18771NXX		235/75R17		109	T	4	51	2,271	-	6.5	6.0-8.0	9.3	30.9	12.5	600	A	B	Black	
18776NXX		245/65R17	XL	111	T	4	50	2,403	-	7.0	7.0-8.5	9.8	29.5	12.5	600	A	B	Black	
18764NXX		245/70R17		110	T	4	51	2,337	-	7.0	6.5-8.0	9.8	30.6	12.5	600	A	B	Black	

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
9



COMFORT
7



FUEL EFFICIENCY
8



OFF ROAD
9



WEAR LIFE
9



3 Peak Mountain Snowflake Certified
(except OEM & flotation sizes)

ROADIAN ATX

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.		
11702NXX		245/75R17		112	S	4	51	2,469	-	7.0	6.5-7.5	9.8	31.5	11.5	560	A	A	Black	Jeep
18768NXX		255/65R17		110	T	4	51	2,337	-	7.5	7.0-9.0	10.2	30.1	12.5	600	A	B	Black	
18769NXX		255/70R17		112	T	4	51	2,469	-	7.5	6.5-8.5	10.2	31.1	12.5	600	A	B	Black	
18763NXX		255/75R17		115	T	4	51	2,679	-	7.0	6.5-8.5	10.0	32.0	12.5	600	A	B	Black	
18765NXX		265/65R17	XL	116	T	4	50	2,756	-	8.0	7.5-9.5	10.7	30.6	12.5	600	A	B	Black	
17609NXX		265/70R17		115	T	4	51	2,679	-	8.0	7.0-9.0	10.7	31.7	12.5	600	A	B	Black	
18760NXX	P	285/70R17		117	T	4	51	2,833	-	8.5	7.5-9.5	11.5	32.8	12.5	600	A	B	Black	
10494NXX		225/55R18		98	V	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	12.5	600	A	B	Black	
10490NXX		225/60R18	XL	104	H	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	12.5	600	A	B	Black	
10486NXX		235/60R18	XL	107	V	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	12.5	600	A	B	Black	
10571NXX		235/65R18		106	V	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	12.5	600	A	B	Black	
10484NXX		245/60R18		105	V	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	12.5	600	A	B	Black	
18757NXX		255/70R18		113	T	4	51	2,535	-	7.5	6.5-8.5	10.2	32.1	12.5	600	A	B	Black	
18756NXX		265/60R18		110	T	4	51	2,337	-	8.0	7.5-9.5	10.7	30.5	12.5	600	A	B	Black	
18755NXX		265/65R18		114	T	4	51	2,601	-	8.0	7.5-9.5	10.7	31.5	12.5	600	A	B	Black	
18750NXX		265/70R18		116	T	4	51	2,756	-	8.0	7.0-9.0	10.7	32.6	12.5	600	A	B	Black	
NEW 18041NXX		265/70R18		116	T	4	51	2,756	-	8.0	7.0-9.0	10.7	32.6	11.5	580	A	B	Black	Jeep
18748NXX		275/65R18		116	T	4	51	2,756	-	8.0	7.5-9.5	11.0	32.1	12.5	600	A	B	Black	
10557NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	12.5	600	A	B	Black	
18732NXX		245/60R20		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	31.6	12.5	600	A	B	Black	
10555NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	12.5	600	A	B	Black	
10543NXX		255/55R20	XL	110	V	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	12.5	600	A	B	Black	
18747NXX		265/50R20	XL	111	T	4	50	2,403	-	8.5	7.5-9.5	10.9	30.5	12.5	600	A	B	Black	
NEW 19193NXX		265/60R20		112	H	4	51	2,469	-	8.0	7.5-9.5	10.7	32.5	12.5	600	A	B	Black	
18730NXX		275/55R20	XL	117	T	4	50	2,833	-	8.5	7.5-9.5	11.2	31.9	12.5	600	A	B	Black	
18736NXX		275/60R20		115	T	4	51	2,679	-	8.0	7.5-9.5	11.0	33.0	12.5	600	A	B	Black	
18737NXX		275/50R22		111	H	4	51	2,403	-	8.5	7.5-9.5	11.2	32.9	12.5	600	A	B	Black	
18735NXX		285/45R22	XL	114	H	4	50	2,601	-	9.5	9.0-10.5	11.2	32.1	12.0	600	A	B	Black	
18746NXX		305/45R22	XL	118	H	4	50	2,910	-	10.0	9.5-11.5	11.9	32.8	12.0	600	A	B	Black	
12500NXX	LT	235/75R15		104/101	S	6	50	1,985	1,820	6.5	6.0-8.0	9.3	28.9	16.0	-	-	-	Black	
* 18777NXX	LT	225/75R16		115/112	S	10	80	2,680	2,470	6.0	6.0-7.5	8.8	29.3	16.0	-	-	-	Black	
* 18786NXX	LT	235/85R16		120/116	S	10	80	3,042	2,778	6.5	6.5-7.5	9.3	31.7	16.0	-	-	-	Black	
* 18782NXX	LT	245/75R16		120/116	S	10	80	3,042	2,778	7.0	6.5-8.0	9.8	30.5	16.0	-	-	-	Black	
* 18780NXX	LT	265/70R16		121/118	S	10	80	3,195	2,910	8.0	7.0-9.0	10.7	30.6	16.0	-	-	-	Black	
* 18789NXX	LT	265/75R16		123/120	S	10	80	3,415	3,085	7.5	7.0-9.0	10.5	31.7	16.0	-	-	-	Black	
* 18790NXX	LT	285/75R16		126/123	S	10	80	3,750	3,415	8.0	7.5-9.5	11.3	32.8	16.0	-	-	-	Black	
* 18774NXX	LT	235/80R17		120/117	S	10	80	3,085	2,835	6.5	6.0-8.0	9.3	31.8	16.0	-	-	-	Black	
* 18762NXX	LT	245/70R17		119/116	S	10	80	3,000	2,755	7.0	6.5-8.0	9.8	30.6	16.0	-	-	-	Black	
* 18770NXX	LT	245/75R17		121/118	S	10	80	3,195	2,910	7.0	6.5-8.0	9.8	31.5	16.0	-	-	-	Black	
11700NXX	LT	255/75R17		111/108	Q	6	50	2,405	2,205	7.0	6.5-8.5	10.0	32.3	15.0	-	-	-	Black	Jeep
* 14259NXX	LT	265/65R17		120/117	T	10	80	3,085	2,835	8.0	7.5-9.5	10.7	30.6	16.0	-	-	-	Black	
* 18773NXX	LT	265/70R17		123/120	S	10	80	3,415	3,085	8.0	7.0-9.0	10.7	31.7	16.0	-	-	-	Black	
* 18775NXX	LT	275/70R17		124/121	S	10	80	3,525	3,195	8.0	7.0-9.0	11.0	32.2	16.0	-	-	-	Black	
* 18767NXX	LT	285/70R17		126/123	S	10	80	3,750	3,415	8.5	7.0-9.5	11.5	32.8	16.0	-	-	-	Black	
* 18772NXX	LT	285/75R17		128/125	S	10	80	3,970	3,640	8.0	7.5-9.5	11.3	33.9	16.0	-	-	-	Black	
* 18766NXX	LT	315/70R17		126/123	S	10	65	3,750	3,415	9.5	8.0-10.5	12.7	34.4	16.0	-	-	-	Black	
* 18758NXX	LT	265/65R18		122/119	S	10	80	3,305	3,000	8.0	8.0-9.5	10.7	31.5	16.0	-	-	-	Black	
* 18752NXX	LT	265/70R18		124/121	S	10	80	3,525	3,195	8.0	7.0-9.0	10.7	32.6	16.0	-	-	-	Black	
* 18751NXX	LT	275/65R18		123/120	S	10	80	3,415	3,085	8.0	8.0-9.5	11.0	32.1	16.0	-	-	-	Black	
* 18390NXX	LT	275/70R18		125/122	S	10													

ROADIAN ATX

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.		
* 18754NXX	LT	295/70R18		129/126	S	10	80	4,080	3,750	8.5	7.5-10.0	11.8	34.3	16.0	-	-	-	Black	
* 18738NXX	LT	265/60R20		121/118	S	10	80	3,195	2,910	8.0	8.0-9.5	10.7	32.5	16.0	-	-	-	Black	
* 18745NXX	LT	275/55R20		120/117	S	10	80	3,085	2,835	8.5	8.0-9.5	11.2	31.9	16.0	-	-	-	Black	
* 18734NXX	LT	275/60R20		123/120	S	10	80	3,415	3,085	8.0	8.0-9.5	11.0	33.0	16.0	-	-	-	Black	
* 18740NXX	LT	275/65R20		126/123	S	10	80	3,750	3,415	8.0	8.0-9.5	11.0	34.1	16.0	-	-	-	Black	
* 18739NXX	LT	285/55R20		122/119	S	10	80	3,305	3,000	9.0	8.5-10.5	11.7	32.4	16.0	-	-	-	Black	
* 18743NXX	LT	285/60R20		125/122	S	10	80	3,640	3,305	8.5	8.5-10.0	11.5	33.5	16.0	-	-	-	Black	
* NEW 19027NXX	LT	285/65R20		127/124	S	10	80	3,860	3,525	8.5	8.5-10.0	11.5	34.6	16.0	-	-	-	Black	
* NEW 19031NXX	LT	295/65R20		129/126	S	10	80	4,080	3,750	8.5	8.5-10.5	11.7	35.1	16.0	-	-	-	Black	
* 18741NXX	LT	305/55R20		125/122	S	12	80	3,640	3,305	9.5	9.0-11.0	12.4	33.2	16.0	-	-	-	Black	
* 18787NXX		30X9.50R15		104	S	6	50	1,985	-	7.5	6.0-8.0	9.4	29.5	16.0	-	-	-	Black	
* 18778NXX		31X10.50R15		109	S	6	50	2,270	-	8.5	7.0-9.0	10.6	30.5	16.0	-	-	-	Black	
* 18781NXX		33X12.50R15		108	S	6	35	2,205	-	10.0	8.0-10.5	12.5	32.5	16.0	-	-	-	Black	
* 18761NXX		35X12.50R17		128	S	12	80	3,970	-	10.0	8.0-10.5	12.5	34.5	16.0	-	-	-	Black	
* ** 19829NXX		37x12.50R17		128	S	10	80	3,970	-	10.0	8.5-11.0	12.5	36.8	16.0	-	-	-	Black	
* 18759NXX		35X12.50R18		128	S	12	80	3,970	-	10.0	8.5-11.0	12.5	34.5	16.0	-	-	-	Black	
* 18733NXX		33X12.50R20		119	S	12	80	3,000	-	10.0	8.5-11.0	12.5	32.5	16.0	-	-	-	Black	
* 18742NXX		35X12.50R20		125	S	12	80	3,640	-	10.0	8.5-11.0	12.5	34.5	16.0	-	-	-	Black	
* 18744NXX		33X12.50R22		114	S	12	80	2,600	-	10.0	8.0-11.0	12.5	32.5	16.0	-	-	-	Black	
* 18731NXX		35X12.50R22		121	S	12	80	3,195	-	10.0	8.5-11.0	12.5	34.5	16.0	-	-	-	Black	

Technical data can be changed without further notice.
For more detailed OE application information, please refer to "Original Equipment 2025" page.
* Xtra Tough
** 2025.2Q

OFFICIAL SPONSOR SINCE 2024



◀ DUAL SIDEWALL OPTIONS

ROADIAN MTX

MUD TERRAIN

The Roadian MTX features an aggressive design that is extremely versatile for on- and off-road driving. Each tire boasts a dual-sidewall design that allows you to customize the look of the tire on your vehicle. The Roadian MTX also features a standard 3-ply design and F-Load weight rating that makes it extremely capable for heavy hauling. With such rugged traits, you wouldn't expect the Roadian MTX to be as quiet as it is on the highway, but thanks to its patented tread block design, the road noise has been minimized.



TOTAL COVERAGE WARRANTY
NEXEN TIRE



TREAD WEAR WARRANTY
N/A



ROAD HAZARD WARRANTY
N/A



ROADSIDE ASSISTANCE
36 MONTHS



FREE TRIAL
45 DAYS OR 500 MILES

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
17450NXX	LT	235/85R16		120/116	Q	10	80	3,042	2,778	6.5	6.0-7.5	9.3	31.7	19.0	-	-	-	Black
15873NXX	LT	265/75R16		123/120	Q	10	80	3,415	3,085	7.5	7.0-8.0	10.5	31.9	19.0	-	-	-	Black
15879NXX	LT	285/75R16		126/123	Q	10	80	3,750	3,415	8.0	7.5-9.0	11.3	33.1	19.0	-	-	-	Black
15883NXX	LT	235/80R17		120/117	Q	10	80	3,085	2,835	6.5	6.0-7.5	9.3	32.0	18.0	-	-	-	Black
15884NXX	LT	245/75R17		121/118	Q	10	80	3,195	2,910	7.0	6.5-7.5	9.8	31.7	18.0	-	-	-	Black
15886NXX	LT	255/75R17		111/108	Q	6	50	2,405	2,205	7.0	6.5-8.5	10.0	32.3	18.0	-	-	-	Black
18937NXX	LT	265/70R17		123/120	Q	10	80	3,415	3,085	8.0	7.0-8.5	10.7	31.9	19.0	-	-	-	Black
18941NXX	LT	285/70R17		126/123	Q	10	80	3,750	3,415	8.5	7.5-9.0	11.5	33.0	19.0	-	-	-	Black
18940NXX	LT	295/70R17		128/125	Q	10	80	3,970	3,640	8.5	7.5-10.0	11.8	33.5	20.0	-	-	-	Black
18944NXX	LT	305/65R17		128/125	Q	12	80	3,970	3,640	9.0	8.5-11.0	12.2	32.8	20.0	-	-	-	Black
18939NXX	LT	315/70R17		128/125	Q	12	80	3,970	3,640	9.5	8.0-11.0	12.7	34.6	20.0	-	-	-	Black
15925NXX	LT	275/65R18		123/120	Q	10	80	3,415	3,085	8.0	7.5-9.0	11.0	32.3	19.0	-	-	-	Black
15897NXX	LT	275/70R18		125/122	Q	10	80	3,640	3,305	8.0	7.0-8.5	11.0	33.4	19.0	-	-	-	Black
15926NXX	LT	285/65R18		125/122	Q	10	80	3,640	3,305	8.5	8.0-10.0	11.5	32.8	19.0	-	-	-	Black
15898NXX	LT	295/70R18		129/126	Q	10	80	4,080	3,750	8.5	7.5-10.0	11.8	34.5	20.0	-	-	-	Black
16400NXX	LT	305/70R18		128/125	Q	12	80	3,970	3,640	9.0	8.5-10.0	12.2	35.1	20.0	-	-	-	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



BRAKING
8



COMFORT
7



FUEL EFFICIENCY
6



OFF ROAD
10



WEAR LIFE
7

ROADIAN MTX

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
15929NXX	LT	275/65R20		126/123	Q	10	80	3,750	3,415	8.0	7.5-9.5	11.0	34.3	19.0	-	-	-	Black
15932NXX	LT	285/55R20		122/119	Q	10	80	3,305	3,000	9.0	8.0-10.0	11.7	32.6	19.0	-	-	-	Black
15933NXX	LT	295/55R20		123/120	Q	10	80	3,415	3,085	9.5	8.0-10.0	12.2	33.0	20.0	-	-	-	Black
15931NXX	LT	295/60R20		126/123	Q	10	80	3,750	3,415	8.5	8.0-10.0	11.8	34.2	20.0	-	-	-	Black
15930NXX	LT	295/65R20		129/126	Q	10	80	4,080	3,750	8.5	8.0-10.0	11.8	35.4	20.0	-	-	-	Black
16271NXX	LT	305/55R20		125/122	Q	12	80	3,640	3,305	9.5	8.5-11.0	12.4	33.5	20.0	-	-	-	Black
15867NXX		33X12.50R15		108	Q	6	35	2,205	-	10.0	8.5-11.0	12.5	32.8	21.0	-	-	-	Black
15871NXX		35X12.50R15		113	Q	6	35	2,535	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
18938NXX		33X12.50R17		124	Q	12	80	3,527	0	10.0	8.5-11.0	12.5	32.8	21.0	-	-	-	Black
18942NXX		35X12.50R17		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
18943NXX		37X12.50R17		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	36.8	21.0	-	-	-	Black
16263NXX		33X12.50R18		122	Q	12	80	3,305	-	10.0	8.5-11.0	12.5	32.8	21.0	-	-	-	Black
16264NXX		35X12.50R18		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
16265NXX		33X12.50R20		119	Q	12	80	3,000	-	10.0	8.5-11.0	12.5	32.8	21.0	-	-	-	Black
16266NXX		35X12.50R20		125	Q	12	80	3,640	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
16267NXX		37X12.50R20		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	36.8	21.0	-	-	-	Black
16401NXX		37X13.50R20		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	36.8	21.0	-	-	-	Black
16268NXX		33X12.50R22		114	Q	12	80	2,600	-	10.0	8.5-11.0	12.5	32.8	19.0	-	-	-	Black
16269NXX		35X12.50R22		121	Q	12	80	3,195	-	10.0	8.5-11.0	12.5	34.8	21.0	-	-	-	Black
16270NXX		37X13.50R22		128	Q	12	80	3,970	-	10.0	8.5-11.0	12.5	36.8	21.0	-	-	-	Black

Technical data can be changed without further notice.

ROADIAN MT

MUD TERRAIN

The Roadian MT incorporates a zig-zag shoulder block design to provide outstanding traction for off-road and wet conditions, and a deep-groove design, which offers enhanced traction in deep mud and gravel. The shoulder-protector design maximizes load and durability, while optimized wide grooves provide excellent water drainage and anti-hydroplaning performance.



TOTAL
COVERAGE
WARRANTY
 Nexen Tire


TREAD WEAR
WARRANTY
N/A


ROAD HAZARD
WARRANTY
N/A


ROADSIDE
ASSISTANCE
36 MONTHS

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
10667NXX	LT	235/75R15		104/101	Q	6	50	1,985	1,820	6.5	6.0-7.0	9.3	28.9	17.0	-	-	-	White
10674NXX		31X10.50R15		109	Q	6	50	2,270	-	8.5	7.0-9.0	10.6	30.5	18.0	-	-	-	White

Technical data can be changed without further notice.

ROADIAN MTX APPROVED FOR:



◀ **DUAL**
SIDEWALL
OPTIONS

PERFORMANCE RATINGS



BRAKING
8



COMFORT
6



FUEL EFFICIENCY
6



OFF ROAD
10



WEAR LIFE
6

ROADIAN CT8 HL

COMMERCIAL VAN/LT

The Roadian CT8 HL delivers heavy-duty performance for commercial vehicles, and it is the original equipment tire of Ram ProMaster.



OE FITMENT ON



Product Code	P/LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall	OE
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.		
15237NXX		185/60R15		94/92	T	6	54	1,477	1,389	5.5	5.5-6.0	7.4	23.7	13.0	-	-	-	Black	
15419NXX		195/75R16		107/105	R	8	69	2,149	2,039	5.5	5.0-6.0	7.7	27.5	13.0	-	-	-	Black	
15409NXX	LT	215/85R16		115/112	R	10	80	2,680	2,470	6.0	5.5-7.0	8.5	30.4	15.0	-	-	-	Black	
13427NXX	LT	225/75R16		115/112	R	10	80	2,680	2,470	6.0	6.0-7.0	8.8	29.3	15.0	-	-	-	Black	Ram
15386NXX		225/75R16		121/120	R	10	83	3,195	3,085	6.0	6.0-7.0	8.8	29.3	15.0	-	-	-	Black	Ram
15241NXX		235/65R16		121/119	R	10	83	3,197	2,998	7.0	6.5-7.5	9.4	28.0	13.0	-	-	-	Black	
15410NXX	LT	235/85R16		120/116	R	10	80	3,042	2,778	6.5	6.0-7.5	9.3	31.7	15.0	-	-	-	Black	
15411NXX	LT	245/75R16		120/116	S	10	80	3,042	2,778	7.0	6.5-7.5	9.8	30.5	15.0	-	-	-	Black	
15412NXX	LT	265/75R16		123/120	R	10	80	3,415	3,085	7.5	7.0-8.0	10.5	31.7	15.0	-	-	-	Black	
15413NXX	LT	235/80R17		120/117	R	10	80	3,085	2,835	6.5	6.0-7.5	9.3	31.8	15.0	-	-	-	Black	
15414NXX	LT	245/70R17		119/116	R	10	80	3,000	2,755	7.0	6.5-8.0	9.8	30.6	15.0	-	-	-	Black	
15415NXX	LT	245/75R17		121/118	S	10	80	3,195	2,910	7.0	6.5-7.5	9.8	31.5	15.0	-	-	-	Black	
15416NXX	LT	265/70R17		121/118	R	10	80	3,195	2,910	8.0	7.0-8.5	10.7	31.7	15.0	-	-	-	Black	
15418NXX	LT	275/70R18		125/122	R	10	80	3,640	3,305	8.0	7.0-8.5	11.0	33.2	15.0	-	-	-	Black	

Technical data can be changed without further notice. For more detailed OE application information, please refer to "Original Equipment 2025" page.

PERFORMANCE RATINGS



ROADIAN CT8

COMMERCIAL VAN/LT

The Roadian CT8 maintains optimal rigidity balance by including a half-depth transverse groove in the center block. Also, square-shaped dimples in the tread prevent stress, resulting in improved durability and tread life.



Product Code	P/LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
14502NXX		185R14		102/100	T	8	65	1,874	1,764	5.0	5.0-6.0	7.4	25.6	10.5	-	-	-	Black

Technical data can be changed without further notice.



TIRE PARTNER SINCE 2023

PERFORMANCE RATINGS



WINGUARD Sport 2

PERFORMANCE STUDLESS WINTER

The Winguard Sport 2 raises winter driving and high-grip performance to the next level. Its high-density multi-sipe elevates grip for braking on icy and snowy roads, simultaneously increasing longevity. Snowy or dry traction and cornering are improved with the directional tread. Large, wide grooves effectively drain water for anti-hydroplaning performance.



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
16301NXX		195/65R15		91	H	4	51	1,356	-	6.0	5.5-7.0	7.9	25.0	10.5	-	-	-	Black
16302NXX		205/55R16		91	H	4	51	1,356	-	6.5	5.5-7.5	8.4	24.9	10.5	-	-	-	Black
10394NXX		205/65R16		95	H	4	51	1,521	-	6.0	5.5-7.5	8.2	26.5	10.5	-	-	-	Black
16648NXX		215/55R16	XL	97	V	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	10.5	-	-	-	Black
15914NXX		215/65R16		98	H	4	51	1,653	-	6.5	6.0-7.5	8.7	27.0	10.5	-	-	-	Black
17742NXX		225/60R16	XL	102	V	4	50	1,874	-	6.5	6.0-8.0	9.0	26.6	10.5	-	-	-	Black
15440NXX		205/40R17	XL	84	V	4	50	1,102	-	7.5	7.0-8.0	8.3	23.5	10.5	-	-	-	Black
15447NXX		205/45R17	XL	88	V	4	50	1,235	-	7.0	6.5-7.5	8.1	24.3	10.5	-	-	-	Black
15481NXX		205/50R17	XL	93	V	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	10.5	-	-	-	Black
17739NXX		205/55R17	XL	95	V	4	50	1,521	-	6.5	5.5-7.5	8.4	25.9	10.5	-	-	-	Black
15441NXX		215/40R17	XL	87	V	4	50	1,201	-	7.5	7.0-8.5	8.6	23.8	10.5	-	-	-	Black
15448NXX		215/45R17	XL	91	V	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	10.5	-	-	-	Black
15482NXX		215/50R17	XL	95	V	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	10.5	-	-	-	Black
15487NXX		215/55R17	XL	98	V	4	50	1,653	-	7.0	6.0-7.5	8.9	26.3	10.5	-	-	-	Black
15903NXX		215/60R17		96	H	4	51	1,565	-	6.5	6.0-7.5	8.7	27.2	10.5	-	-	-	Black
15450NXX		225/45R17	XL	94	V	4	50	1,477	-	7.5	7.0-8.5	8.9	25.0	10.5	-	-	-	Black
15483NXX		225/50R17	XL	98	V	4	50	1,653	-	7.0	6.0-8.0	9.2	25.9	10.5	-	-	-	Black
15488NXX		225/55R17	XL	101	V	4	50	1,819	-	7.0	6.0-8.0	9.2	26.8	10.5	-	-	-	Black
15905NXX		225/60R17	XL	103	H	4	50	1,929	-	6.5	6.0-8.0	9.0	27.6	10.5	-	-	-	Black
15917NXX		225/65R17		102	H	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	10.5	-	-	-	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS



WINGUARD Sport 2

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
15476NXX		235/45R17	XL	97	V	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	10.5	-	-	-	Black
15490NXX		235/55R17	XL	103	V	4	50	1,929	-	7.5	6.5-8.5	9.6	27.2	10.5	-	-	-	Black
15908NXX		235/60R17	XL	106	H	4	50	2,094	-	7.0	6.5-8.5	9.4	28.1	10.5	-	-	-	Black
15856NXX		235/65R17	XL	108	V	4	50	2,205	-	7.0	6.5-8.5	9.4	29.1	10.5	-	-	-	Black
15479NXX		245/45R17	XL	99	V	4	50	1,709	-	8.0	7.5-9.0	9.6	25.7	10.5	-	-	-	Black
15919NXX		245/65R17		107	H	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	10.5	-	-	-	Black
15920NXX		265/65R17		112	H	4	51	2,469	-	8.0	7.5-9.5	10.7	30.6	10.5	-	-	-	Black
16016NXX		215/40R18	XL	89	V	4	50	1,279	-	7.5	7.0-8.5	8.6	24.8	10.5	-	-	-	Black
16649NXX		215/45R18	XL	93	W	4	50	1,433	-	7.0	7.0-8.0	8.4	25.6	10.5	-	-	-	Black
11536NXX		215/55R18	XL	99	V	4	50	1,709	-	7.0	6.0-7.5	8.9	27.3	10.5	-	-	-	Black
15442NXX		225/40R18	XL	92	V	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	10.5	-	-	-	Black
15475NXX		225/45R18	XL	95	V	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	10.5	-	-	-	Black
15484NXX		225/50R18	XL	99	H	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	10.5	-	-	-	Black
15901NXX		225/55R18	XL	102	V	4	50	1,874	-	7.0	6.0-8.0	9.2	27.8	10.5	-	-	-	Black
15910NXX		225/60R18	XL	104	V	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	10.5	-	-	-	Black
15443NXX		235/40R18	XL	95	W	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	10.5	-	-	-	Black
15477NXX		235/45R18	XL	98	V	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	10.5	-	-	-	Black
16024NXX		235/50R18	XL	101	V	4	50	1,819	-	7.5	6.5-8.5	9.6	27.3	10.5	-	-	-	Black
15902NXX		235/55R18	XL	104	H	4	50	1,984	-	7.5	6.5-8.5	9.6	28.1	10.5	-	-	-	Black
15911NXX		235/60R18	XL	107	H	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	10.5	-	-	-	Black
15445NXX		245/40R18	XL	97	W	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	10.5	-	-	-	Black
15480NXX		245/45R18	XL	100	V	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	10.5	-	-	-	Black
15485NXX		245/50R18	XL	104	V	4	50	1,984	-	7.5	7.0-8.5	10.0	27.7	10.5	-	-	-	Black
10390NXX		245/60R18		105	H	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	10.5	-	-	-	Black
16015NXX		255/35R18	XL	94	V	4	50	1,477	-	9.0	8.5-10.0	10.2	25.0	10.5	-	-	-	Black
15446NXX		255/40R18	XL	99	V	4	50	1,709	-	9.0	8.5-10.0	10.2	26.0	10.5	-	-	-	Black
16022NXX		255/45R18	XL	103	V	4	50	1,929	-	8.5	8.0-9.5	10.0	27.0	10.5	-	-	-	Black
15854NXX		255/55R18	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	29.0	10.5	-	-	-	Black
15913NXX		255/60R18	XL	112	H	4	50	2,469	-	7.5	7.0-9.0	10.2	30.0	10.5	-	-	-	Black
18100NXX		265/60R18	XL	114	H	4	50	2,601	-	8.0	7.5-9.5	10.7	30.5	10.0	-	-	-	Black
17730NXX		275/40R18	XL	103	V	4	50	1,929	-	9.5	9.0-11.0	10.9	26.7	10.5	-	-	-	Black
17736NXX		275/45R18	XL	107	V	4	50	2,149	-	9.0	8.5-10.5	10.7	27.8	10.5	-	-	-	Black
17738NXX		225/40R19	XL	93	V	4	50	1,433	-	8.0	7.5-9.0	9.1	26.1	10.5	-	-	-	Black
11456NXX		225/45R19	XL	96	V	4	50	1,565	-	7.5	7.0-8.5	8.9	27.0	10.5	-	-	-	Black
14893NXX		225/55R19		99	H	4	51	1,709	-	7.0	6.0-8.0	9.2	28.8	10.5	-	-	-	Black
15438NXX		235/35R19	XL	91	W	4	50	1,356	-	8.5	8.0-9.5	9.5	25.5	10.5	-	-	-	Black
15478NXX		235/45R19	XL	99	V	4	50	1,709	-	8.0	7.5-9.0	9.3	27.4	10.5	-	-	-	Black
14901NXX		235/50R19		99	V	4	51	1,709	-	7.5	6.5-8.5	9.6	28.3	10.5	-	-	-	Black
16025NXX		235/55R19	XL	105	V	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	10.5	-	-	-	Black
17588NXX		245/35R19	XL	93	W	4	50	1,433	-	8.5	8.0-9.5	9.8	25.8	10.0	-	-	-	Black
16018NXX		245/40R19	XL	98	V	4	50	1,653	-	8.5	8.0-9.5	9.8	26.7	10.5	-	-	-	Black
16023NXX		245/45R19	XL	102	V	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	10.5	-	-	-	Black
15439NXX		255/35R19	XL	96	V	4	50	1,565	-	9.0	8.5-10.0	10.2	26.0	10.5	-	-	-	Black
16019NXX		255/40R19	XL	100	V	4	50	1,764	-	9.0	8.5-10.0	10.2	27.0	10.5	-	-	-	Black
17735NXX		255/45R19	XL	104	V	4	50	1,984	-	8.5	8.0-9.5	10.0	28.1	10.5	-	-	-	Black
15900NXX		255/50R19	XL	107	V	4	50	2,149	-	8.0	7.0-9.0	10.4	29.1	10.5	-	-	-	Black
17592NXX		265/35R19	XL	98	W	4	50	1,653	-	9.5	9.0-10.5	10.7	26.3	10.0	-	-	-	Black
16650NXX		275/35R19	XL	100	W	4	50	1,764	-	9.5	9.0-11.0	10.9	26.6	10.5	-	-	-	Black
16020NXX		275/40R19	XL	105	V	4	50	2,039	-	9.5	9.0-11.0	10.9	27.7	10.5	-	-	-	Black

CONTINUED ON NEXT PAGE...

WINGUARD Sport 2

CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Measuring	Approved				Tread-wear	Trac.	Temp.	
14896NXX		245/35R20		91	W	4	51	1,356	-	8.5	8.0-9.5	9.8	26.8	10.5	-	-	-	Black
18067NXX		245/40R20	XL	99	W	4	50	1,709	-	8.5	8.0-9.5	9.8	27.7	10.5	-	-	-	Black
17737NXX		245/45R20	XL	103	V	4	50	1,929	-	8.0	7.5-9.0	9.6	28.7	10.5	-	-	-	Black
18103NXX		245/50R20		102	V	4	51	1,874	-	7.5	7.0-8.5	10.0	29.7	10.0	-	-	-	Black
10392NXX		255/45R20	XL	105	V	4	50	2,039	-	8.5	8.0-9.5	10.0	29.1	10.5	-	-	-	Black
18102NXX		255/50R20	XL	109	V	4	50	2,271	-	8.0	7.0-9.0	10.4	30.1	10.0	-	-	-	Black
17733NXX		265/35R20	XL	99	V	4	50	1,709	-	9.5	9.0-10.5	10.7	27.3	10.0	-	-	-	Black
14861NXX		275/30R20		93	W	4	51	1,433	-	9.5	9.0-10.0	10.9	26.5	10.0	-	-	-	Black
17593NXX		275/35R20	XL	102	W	4	50	1,874	-	9.5	9.0-11.0	10.9	27.6	10.0	-	-	-	Black
16021NXX		275/40R20	XL	106	W	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	10.5	-	-	-	Black
18104NXX		275/45R20	XL	110	V	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	10.0	-	-	-	Black
16021NXX		275/40R20	XL	106	W	4	50	2,094	-	9.5	9.0-11.0	10.9	28.7	10.5	-	-	-	Black
18104NXX		275/45R20	XL	110	V	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	10.0	-	-	-	Black

Technical data can be changed without further notice.



OFFICIAL TIRE OF THE ANAHEIM DUCKS SINCE 2021

"Nexen Tire is extremely excited to be a part of a championship NHL franchise like the Anaheim Ducks and their premier arena, the Honda Center... This partnership will help to elevate the Nexen Tire brand among more than a million NHL fans across Southern California, and when these fans enter the Honda Center arena during a Ducks game or other premier events, they'll know Nexen Tire has their back."

- Brian YoonSeok Han, CEO of Nexen Tire America, Inc.

WINGUARD winSpike3



STUDDABLE WINTER

The Winguard Winspike 3 tires are molded to allow for stud installation that provides better traction on ice and snow. It was developed for the drivers of sedans, crossovers, and SUVs looking for sure-footed performance and traditional wintertime traction on dry, wet, and snow-covered roads.



Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
18398NXX		175/70R13		82	T	4	51	1,047	-	5.0	4.5-6.0	7.0	22.7	11.0	-	-	-	Black
18402NXX		175/65R14	XL	86	T	4	50	1,168	-	5.0	5.0-6.0	7.0	23.0	11.0	-	-	-	Black
18399NXX		175/70R14		84	T	4	51	1,102	-	5.0	4.5-6.0	7.0	23.7	11.0	-	-	-	Black
18410NXX		185/60R14		82	T	4	51	1,047	-	5.5	5.0-6.5	7.4	22.8	11.0	-	-	-	Black
18404NXX		185/65R14	XL	90	T	4	50	1,323	-	5.5	5.0-6.5	7.4	23.5	11.0	-	-	-	Black
18414NXX		185/70R14	XL	92	T	4	50	1,389	-	5.5	4.5-6.0	7.4	24.3	11.0	-	-	-	Black
18412NXX		195/70R14		91	T	4	51	1,356	-	6.0	5.0-6.5	7.9	24.8	11.0	-	-	-	Black
18400NXX		175/65R15	XL	88	T	4	50	1,235	-	5.0	5.0-6.0	7.0	24.0	11.0	-	-	-	Black
18401NXX		185/55R15	XL	86	T	4	50	1,168	-	6.0	5.0-6.5	7.6	23.0	11.0	-	-	-	Black
18409NXX		185/60R15	XL	88	T	4	50	1,235	-	5.5	5.0-6.5	7.4	23.7	11.0	-	-	-	Black
17630NXX		185/65R15	XL	92	T	4	50	1,389	-	5.5	5.0-6.5	7.4	24.4	11.0	-	-	-	Black
18406NXX		195/55R15	XL	89	T	4	50	1,279	-	6.0	5.5-7.0	7.9	23.4	11.0	-	-	-	Black
18397NXX		195/60R15	XL	92	T	4	50	1,389	-	6.0	5.5-7.0	7.9	24.2	11.0	-	-	-	Black
17629NXX		195/65R15	XL	95	T	4	50	1,521	-	6.0	5.5-7.0	7.9	25.0	11.0	-	-	-	Black
18411NXX		205/65R15	XL	99	T	4	50	1,709	-	6.0	5.5-7.5	8.2	25.5	11.0	-	-	-	Black
17633NXX		205/70R15		96	T	4	51	1,565	-	6.0	5.0-7.0	8.2	26.3	11.0	-	-	-	Black
18474NXX		215/70R15		98	T	4	51	1,653	-	6.5	5.5-7.0	8.7	26.9	11.0	-	-	-	Black
10896NXX		235/75R15	XL	109	T	4	50	2,271	-	6.5	6.0-8.0	9.3	28.9	11.0	-	-	-	Black

CONTINUED ON NEXT PAGE...

PERFORMANCE RATINGS





CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
17628NXX	205/55R16	XL	94	T	4	50	1,477	-	6.5	5.5-7.5	8.4	24.9	11.0	-	-	-	Black	
17634NXX	205/60R16	XL	96	T	4	50	1,565	-	6.0	5.5-7.5	8.2	25.7	11.0	-	-	-	Black	
17631NXX	205/65R16		95	T	4	51	1,521	-	6.0	5.5-7.5	8.2	26.5	11.0	-	-	-	Black	
18413NXX	215/55R16	XL	97	T	4	50	1,609	-	7.0	6.0-7.5	8.9	25.3	11.0	-	-	-	Black	
17636NXX	215/60R16	XL	99	T	4	50	1,709	-	6.5	6.0-7.5	8.7	26.1	11.0	-	-	-	Black	
18432NXX	215/65R16	XL	102	T	4	50	1,874	-	6.5	6.0-7.5	8.7	27.0	11.0	-	-	-	Black	
11248NXX	215/70R16		100	T	4	51	1,764	-	6.5	5.5-7.0	8.7	27.9	11.0	-	-	-	Black	
11116NXX	225/60R16		98	T	4	51	1,653	-	6.5	6.0-8.0	9.0	26.6	11.0	-	-	-	Black	
11184NXX	225/70R16	XL	107	T	4	50	2,149	-	6.5	6.0-7.5	9.0	28.4	11.0	-	-	-	Black	
10668NXX	235/70R16		106	T	4	51	2,094	-	7.0	6.0-8.0	9.4	29.0	11.0	-	-	-	Black	
11245NXX	245/70R16		107	T	4	51	2,149	-	7.0	6.5-8.0	9.8	29.5	11.0	-	-	-	Black	
10870NXX	245/75R16		111	T	4	51	2,403	-	7.0	6.5-8.0	9.8	30.5	11.0	-	-	-	Black	
10799NXX	265/70R16		112	T	4	51	2,469	-	8.0	7.0-9.0	10.7	30.6	11.0	-	-	-	Black	
10794NXX	265/75R16		116	T	4	51	2,756	-	7.5	7.0-9.0	10.5	31.7	11.0	-	-	-	Black	
18422NXX	205/50R17	XL	93	T	4	50	1,433	-	6.5	5.5-7.5	8.4	25.1	11.0	-	-	-	Black	
18423NXX	215/45R17	XL	91	T	4	50	1,356	-	7.0	7.0-8.0	8.4	24.6	11.0	-	-	-	Black	
18417NXX	215/50R17	XL	95	T	4	50	1,521	-	7.0	6.0-7.5	8.9	25.5	11.0	-	-	-	Black	
17632NXX	215/55R17	XL	98	T	4	50	1,653	-	7.0	6.0-7.5	8.9	26.3	11.0	-	-	-	Black	
18421NXX	215/60R17	XL	100	T	4	50	1,764	-	6.5	6.0-7.5	8.7	27.2	11.0	-	-	-	Black	
11013NXX	215/65R17		99	T	4	51	1,709	-	6.5	6.0-7.5	8.7	28.0	11.0	-	-	-	Black	
18425NXX	225/45R17		91	T	4	51	1,356	-	7.5	7.0-8.5	8.9	25.0	11.0	-	-	-	Black	
17635NXX	225/50R17	XL	98	T	4	50	1,653	-	7.0	6.0-8.0	9.2	25.9	11.0	-	-	-	Black	
18420NXX	225/55R17	XL	101	T	4	50	1,819	-	7.0	6.0-8.0	9.2	26.8	11.0	-	-	-	Black	
10910NXX	225/60R17		99	T	4	51	1,709	-	6.5	6.0-8.0	9.0	27.6	11.0	-	-	-	Black	
10826NXX	225/65R17		102	T	4	51	1,874	-	6.5	6.0-8.0	9.0	28.5	11.0	-	-	-	Black	
18424NXX	235/45R17	XL	97	T	4	50	1,609	-	8.0	7.5-9.0	9.3	25.4	11.0	-	-	-	Black	
18431NXX	235/55R17	XL	103	T	4	50	1,929	-	7.5	6.5-8.5	9.6	27.2	11.0	-	-	-	Black	
11229NXX	235/60R17		102	T	4	51	1,874	-	7.0	6.5-8.5	9.4	28.1	11.0	-	-	-	Black	
10886NXX	235/65R17		104	T	4	51	1,984	-	7.0	6.5-8.5	9.4	29.1	11.0	-	-	-	Black	
18426NXX	245/45R17	XL	99	T	4	50	1,709	-	8.0	7.5-9.0	9.6	25.7	11.0	-	-	-	Black	
10914NXX	245/65R17		107	T	4	51	2,149	-	7.0	7.0-8.5	9.8	29.5	11.0	-	-	-	Black	
10919NXX	245/70R17		110	T	4	51	2,337	-	7.0	6.5-8.0	9.8	30.6	11.0	-	-	-	Black	
11183NXX	265/65R17	XL	116	T	4	50	2,756	-	8.0	7.5-9.5	10.7	30.6	11.0	-	-	-	Black	
10905NXX	265/70R17		115	T	4	51	2,679	-	8.0	7.0-9.0	10.7	31.7	11.0	-	-	-	Black	
11606NXX	215/55R18		95	T	4	51	1,521	-	7.0	6.0-7.5	8.9	27.3	11.0	-	-	-	Black	
18427NXX	225/40R18	XL	92	T	4	50	1,389	-	8.0	7.5-9.0	9.1	25.1	11.0	-	-	-	Black	
18429NXX	225/45R18	XL	95	T	4	50	1,521	-	7.5	7.0-8.5	8.9	25.9	11.0	-	-	-	Black	
11241NXX	225/50R18	XL	99	T	4	50	1,709	-	7.0	6.0-8.0	9.2	26.9	11.0	-	-	-	Black	
10888NXX	225/55R18		98	T	4	51	1,653	-	7.0	6.0-8.0	9.2	27.8	11.0	-	-	-	Black	
11061NXX	225/60R18	XL	104	T	4	50	1,984	-	6.5	6.0-8.0	9.0	28.6	11.0	-	-	-	Black	
18419NXX	235/40R18	XL	95	T	4	50	1,521	-	8.5	8.0-9.5	9.5	25.4	11.0	-	-	-	Black	
18418NXX	235/45R18	XL	98	T	4	50	1,653	-	8.0	7.5-9.0	9.3	26.3	11.0	-	-	-	Black	
18415NXX	235/50R18	XL	101	T	4	50	1,819	-	7.5	6.5-8.5	9.6	27.3	11.0	-	-	-	Black	
11012NXX	235/55R18		100	T	4	51	1,764	-	7.5	6.5-8.5	9.6	28.1	11.0	-	-	-	Black	
10688NXX	235/60R18	XL	107	T	4	50	2,149	-	7.0	6.5-8.5	9.4	29.1	11.0	-	-	-	Black	
10629NXX	235/65R18		106	T	4	51	2,094	-	7.0	6.5-8.5	9.4	30.0	11.0	-	-	-	Black	
18416NXX	245/40R18	XL	97	T	4	50	1,609	-	8.5	8.0-9.5	9.8	25.7	11.0	-	-	-	Black	
18430NXX	245/45R18	XL	100	T	4	50	1,764	-	8.0	7.5-9.0	9.6	26.7	11.0	-	-	-	Black	
18428NXX	245/50R18	XL	104	T	4	50	1,984	-	7.5	7.0-8.5	10.0	27.7	11.0	-	-	-	Black	
11095NXX	245/60R18		105	T	4	51	2,039	-	7.0	7.0-8.5	9.8	29.6	11.0	-	-	-	Black	
11285NXX	255/55R18	XL	109	T	4	50	2,271	-	8.0	7.0-9.0	10.4	29.0	11.0	-	-	-	Black	

CONTINUED ON NEXT PAGE...



CONTINUED FROM PREVIOUS PAGE

Product Code	P/ LT	Size	XL	LI	SR	PLY	Max Air (psi)	Max Load (lbs)		Rim		Section Width (inch)	Overall Diameter (inch)	Tread Depth (/32")	UTQG			Sidewall
								S	D	Meas.	Approved				Tread-wear	Trac.	Temp.	
10989NXX	255/65R18		111	T	4	51	2,403	-	7.5	7.0-9.0	10.2	31.1	11.0	-	-	-	Black	
11233NXX	265/60R18	XL	114	T	4	50	2,601	-	8.0	7.5-9.5	10.7	30.5	11.0	-	-	-	Black	
11011NXX	265/65R18		114	T	4	51	2,601	-	8.0	7.5-9.5	10.7	31.5	11.0	-	-	-	Black	
10670NXX	275/65R18		116	T	4	51	2,756	-	8.0	7.5-9.5	11.0	32.1	11.0	-	-	-	Black	
10796NXX	225/55R19	XL	103	T	4	50	1,929	-	7.0	6.0-8.0	9.2	28.8	11.0	-	-	-	Black	
11124NXX	235/40R19	XL	96	T	4	50	1,565	-	8.5	8.0-9.5	9.5	26.4	11.0	-	-	-	Black	
11071NXX	235/50R19	XL	103	T	4	50	1,929	-	7.5	6.5-8.5	9.6	28.3	11.0	-	-	-	Black	
10953NXX	235/55R19	XL	105	T	4	50	2,039	-	7.5	6.5-8.5	9.6	29.2	11.0	-	-	-	Black	
11243NXX	245/45R19	XL	102	T	4	50	1,874	-	8.0	7.5-9.0	9.6	27.7	11.0	-	-	-	Black	
11247NXX	245/50R19	XL	105	T	4	50	2,039	-	7.5	7.0-8.5	10.0	28.7	11.0	-	-	-	Black	
11096NXX	245/55R19		103	T	4	51	1,929	-	7.5	7.0-8.5	10.0	29.6	11.0	-	-	-	Black	
11244NXX	255/50R19	XL	107	T	4	50	2,149	-	8.0	7.0-9.0	10.4	29.1	11.0	-	-	-	Black	
11231NXX	255/55R19	XL	111	T	4	50	2,403	-	8.0	7.0-9.0	10.4	30.0	11.0	-	-	-	Black	
10828NXX	235/55R20		102	T	4	51	1,874	-	7.5	6.5-8.5	9.6	30.2	11.0	-	-	-	Black	
10894NXX	255/55R20	XL	110	T	4	50	2,337	-	8.0	7.0-9.0	10.4	31.0	11.0	-	-	-	Black	
11127NXX	265/50R20		107	T	4	51	2,149	-	8.5	7.5-9.5	10.9	30.5	11.0	-	-	-	Black	
11249NXX	275/45R20	XL	110	T	4	50	2,337	-	9.0	8.5-10.5	10.7	29.8	11.0	-	-	-	Black	
11234NXX	275/50R20	XL	113	T	4	50	2,535	-	8.5	7.5-9.5	11.2	30.9	11.0	-	-	-	Black	
10887NXX	275/55R20		113	T	4	51	2,535	-	8.5	7.5-9.5	11.2	31.9	11.0	-	-	-	Black	
10897NXX	275/60R20		115	T	4	51	2,679	-	8.0	7.5-9.5	11.0	33.0	11.0	-	-	-	Black	
11235NXX	285/50R20	XL	116	T	4	50	2,756	-	9.0	8.0-10.0	11.7	31.3	11.0	-	-	-	Black	
11062NXX	285/45R22	XL	114	T	4	50	2,601	-	9.5	9.0-10.5	11.2	32.1	11.0	-	-	-	Black	
10903NXX	185/60R15C		94/92	T	6	54	1,477	1,389	5.5	5.5-6.0	7.4	23.7	12.5	-	-	-	Black	
11014NXX	195/75R16C		107/105	R	8	69	2,149	2,039	5.5	5.0-6.0	7.7	27.5	12.5	-	-	-	Black	
10984NXX	225/75R16C		121/120	R	10	83	3,195	3,085	6.0	6.0-7.0	8.8	29.3	12.5	-	-	-	Black	
11089NXX	235/65R16C		121/119	R														

Original Equipment 2025 PATTERNS



Original Equipment 2025

	Brand	Model	Model Year	Product	Product Code	Size	LI/SR	UTQG Wear
		A3	2023-2025	N'FERA AU7	17577NXX	225/45R17	91 H	500 A A
New		X3/X4	2025	N'FERA SPORT	17580NXE	245/50R19	105 Y	300 AA A
New		Mini	2025	N'FERA SPORT	10331NXE	215/45R17	91 Y	280 A A
		All New 200	2015-2017	CP671	13683NXX	215/55R17	94 H	400 A A
13660NXX					235/45R18	94 H	400 A A	
13680NXX					235/40R19	96 H	400 A A	
		Pacifica	2017-2025	N'PRIZ RH7@	14376NXX	235/60R18	103 H	680 A A
		Challenger RT Scat Pack 1320	2020-2023	N'FERA SUR4G	17387NXX	275/40R20	102 Y	100 A A
		Durango	2019-2025	N'PRIZ RH7@	16469NXX	P 245/65R18	110 H	500 A A
		Journey	2019-2021	N'PRIZ RH7	16489NXX	225/65R17	102 H	540 A A
16490NXX					225/55R19	99 H	440 A A	
17589NXX					245/55R18	103 Y	500 AA A	
New		Charger / Charger EV	2025	N'FERA AU7	17590NXX	255/45R20	105 V	500 A A
		500L	2013-2020	CP671	12525NXX	205/55R16	91 H	400 A A
12526NXX					225/45R17	91 V	400 A A	
New		500X	2014-2019	CP671	13536NXX	215/55R17	94 V	400 A A
					13535NXX	215/60R17	96 T	400 A A
		Elantra	2016-2020	N'PRIZ AH8	14386NXX	195/65R15	91 T	500 A A
2012-2017			CP671 H	12842NXX	P 215/45R17	87 H	400 A A	
2016-2020			N'PRIZ AH8	14194NXX	205/55R16	91 H	560 A A	
		Kona	2019-2025	N'PRIZ AH8	15605NXX	205/60R16	92 H	500 A A
2022-2025			N'PRIZ S	17068NXX	215/55R17	94 V	560 A A	
		Kona EV	2019-2025	N'PRIZ AH8	16383NXX	215/55R17	94 V	500 A A
New		Palisade	2025-	N'FERA SUPREME S	19272NXX	235/65R18	106 H	560 A A
	Tucson	2016-2021	N'PRIZ RH7	14179NXX	225/55R18	98 H	540 A A	
2021-2025		ROADIAN GTX	16581NXX	235/65R17	104 H	600 A A		
2025		ROADIAN GTX	10281NXX	235/60R18	103 H	600 A A		
New	Veloster	2012-2017	CP671 H	12842NXX	P 215/45R17	87 H	400 A A	
2018-2020		N'PRIZ AH8	14749NXX	215/45R17	87 H	500 A A		
		14708NXX	225/40R18	88 W	500 A A			
	Venue	2020-2025	N'PRIZ AH8	16094NXX	205/55R17	91 H	500 A A	

CONTINUED ON NEXT PAGE...

Technical data can be changed without further notice.
* Spare Tire

Brand	Model	Model Year	Product	Product Code	Size	LI/SR	UTQG Wear
Jeep	Grand Cherokee	2019-2025	N'PRIZ RH7@	16469NXX	P 245/65R18	110 H	500 A A
	Wagoneer	2022-2025	ROADIAN HTX RH5	15278NXX	275/55R20	113 T	640 A A
	Wrangler	2023-2025	ROADIAN HTX 2	11717NXX	245/75R17	112 S	700 A A
				11696NXX	255/60R20	113 T	700 A A
			ROADIAN ATX	11702NXX	245/75R17	112 S	560 A A
				11700NXX	LT 255/75R17	111/108 Q	—
	Recon BEV	2025	ROADIAN ATX	18041NXX	265/70R18	116 T	580 A B
	Gladiator	2023-2025	ROADIAN HTX 2	11717NXX	245/75R17	112 S	700 A A
				11696NXX	255/60R20	113 T	700 A A
			ROADIAN ATX	11702NXX	245/75R17	112 S	560 A A
11700NXX				LT 255/75R17	111/108 Q	—	
Kia	Carnival	2021-2025	ROADIAN GTX	17136NXX	235/65R17	104 H	600 A A
	Forte	2014-2016	CP671	12841NXX	P 195/65R15	89 T	440 A A
		2017-2019	N'PRIZ AH8	13466NXX	195/65R15	91 T	500 A A
		2014-2018	CP671 H	12842NXX	P 215/45R17	87 H	400 A A
			CP671	16960NXX	P 225/40R18	88 V	400 A A
	Niro	2023-2025	N'PRIZ S	17195NXX	205/60R16	92 H	560 A A
	Niro EV	2023-2025	N'PRIZ S	18382NXX	215/55R17	94 V	560 A A
	Optima	2011-2014	CP671	11449NXX	P 205/65R16	94 H	400 A A
	Optima	2016-2020	N'PRIZ AH8	13904NXX	205/65R16	95 H	440 A A
		2011-2015	CP671	12259NXX	P 215/55R17	93 V	400 A A
		2013-2015	CP662	12261NXX	225/45R18	95 V	440 A A
	Sorento	2015-2020	N'PRIZ RH7	13423NXX	235/60R18	103 H	440 A A
	Sorento HEV	2021-2025	ROADIAN GTX	16581NXX	235/65R17	104 H	600 A A
	Soul	2010-2013	CP662	11073NXX	P 195/65R15	89 S	440 A A
			CP662	11074NXX	P 205/55R16	89 H	440 A A
		2011-2013	CP671	13333NXX	205/60R16	92 H	400 A A
CP671 H			13321NXX	235/45R18	94 V	400 A A	
		13320NXX	215/55R17	94 V	400 A A		
2014-2018		N'PRIZ AH8	15605NXX	205/60R16	92 H	500 A A	
2019-2025		N'PRIZ S	17068NXX	215/55R17	94 V	560 A A	
2022-2025		N'PRIZ S	17068NXX	215/55R17	94 V	560 A A	

New

CONTINUED ON NEXT PAGE...

Technical data can be changed without further notice.
* Spare Tire

Brand	Model	Model Year	Product	Product Code	Size	LI/SR	UTQG Wear
Kia	Soul EV	2015-2020	N'BLUE EV	15705NXX	205/60R16	92 H	400 A A
	Sportage	2011-2013	CP671	11462NXX	215/70R16	100 H	460 A A
		2015-2021	N'PRIZ RH7	14179NXX	225/55R18	98 H	540 A A
		2021-2025	ROADIAN GTX	16581NXX	235/65R17	104 H	600 A A
Mitsubishi Motors	Outlander Sport	2014-2025	N'PRIZ RH7	12817NXX	P 225/55R18	97 H	440 A A
	Outlander	2021-2025	ROADIAN GTX	16640NXX	P 255/45R20	101 W	600 A A
		2025	ROADIAN GTX	17001NXX	P 255/45R20	101 W	600 A A
Ram	1500	2018-2025	ROADIAN HTX RH5	15278NXX	275/55R20	113 T	640 A A
	3500	2014-2025	ROADIAN HTX RH5	14265NXX	LT 235/80R17	120/117 R	—
			ROADIAN AT PRO RA8	14264NXX	LT 235/80R17	120/117 R	—
		2017-2025	ROADIAN AT PRO RA8	10150NXX	LT 275/70R18	125/122 R	—
	ProMaster	2015-2025	ROADIAN CT8 HL	13427NXX	LT 225/75R16	115/112 R	—
		2017-2025	ROADIAN CT8 HL	15386NXX	225/75R16C	121/120 R	—
ProMaster City	2017-2023	N'PRIZ AH8	14369NXX	215/55R16	97 H	440 A A	
VW	Jetta	2019-2025	N'PRIZ AH8	15530NXX	205/55R17	91 H	500 A A
		2022-2025	N'FERA AU7	16643NXX	205/60R16	92 H	500 A A
	16694NXX			205/55R17	91 H	500 A A	
	Passat	2020-2022	N'FERA AU7	16313NXX	215/55R17	94 H	560 A A
	Atlas	2024-2025	ROADIAN GTX	18071NXX	255/50R20	105 T	540 A A
Porsche	Cayenne	2023-2025	N'FERA SPORT SUV	18119NXX	285/45R21	113 Y	300 AA A
				18122NXX	315/40R21	115 Y	300 AA A
	Macan	2019-2025	N'FERA RUI	15697NXX	235/55R19	101 Y	320 AA A
				15698NXX	255/50R19	103 Y	320 AA A
	Panamera	2021-2025	N'FERA SPORT	16391NXX	265/45R19	105 Y	300 AA A
				16392NXX	295/40R19	108 Y	300 AA A
Mercedes	GLE/GLS/GLC	2019-2025	402	16014NXX	T 155/80R19	114 M	—

NEW

Technical data can be changed without further notice.
* Spare Tire

NEXEN TOTAL COVERAGE WARRANTY

1. ABOUT NEXEN TOTAL COVERAGE WARRANTY

This limited warranty only applies to the original purchaser of new replacement tires sold by NEXEN TIRE USA (as below NEXEN TIRE), and tires must have been used on the same vehicle that they were originally installed on.

This warranty applies to tires purchased after January 1, 2025. Tires purchased before January 1, 2025 are subject to the previous published warranty.

The NEXEN Total Coverage Warranty offers the consumer the following benefits:

- Coverage for Defects in Workmanship and Materials
- Mileage Tread Wear Limited Warranty*
- Road Hazard Replacement Program*
- Roadside Assistance - Flat Tire Change or Tow Service
- 45-day Satisfaction Guarantee Trial Warranty

*Most, but not all, NEXEN TIRE patterns come with a Mileage Tread Wear Warranty and/or Road Hazard Replacement. Check each pattern for coverage.

For purposes of this warranty, the term “usable tread life” will be determined as having at least 2/32” (1.6mm) of tread remaining evenly across the tire. If less than 2/32” (1.6mm) of tread remains at any point on the face of the tire, the tire will be considered past its usable tread life and subject to any and all conditions stated below.

Warranty program NOT APPLICABLE to other U.S. territories (Guam, Northern Marianas Islands, American Samoa, Puerto Rico, and U.S. Virgin Islands).

2. WORKMANSHIP AND MATERIALS

All NEXEN tires are warranted against defects in workmanship and material and will be replaced 100% free of charge for the initial warranty period, which is the first 2/32” (1.6mm) of original usable tread life, or within 12 months from the period of purchase, whichever comes first.

After the 100% replacement term expires and the tire is still within 72 months from date of manufacture, the amount of credit will be determined by the percentage of original tread depth remaining on the tire. Under all circumstances, the cost of mounting, balancing, and any other service charges, including applicable taxes, are required to be paid by the consumer.

3. MILEAGE TREAD WEAR LIMITED WARRANTY

Designated patterns manufactured by NEXEN TIRE are assigned a mileage warranty that protects the consumer against premature tread wear. If a tire reaches the end of its “usable tread life” before the stated mileage warranty, the consumer will be issued a replacement NEXEN tire on a pro-rated basis, which means the consumer will be responsible for a percentage of the replacement cost. In order to maintain the tread wear warranty, all tires must be rotated at least every 5,000–6,000 miles (8,000–10,000 km). Under all circumstances, the cost of mounting, balancing, and any other service charges, including applicable taxes, are required to be paid by the consumer.

4. WHAT IS NOT COVERED UNDER THIS LIMITED WARRANTY

This warranty does not cover tires damaged due to misuse, abuse, or accident such as:

- Ride complaints after the first 2/32” of tread wear or first year of purchase, whichever comes first. Replacement of three (3) or more tires from the same vehicle will not be accepted.
- Road hazard damage such as cuts, snags, punctures or tire repair, bruises, impact breaks, etc. (Check Road Hazard Replacement Program for patterns that are covered against this type of damage.)
- Premature or irregular wear (a measured tread difference of 2/32” [1.6mm] or more across the tread on the same tire) due to vehicle mechanical deficiencies or failure to rotate the tires at recommended intervals.
- Tires on any vehicle registered and normally operated outside the United States.
- Damage from incorrect mounting or dismounting of the tire, incorrect application, water or other material trapped inside the tire during mounting, or failure to balance the tires.
- Damage from over/under inflation, overload, or defective vehicle mechanical conditions.
- Tires with a lower load index and/or speed rating than that of the OE tire.
- Racing, off-road use, and misapplication of tire to vehicle.
- Ozone or weather cracking on tires after 48 months from the date of manufacture.
- Minor cosmetic ozone or weather cracking.
- Any tires worn beyond the wear indicators (Less than 2/32” remaining tread depth).
- Flat spotting caused by improper storage or brake lock.
- Accident, fire, chemical corrosion, tire alteration, willful abuse, or vandalism.
- Tires in which D.O.T. identification number and/or barcode on bead and/or brand name removed intentionally.
- Loss of time or use, inconvenience, or any incidental or consequential damage.
- Original equipment tires on new vehicle. (See separate warranty, if applicable, in your vehicle’s glove box.)
- Tires purchased as used.
- Tires that have been recapped, retreaded, or regrooved.
- Use of tire chains.
- Tires used on recreational vehicles (for camping and motor homes, etc.) or in commercial service (i.e., tires used for taxi service, delivery, ride-sharing vehicles, etc.).
- Tires stored improperly.

NEXEN TOTAL COVERAGE WARRANTY

5. OTHER LIMITATIONS INCLUDE, BUT ARE NOT LIMITED, TO THE FOLLOWING:

- Failure to rotate tires as recommended voids the tread wear warranty.
- If tires are different sizes on front and rear of vehicle and therefore can’t be rotated, the mileage warranty for the rear tires will be half of the stated mileage warranty.
- Winter tires must be used only in winter months, which are determined to be September 1st through April 30th of the following year. Documentation is required showing date of installation and removal to maintain tread wear warranty.

6. ROAD HAZARD REPLACEMENT PROGRAM

Most patterns sold by NEXEN TIRE are covered by a road hazard warranty that protects the consumer against non-repairable damage caused by puncture, snag, cut, bruise, or impact break. Typical road hazards are nails, glass, potholes, and other debris. Covered tires will be eligible for a free replacement for the first 3/32” of original tread depth, or for a period of two years from the date of purchase, whichever comes first. If the D.O.T. identification number on the tire is greater than two years from the adjustment date, an invoice showing date of purchase is necessary. The cost of mounting, balancing, and any other service charges, including applicable taxes, are required to be paid by the consumer.

7. WHAT IS NOT COVERED UNDER ROAD HAZARD REPLACEMENT PROGRAM

- A tire that is damaged due to vandalism.
- A tire that is damaged due to an accident.
- A tire that is repairable under U.S. Tire Manufacturers Association (USTMA).
- A tire that has failed due to commercial use.
- A tire that is damaged or failed due to racing or off-road use.
- A tire that is damaged due to use of snow chains or studs.
- A tire that is damaged or failed due to irregular wear caused by mechanical issues.
- Original equipment tires on new vehicle.
- Tires transferred from the vehicle that they were originally installed on.

8. 45-DAY SATISFACTION GUARANTEE TRIAL WARRANTY

If you’re not completely satisfied for any reason, other than the conditions that are listed in the “WHAT IS NOT COVERED” section with your eligible tires, simply return them with the proof of purchase to the dealer where they were purchased within 45 days or 500 miles, whichever comes first, for a new complete set of NEXEN brand replacements only.

Limitations and Requirements

- This trial warranty only applies to the original purchaser and is non-transferable.
- Any return of less than a full set of tires will not be accepted.
- Proof of purchase must be provided for both the original set and replacement set.
- Tires must be returned undamaged. Tires exhibiting misuse, road hazard, mounting damage, vehicle mechanical-related problems, repairs, improper inflation, vandalism, run flat, and/or any racing activity wear are excluded from this trial warranty.
- Original purchaser pays the amount due on a new replacement tire, less the amount of credit, including applicable taxes, mounting and balancing charges, and/or the cost of other services ordered.
- Replacement tire must be installed on original purchase vehicle.
- Replacement must be done at original place of purchase.
- Only original purchase is covered by 45-day Satisfaction Guarantee Trial Warranty.
- Replacement set is not covered by 45-day Satisfaction Guarantee Trial Warranty.
- Tires measuring more than 1/32” of tread wear from original tread depth are excluded from trial warranty.

9. CONSUMER’S OBLIGATION WHEN FILING CLAIM

To maintain Mileage Tread Wear Warranty and Road Hazard Replacement Program, the consumer is responsible for the following:

- Any claims must be presented to a participating authorized NEXEN TIRE dealer.
- Submit or present a copy of the original purchase receipt with documented automobile mileage at time of tire installation and of tire dismounting.
- Submit a tire rotation record showing that all tires have been rotated at least every 5,000–6,000 miles (8,000–10,000 km). Tire rotation record is not necessary for road hazard claims when tire is within 2/32” difference of remaining tread depth as measured from shoulder to shoulder on the claim tire and compared to the remaining tread depth of the opposite front/rear or left/right tire.
- NEXEN TIRE Claim Adjustment forms are provided by the dealer. Keep a copy for your records and leave the tire with the dealer for warranty processing.

NEXEN TOTAL COVERAGE WARRANTY

Warranty Information by Pattern (for Replacement Tires Only)

Tire Pattern	Tread Wear Mileage Warranty	Road Hazard Replacement Warranty (First 3/32" or 2 Years)	45-day Trial	36-Month Roadside Assistance Program
N'FERA SPORT R	N/A	N/A	N/A	YES
N'FERA SU1	25,000	YES	YES	YES
N'FERA AU7	50,000	YES	YES	YES
N'BLUE 4 SEASON 2	70,000	YES	YES	YES
N5000 PLATINUM	55,000 (W)	YES	YES	YES
	70,000 (H,V)			
N'PRIZ AH8	75,000	YES	YES	YES
N'FERA PRIMUS AS T1	50,000 (W,Y)	YES	YES	YES
	65,000 (H,V)			
CP672	65,000	N/A	N/A	YES
N5000 PLUS	60,000	N/A	N/A	YES
ARIA AH7	80,000	YES	YES	YES
N'PRIZ AH5	60,000	YES	N/A	YES
SB-802	N/A	N/A	N/A	YES
ROADIAN HP	40,000	YES	N/A	YES
ROADIAN GTX	70,000	YES	YES	YES
ROADIAN HTX 2	70,000 (P)	YES	YES	YES
	50,000 (LT)			
ROADIAN HTX 2 (LT225/75R16 & 235/65R16C)	N/A	N/A	YES	YES
ROADIAN HTX RH5	65,000 (P)	N/A	N/A	YES
	40,000 (LT)			
ROADIAN ATX	70,000 (P)	YES	YES	YES
	60,000 (LT)			
ROADIAN AT PRO	50,000 (P)	N/A	N/A	YES
	40,000 (LT)			
ROADIAN MTX	N/A	N/A	YES	YES
ROADIAN MT	N/A	N/A	N/A	YES
ROADIAN CT8 HL	N/A	N/A	YES	YES
ROADIAN CT8	N/A	N/A	N/A	YES
WINGUARD SPORT 2	N/A	N/A	N/A	YES
WINGUARD WINSPIKE 3	N/A	N/A	N/A	YES

10. TIRES PURCHASED FROM UNAUTHORIZED DEALERS

IT IS IMPORTANT TO PURCHASE OUR TIRES FROM AUTHORIZED DEALERS ONLY.

Tires imported by NEXEN TIRE AMERICA INC. are suitable for the U.S. conditions, whereas tires not imported by NEXEN TIRE AMERICA INC. may meet an alternative specification that is less suitable for the U.S. conditions. In addition, unauthorized importers or dealers may provide tires that are several months or years older by the time they arrived in the U.S., or they may have been stored in improper or unfavorable conditions.

Taking them into consideration, in order to provide the best quality of our tires and services, we need to ensure that tires are purchased from an authorized dealer and imported by NEXEN TIRE AMERICA INC. Tires purchased from an unauthorized dealer or not imported by NEXEN TIRE AMERICA INC. ARE NOT COVERED by this warranty. If a tire purchased from an unauthorized dealer or not imported by NEXEN TIRE AMERICA INC. fails or is defective, all claims relating to that tire should be directed to the dealer or importer and not to NEXEN TIRE AMERICA INC.

Please note that sellers on eBay.com, Craigslist, or similar online markets are not authorized dealers of NEXEN branded tires. When purchasing on these online markets, it is fully your responsibility as a customer to ensure that sellers are authorized by NEXEN TIRE AMERICA INC. The following businesses have been identified as unauthorized by NEXEN TIRE AMERICA INC. to sell NEXEN branded tires in the U.S. The list is subject to change/update.

- TGI (TIRE GROUP INTERNATIONAL)
- TIREMAX INTERNATIONAL
- PARTSMAX

If you are concerned about whether sellers are authorized by us, please contact us at 1-800-57-NEXEN (63936), and we can verify whether the seller is authorized or tires are imported by NEXEN TIRE AMERICA INC.

11. ROADSIDE ASSISTANCE

All patterns sold after January 1, 2025, by NEXEN TIRE in the United States are eligible for free 24/7/365 Roadside Assistance for a period of 36 months from the purchase date. Upon purchasing NEXEN tires, the consumer will have access to a toll-free phone number to call in case of a flat tire. A qualified professional will change your flat tire with your spare tire free of charge. If a working spare is not available, towing will be provided free of charge to the nearest NEXEN TIRE dealer or safe and secure location. Activation is required before Roadside Assistance service can be utilized.

NEXEN TIRE reserves the right to change the terms and conditions of all warranties at any time.

NEXEN TOTAL COVERAGE WARRANTY

12. TIRE CARE AND MAINTENANCE GUIDE

Tire failure can result in serious damage and/or personal injury. To reduce the risk of tire failure, we recommend the following:

- Maintain proper inflation pressure, and do not use at under-inflation or over-inflation. Pressure should be set at the level recommended by vehicle manufacturer.
- Wheel alignment and balancing should be checked at regular intervals.
- Do not overload. The maximum load-carrying capacity is molded on the sidewall of the tire.
- Do not spin your tires excessively, and avoid driving over curbs, potholes, obstacles, and edges of pavement.
- Never drive on smooth (bald) tires. By law, tires must be replaced when 2/32" of tread depth remains, as indicated by tread wear indicator molded in the tread grooves.
- Check your tires frequently for any scrapes, cuts, foreign objects, separations, or bulges. If damage is found, do not attempt to dismount the tire yourself. Change damaged tire with the spare, and contact your local authorized NEXEN TIRE dealer immediately.
- Do not drive in excess of speed limits allowed by law or the maximum speed justified by driving conditions.
- To achieve proper even wear and gain maximum tread life, tire rotation at regular intervals is required.

Please be advised that the extreme ultra high performance tire, N'Fera Sport R, although approved for street use, is targeted for track and competition driving.

- Driving on wet roads, heavy rain, or standing water with competition-oriented tires may cause hydroplaning and loss of control. Use extreme caution and drive slowly on wet roads.
- Competition-oriented tires should not be driven on snow- or ice-covered roads. At temperatures below 40°F, tires may experience reduced traction. It is recommended that suitable all-season or winter tires be installed at temperatures below 40°F.
- When exposed to temperatures below 20°F, tires may exhibit surface cracking. Never use tires that have cracked. Surface cracking due to cold temperatures is not a warrantable condition.
- Always store competition-oriented tires indoors at temperatures above 20°F. If tires have been subjected to temperatures below 20°F, they must be warmed to at least 50°F for 24 hours before using or installing. If using unheated storage, tires should be removed from the vehicle and deflated to half the normal air pressure. Before use, tires must be inspected for signs of cracking and returned to normal air pressure.

For more information or service regarding NEXEN TIRE, please contact your nearest authorized NEXEN TIRE dealer.

For more information, please call the toll-free technical support number: 1-800-57-NEXEN (63936) / 1-866-70-NEXEN (63936)

NEXEN warranty portal warranty assistance link: service.nexentireonline.com

(Please use this link for any customer warranty assistance needed)



NEXEN NEXEN TIRE

NEXEN TIRE AMERICA INC.

Corporate Headquarters

4014 Wheatley Road, Richfield, OH 44286

T: (800) 576-3936

E: info@nexentireusa.com

NexenTireUSA.com